


Specifications

TANKS

Vinylester resin bodies have two threaded side connections and one 2-3/4" or 4" top opening with threaded gasketted closure. Tanks rated to 150 psi at 150°F.

MODEL	CAPACITY			DIMENSIONS (IN.)				CLOSURE (IN.)	CONN. (IN.)	SHIP WT.
	GAL.	CU. FT.	LBS.*	A	B	C	D			
BR-2	2.3	0.3	15	18-1/2	6	9-3/8	4-5/8	2-1/2	3/4 NPT	5 lbs.
BR-5	5.0	0.7	40	30-1/2	7	21	4-1/4	2-1/2	3/4 NPT	8 lbs.
BR-10	10.0	1.4	80	35-3/8	10	23-3/4	5-1/2	4	3/4 NPT	17 lbs.

*Capacity in lbs. of tablets; capacity reduced by 50% for granular product.

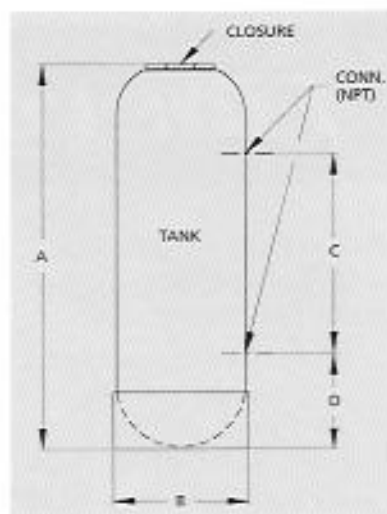

PIPING KIT


PVC threaded fittings for operation to 120 psi at 100°F. Kit contains: two strainers, three ball valves, two tees, two 90° elbows, required nipples and plugs.

MODEL	DESCRIPTION	USE WITH	SHIP WT.
BP-75	3/4" NPT Piping Kit includes two 3/4" x 1/2" bushings to adapt flow indicators.	BR-2, BR-5, BR-10	5 lbs.

FLOW INDICATORS

5% accuracy, Polysulfone and CPVC with 316SS float. Male pipe connections rated to 150 psi at 120°F.

MODEL	RANGE (GPM)	CONN. (NPT)	USE WITH	SHIP WT.
FI-1	0.1- 1	1/2"	BR-2, BR-5, BR-10	1 lb.
FI-2	0.2- 2	1/2"	BR-2, BR-5, BR-10	1 lb.
FI-5	0.5- 5	1/2"	BR-5, BR-10	1 lb.
FI-10	1- 10	3/4"	BR-10	2 lbs.

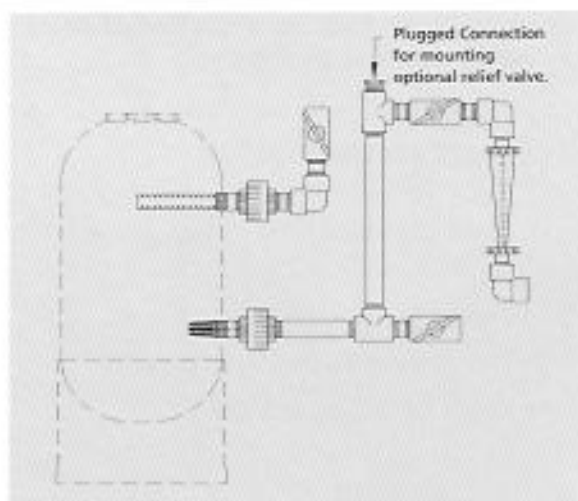


RELIEF VALVE

Specify RV-BR for 1/2" PVC safety relief valve. (Required for bromine service.)

FUNNELS

Polyethylene funnels are available in two sizes to fit the 2-1/2" or 3-3/4" top opening of the bromine feeder body. A third funnel is offered which screws onto 5-gallon plastic pails with threaded tops.

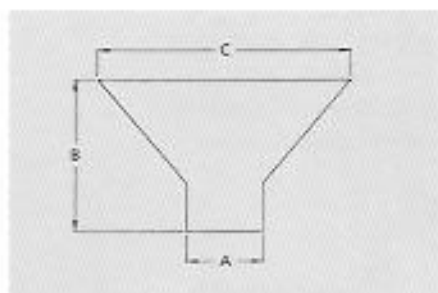

PART NUMBER	FITS MODELS	A	B	C
106894	BR-2, BR-5	2-3/8"	7-1/2"	9-1/2"
106807	BR-10, BR-25	3-1/2"	7"	11-1/2"
107898	*See note below	4-1/2"	6-1/2"	12-3/4"

*Note:

Must be used in addition to one of the funnels above because outlet of this funnel is too large to fit tank opening.

DUAL SIZE CLOSURE WRENCH

Glass filled polypropylene wrench fits both 2-1/2" and 4" closures.

PART NUMBER 107282



SOLD BY:

P.O. Box 247 • Lansdale, PA 19446-0247
 Tel: 215-699-8700 • Fax: 215-699-0370
 Toll-Free Tel: 1-888-3NEPTUNE (1-888-363-7886)
 Toll-Free Fax: 1-800-255-4017
 Web Site: <http://www.neptune1.com>
 E-mail: pump@neptune1.com