




XBC-KZ10G (LVDS / CVBS) Block Camera

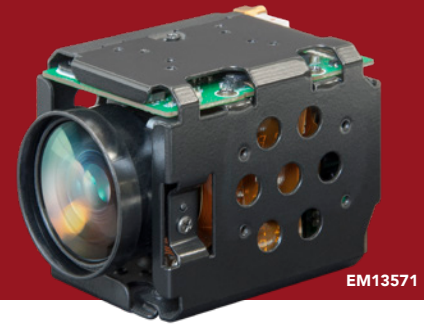

EM13571

Features

- 1/2.9" Progressive Scan CMOS (Global Shutter)
- 120x AF Zoom
(10x optical zoom, 12x digital zoom)
- External Sync
- 720P 60 / 50 / 30 / 25 fps
- Mechanical Day & Night
- True WDR, 3D DNR, Defog
- UART RS232-TTL (VISCA / AFP / PELCO)
- LVDS / CVBS Outputs

Pin Assignment	Pin no.	J303 (Micro Co-Axial) / KEL Co.USL00-30L-C
	1	TX_OUT3+
	2	TX_OUT3-
	3	TX_CLKOUT+
	4	TX_CLKOUT-
	5	TX_OUT2+
	6	TX_OUT2-
	7	TX_OUT1+
	8	TX_OUT1-
	9	TX_OUT0+
	10	TX_OUT0-
	11	GND
	12	TXD: CMOS 5.0V Send Data (Compatible 3.3V)
	13	RXD: CMOS 5.0V Read Data (Compatible 3.3V)
	14	+12VDC
	15	+12VDC
	16	+12VDC
	17	+12VDC
	18	+12VDC
	19	GND
	20	GND
	21	TX_OUT7+: Single out mode (open)
	22	TX_OUT7-: Single out mode (open)
	23	TX_OUT6+: Single out mode (open)
	24	TX_OUT6-:Single out mode (open)
	25	CVBS Output
	26	RESET_IN: Reset - Low (GND), Norma (1.8V)
	27	TX_OUT5+
	28	TX_OUT5-
	29	TX_OUT4+
	30	TX_OUT4-

Pin no.	CN307 (RS-232 TTL) / JST: SM03B-SRSS-TB
1	GND
2	RxD: CMOS 3.3V Read Data
3	TxD: CMOS 3.3V Send Data
Pin no.	CN303 (External D&N) / JST: SM03B-SRSS-TB
1	Ext_D&N: External D&N Input
2	GND
3	+3.3V Out (For sensor)
Pin no.	CN301(External I/O) / JST: SM08B-SRSS-TB
1	Vsync_OUT
2	Hsync_OUT
3	VCLK_OUT
4	GND
5	Vsync_IN
6	Hsync_IN
7	VCLK_IN
8	GND
Pin no.	CN302 (External I/O) / JST: SM04B-SRSS-TB
1	Trig_Common
2	Trigger_IN
3	Strobe_Common
4	Strobe_IN



303 State Route 94 | Columbia, NJ 07832 | www.intertest.com

Office: 908.496.8008 | **Hours:** M-F, 8am to 5pm EST | **Email:** service@intertest.com

Video System		XBC-KZ10G - (LVDS / CVBS - EM13571)
Image Sensor		1/2.9" SONY Progressive Scan Global Shutter CMOS
Effective Pixels		1.58MP 1456(H) x 1088(V)
Video Output Mode		LVDS / CVBS
Max. Video Resolution		LVDS :720p@60 / 50 / 30 / 25fps
Synchronization System		Internal / External Option
Min.Illumination		
Min.Illumination		"Day mode: 0.05Lux(F1.6) Night mode: 0.03Lux(F1.6/ IR-cut filter on) DSS OFF, AGC28dB"
S/N Rate		More than 52dB(AGC off, DSS off)
Lens		
Lens	Type	AF Optical zoom lens(DC Iris), IR Corrective
	Focal Length	f=5.1mm~51mm
	F-value	F1.6(W)~1.8(T)
	Angle of View	Horizontal 54.0°(W)~4.9°(T), Vertical 31.0°(W)~4.0(T)°
Zoom Ratio		Optical 10x / Digital 12x
Focus Min.Working Distance		0.01m(Wide)/1.0m(Tele)~∞
Focus Control		Auto/Manual/Interval/One Shot/Preset
Exposure		
AE mode		Auto/Shutter Priority/Iris Priority/Manual/Bright
Brightness		0~14
Manual Shutter		x32~x2(Low shutter), 1/30(25), 1/60(50)~1/30000
Manual Iris		F1.6~F19, Close
Sense-up		Off~32fields
ETC		Spot AE, Slow AE
Functions		
D&N Mode		Auto/Day(Color)/Night(BW)/External-H or L
White Balance		AUTO/ATW/Indoor/Outdoor/Push/Manual
Image Freeze		Off/On
Image Flip		Off/Horizontal/Vertical/H+V(180° Flip)
Privacy Mask Zone		16 Zones/14 mask color selectable, semi-transparency
Digital Image Stabilization		Yes
Motion Detection		4 Zones
D-WDR		Off/Low/Middle/High
WDR		Off/Low/Middle/High
BLC		Off/On, Area selectable
HLC		Off/0~20, Color selectable
AGC		Max.58dB
Sharpness		Adjustable(0~15)
3D-DNR		On/Off(1~5)
2D-DNR		Auto/Manual
Defog		Off/Low/Middle/High
Preset Position		256 position Presets(Zoom,Focus), 16Memory Presets, Custom Preset
Language		English,Japanese,Russian,Spanish,German,France,Portuguese,Chinese
Communication		
UART	Remote	RS232 TTL +5.0V(+3.3V compatible)
	Protocol	VISCA/Pelco-D/Pelco-P/Hitachi: Automatic detection
	Baud rate	2400/4800/9600/19200/38400/57600/115200bps
UTC		-
Power		
Supply Voltage		12VDC(7V to 15VDC)
Power Consumption		Max.5.2W / Non-working zoom&focus 3.2W
Physical and Temperature		
Dimension(mm)		41.6X45X61.6mm
Weight		Approx.124g
Operating Temperature		-10°C~+50°C, Humidity(20~80%)
Storage Temperature		-20°C~+60°C, Humidity(20~95%)