




120 Ton Ironworker 380V, 3Ph, 50Hz with PowerLink

Product Images

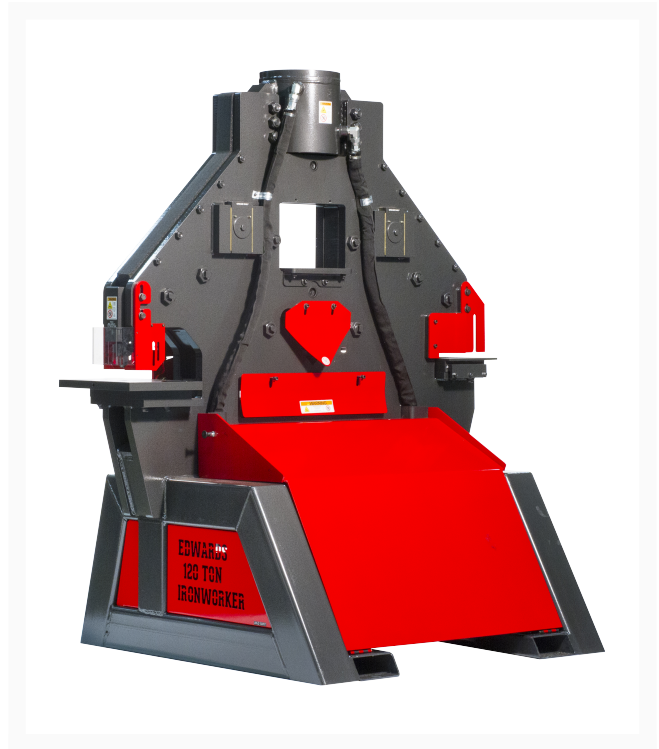

Short Description

120 Ton Ironworker 380V, 3Ph, 50Hz with PowerLink

Additional Information

Stock Number	ED9-IW120-3P380-A
Amps	16.4
Angle Iron Capacity (Size/Min Dia.)	6 x 6 x 1/2
Angle Shear Max Capacity 1/2"	6 x 6
Angle Shear Max Capacity (In.)	6 x 6 x 1/2
Angle Shear Work Height (In.)	52-1/2
Coper Notcher Max Capacity (In.)	3 x 6 x 1/2
Coper Notcher Work Height (In.)	40
Flat Bar Shear Max Capacity 1"	12
Flat Bar Shear Max Capacity 1/2"	24
Flat Bar Shear Max Round Capacity (In.)	1-1/4
Flat Bar Shear Max Round (In)	1-1/4
Flat Bar Shear Max Square (In)	1-1/4
Flat Bar Shear Rating (Tons)	120
Flat Bar Shear Work Height (In.)	33-1/4
Gross Weight (Lbs)	5975
Hydraulic Pump (GPM)	24
Hydraulic Reservoir (Gal.)	17
Hydraulics (GPM)	24
Hydraulics (PSI)	3800
Model Number	IW120-3P380-AC900
Motor Amps	16.4
Motor (HP)	10 HP 3 ~ 380V, 50 Hz
Motor Speed (RPM)	1770
Overall Dimensions (L x W x H) (In.)	60 x 60 x 84

Product Dimensions (In.)	60 x 60 x 84
Prop 65	Cancer and Reproductive Harm
Punch Max Capacity (In.)	1-1/2 diam. in 1 mild steel
Punch Open Height (In)	9-1/8
Punch Rating (Tons)	120
Punch Shut Height (In)	7-1/8
Punch Stroke (In.)	2
Punch Work Height (In.)	36-5/8
Rating (Tons)	120
Reservoir (Gal.)	17
Shipping Dimensions (L x W x H) (In.)	60 x 67 x 87
Valve Pressure (PSI)	3800
Weight (Lbs.)	5500

