



Cambridge Rollerball & Fountain Pen Kits

Product #148463, 149942, 149943, 149944, 149945



General Instructions


Whether you're a novice turner or a pro, you'll find these projects are all quick and easy to make. Using cut-offs and shorts, the type everyone saves but doesn't know what to do with, you'll find yourself making handsome, custom woodturning projects which are great for gifts or for sale. The following is general in nature, please refer to the instruction sheet on the opposite side for specific dimensions and sizes for your project.

1. Cutting Blanks

Cut wooden blanks to the size specified in the enclosed instructions. For your safety, be sure that the blanks are solid and have no holes, checks or other defects.

2. Drilling Blanks

Center and bore a hole through your stock as specified in the Project Instructions on the opposite side. The center of the blank can be located at the intersection of diagonal lines, drawn from opposite corners. All holes are easily drilled using a clamp and a drill press (FIG. 1). Before you start to drill be sure that your blank is at 90° to the drill press table. You may also chuck and drill the stock on your lathe.

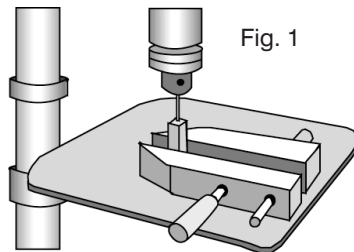


3. Gluing Blanks to Tubes

Rough the brass tube's surface with a fine grit sandpaper and use a quick drying CA type glue to secure the brass tubes into the blanks. Rotate the tube as you insert it to ensure maximum surface coverage of glue. If you find that CA glue is not providing adequate bonding, an alternative is any two part epoxy type glue.

4. Sanding Blanks to Length

Using a belt or disc sander, square the ends of the brass tube/wood blank. The blank should be flush with the brass tube on both ends. Care should be taken to not sand into the tubes (FIG. 2). If any excess glue remains inside the tubes it should be gently scraped out.

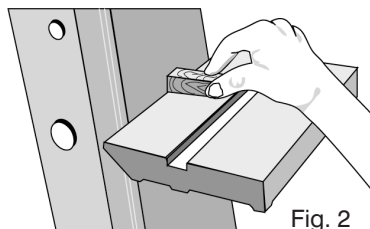

Tip: Excess glue can be scraped out using the threaded end of the mandrel when mounting the blanks for turning.

5. Mandrel Preparation

Woodcraft's new Pen and Pencil Maker's Mandrel system allows you to turn a variety of small projects without requiring the purchase of a unique, special mandrel each time. The only item you will need to purchase to turn new projects is the specially designed bushing set for the project of your choice. The mandrel is provided with either a #1 Morse Taper or a #2 Morse Tape. If you prefer to use the mandrel in a three jaw chuck, simply loosen the Morse Taper set screw and slide the Morse Taper off of the shaft. Now the mandrel shaft may be mounted directly in your three jaw chuck. With the bushing sets specified on the project instruction sheet, mount your wood blanks and bushings as depicted for each project. With the mandrel mounted in your lathe, slide a bushing onto the mandrel, followed by a wood blank and a second bushing or spacer as required, followed by the second wood blank if required. With the wood blanks installed on the mandrel secure the wood blank/bushing assembly using the washer and retaining nut provided. Bring up a live center in the tailstock to support the threaded end of the mandrel. Do not over tighten the tailstock or the mandrel will flex and bend causing oval shaped turnings.

6. Turning Blanks

Place your tool rest parallel and as close as possible to the blank. Rotate the blank by hand to ensure it will not touch the tool rest when the lathe is turned on. Using a turning speed of approximately 1,000 RPM begin turning the blank to a diameter slightly larger than the bushings. You can work the stock down to just short of the desired design or diameter by carefully scraping or sanding.

7. Finishing the Blanks

Blanks can be finished like any other wood project. Using a fine grit sandpaper, sand the blank until it is flush with the bushing for parallel sided projects or until the desired profile is obtained for custom projects. Use a wood filler, if desired, to fill any grain openings in the blank. Final sanding with a wet/dry paper will create a blank which is glass smooth. *Tip: We have found that use of Micro Mesh sanding paper after wet/dry sanding creates a perfect, glass smooth finish.*

8. Assembly

All parts should fit together as depicted in the parts diagram for each project. In some cases a machinist vise will be needed to completely press the parts together. Protect all plated parts from scratching by covering them with a cloth or thin pad before placing them in a vise. Proceed carefully, many of the kit components are delicate and uneven or excessive pressure will cause permanent damage.



Cambridge Rollerball & Fountain Pen Kits

Product #148463, 149942, 149943, 149944, 149945

1. Cutting Blanks

Cut two blanks $\frac{3}{4}$ " x $\frac{3}{4}$ " and each slightly longer than the two provided brass tubes. One blank will be approximately $1\frac{3}{4}$ " long (pen top), the other approximately $2\frac{1}{16}$ " long (pen bottom).

2. Drilling Blanks

Using a $\frac{33}{64}$ " bit (#149836) drill a hole lengthwise through the center of the shorter blank (pen top). Repeat for the longer blank (pen bottom) using a $\frac{31}{64}$ " bit (#149835).

3. Gluing Blanks to Tubes


See General Instructions for details.

4. Sanding Blanks to Length

See General Instructions for details.

5. Mandrel Preparation

Mount the blanks and bushings (#144635) on the lathe mandrel in the following order. Place one of the smaller diameter bushing on the mandrel with the lip facing the tailstock end of the lathe. Slide the longer tube/blank (pen bottom) over the bushing lip ensuring that it seats tightly against the shoulder, followed by the other smaller diameter bushing ensuring that the lip of the bushing seats tightly against the shoulder. Next place one of the larger diameter bushings onto the mandrel with the lip facing the tailstock followed by the shorter tube/blank (pen top) ensuring that it that it seats tightly against the shoulder of the bushing. Finish the mandrel assembly by placing the last larger diameter bushing on the mandrel ensuring that the lip of the bushing seats tightly against the shoulder. Secure the assembly with the mandrel nut and washer.

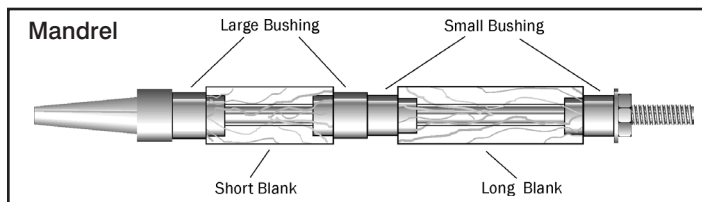

6. Turning the Blanks

See General Instructions for Details.

7. Finishing the Barrels

See General Instructions for details.

8. Assembly

Bottom Assembly

Press the nib holder (B) into the longer tube (C). Place one of the filigree rings (F) followed by one of the trim rings (E) onto the receiver holder (D) and press into the other end of the longer tube (C). Screw the cap receiver (H) into the receiver holder (D).

Rollerball Only

Drop the spring (G) into the tube through the nib holder (B), large end of the spring first. Insert the rollerball refill through the nib holder (B) and secure with the rollerball nib (A).

Fountain Pen Only

Plug the pump (S) or ink cartridge (R) into the fountain pen nib (Q), and screw assembly into the nib holder (B).

Top Assembly

Place one of the accent rings (E) onto the center ring retainer (J) followed by the last filigree ring (F) and the last accent ring (E), once assembled press into one end of the shorter tube (L). Next, press the pocket clip/finial cap mount (M) into the other end of the shorter tube, press the clip mount in until the shoulder of the bushing is flush with the top of the wood. The threads will be sticking out. Slide the clip retainer ring (N) recess up onto the finial cap mount (M) followed by the clip (O) which will need to rest in the notch on the retainer ring (N). Secure the assembly with the finial cap nut (P).

Related Project Items

- 149437 Instant Bond CA Adhesive Thick 4 oz.
- 124270 System Three 5 Minute Epoxy $\frac{1}{2}$ Pint
- 149431 Instant Bond CA Adhesive Thin 4 oz. (finishing)
- 145982 Micro-Mesh Pen Sanding Kit

