



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E, PART 27

MEASUREMENT AND TEST REPORT

For

Quanshun Communication Technology Co., Ltd

Quanshun Bldg., Daxiamei, Nan'an, Quanzhou, Fujian, China

FCC ID: 2ADQZTP4GNX

Report Type: Original Report	Product Type: PTT Network Radio
Report Number: RXM190410052-00B	
Report Date: 2019-05-13	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 , §2.1093 - RF EXPOSURE.....	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC.....	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50- RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	28
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	49
FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS.....	68
APPLICABLE STANDARD	68
TEST PROCEDURE	68
TEST EQUIPMENT LIST AND DETAILS.....	69
TEST DATA	70
FCC §22.917(A) & §24.238(A) & §27.53- BAND EDGES.....	72
APPLICABLE STANDARD	72
TEST PROCEDURE	72
TEST EQUIPMENT LIST AND DETAILS.....	72

TEST DATA	73
FCC §2.1055, §22.355 & §24.235 & §27.54- FREQUENCY STABILITY.....	109
APPLICABLE STANDARD	109
TEST PROCEDURE	109
TEST EQUIPMENT LIST AND DETAILS.....	110
TEST DATA	110

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	PTT Network Radio
EUT Model:	N56
Multiple Models:	N2X, N3X, N4X, N5X, N50, N55, N56, N57, N58, N59
Rated Input Voltage:	DC7.4V from battery
Adapter Information	Model: WA-36A12
	Input: 100-240V~50/60Hz, 0.9A Max.
	Output: 12V3A
The Highest Operating Frequency:	2690MHz
External Dimension:	55mm(L)*30mm(W)*115mm(H)
Serial Number:	190410052
EUT Received Date:	2019.4.15

Notes: Model N56 was selected for fully testing, the detailed information about the difference among N2X, N3X, N4X, N5X, N50, N55, N56, N57, N58, N59 and model N56 can be referred to the declaration letter which was stated and guaranteed by the manufacturer.

Objective

This report is prepared on behalf of **Quanshun Communication Technology Co., Ltd** in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E Part 27 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

No related submittal.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
 Part 24 Subpart E - Personal Communication Services
 Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode. The device operates on WCDMA Band 2/5, and LTE band 2/4/5, test was performed with channels as below table:

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
WCDMA Band 2	4.2	1852.4	1880	1907.6
WCDMA Band 5	4.2	826.4	836.6	846.6
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
	1.4	1710.7	1732.5	1754.3
LTE Band 4	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745
	1.4	824.7	836.5	848.3
LTE Band 5	3	825.5	836.5	847.5
	5	826.5	836.5	846.5
	10	829	836.5	844

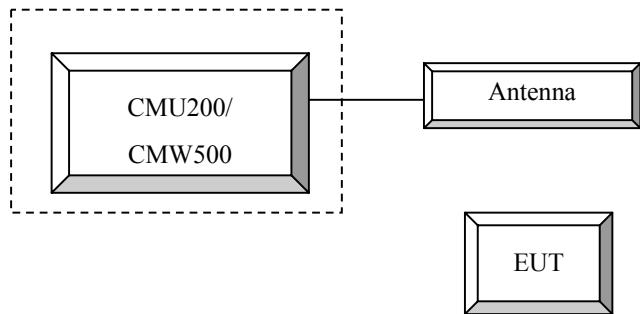
Equipment Modifications

No modification was made to the EUT.

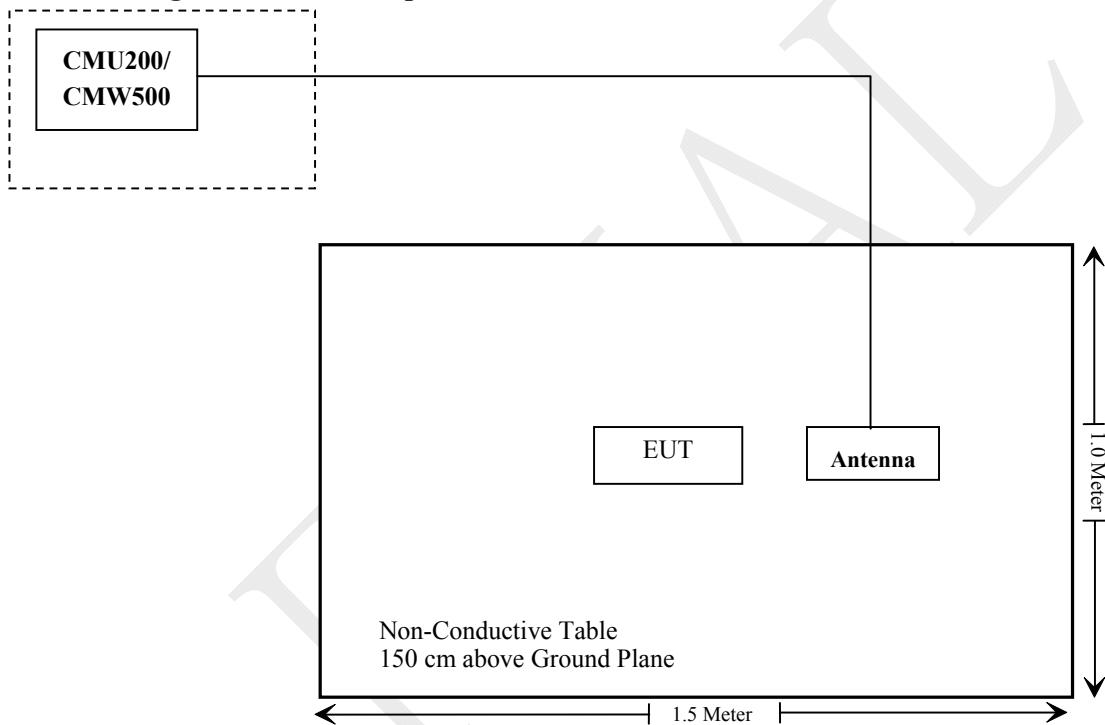
Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universial Radio Communication Tester	CMU200	109038
R&S	Wideband Radio Communication Tester	CMW500	147473

Configuration of Test Setup



Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §1.1310 & §2.1093	RF Exposure	Compliance
FCC§2.1046;§ 22.913 (a); § 24.232 (c);§27.50	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
FCC§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53;	Spurious Emissions at Antenna Terminal	Compliance
FCC§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
FCC§ 22.917 (a); § 24.238 (a); §27.53;	Out of band emission, Band Edge	Compliance
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 , §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093

Test Result

Compliant, please refer to the SAR report: RXM190410052-20.

FINAL

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FINAL

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50- RF OUTPUT POWER**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure**WCDMA-Release 99**

The following tests were conducted according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta c / \beta d$	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
HSDPA Specific Settings	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
HSDPA Specific Settings	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
HSUPA Specific Settings	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCl	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.

Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	*	*	*	*	*

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA-603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2019-02-24	2020-02-24
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03
R&S	Universal Radio Communication Tester	CMU200	106 891	2018/12/14	2019/12/14
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.1~27.5°C
Relative Humidity:	61~64 %
ATM Pressure:	100.2~100.8kPa

* The testing was performed by Vern Shen Vito Chen,Elena Lei from 2019-04-23 to 2019-04-29.

Conducted Output Power**WCDMA Band II**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.25	3.08	22.64	3.04	22.35	3.08
HSDPA	1	20.42	3.43	20.83	4.33	20.55	3.59
	2	20.03	3.95	20.57	4.20	21.07	3.46
	3	20.03	3.30	21.09	4.59	20.55	3.20
	4	20.42	3.56	20.57	4.85	20.68	3.33
	5	20.48	3.65	20.23	4.36	19.99	4.58
HSUPA	2	21.00	3.52	20.88	4.88	20.51	4.32
	3	20.09	4.17	20.75	4.23	20.38	4.19
	4	20.87	3.39	20.15	4.75	20.33	4.45
	5	21.00	3.78	20.11	4.62	20.64	4.45
	1	20.09	4.30	20.10	4.23	20.36	4.71
DC-HSDPA	2	20.87	3.39	20.09	5.01	20.03	5.23
	3	21.13	4.04	20.60	5.01	20.16	5.23
	4	20.74	4.17	20.23	4.23	20.12	5.10
	HSPA+	1	20.35	3.52	20.62	4.75	20.13

WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.61	3.01	22.67	2.95	22.62	2.82
HSDPA	1	21.32	3.24	21.55	3.17	21.59	3.46
	2	20.93	3.63	21.94	3.04	22.11	3.72
	3	21.19	2.98	22.07	3.30	21.20	3.98
	4	21.06	3.50	22.20	3.43	21.59	3.59
	5	20.97	3.94	21.08	3.59	21.01	3.14
HSUPA	2	21.49	4.07	21.73	3.98	21.40	3.01
	3	20.84	3.94	21.60	4.11	21.01	3.79
	4	21.62	3.94	21.73	3.20	20.88	2.88
	5	20.84	3.94	20.95	3.72	21.66	2.88
	1	21.49	4.46	21.73	4.11	21.53	2.88
DC-HSDPA	2	20.71	4.33	21.08	4.11	21.27	2.75
	3	21.23	4.59	20.82	3.20	21.53	3.53
	4	20.71	3.68	21.47	4.24	21.66	2.88
	HSPA+	1	20.84	4.59	21.08	4.11	21.14

LTE Band 2

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	22.95	23.25	22.15
		RB1#3	22.84	23.34	22.31
		RB1#5	22.80	23.24	21.99
		RB3#0	22.73	23.15	22.08
		RB3#3	22.71	23.16	22.03
		RB6#0	21.74	22.19	21.09
	16QAM	RB1#0	21.85	22.13	20.99
		RB1#3	21.87	22.29	21.14
		RB1#5	21.67	22.27	20.80
		RB3#0	21.69	22.14	21.05
		RB3#3	21.73	22.21	20.95
		RB6#0	20.67	21.18	20.03
3MHz	QPSK	RB1#0	22.73	23.21	22.38
		RB1#8	22.75	23.08	22.20
		RB1#14	22.80	23.07	22.15
		RB6#0	21.79	22.08	21.17
		RB6#9	21.72	22.06	21.14
		RB15#0	21.76	22.17	21.14
	16QAM	RB1#0	21.55	21.94	21.21
		RB1#8	21.66	21.80	21.23
		RB1#14	21.59	22.02	21.09
		RB6#0	20.63	21.06	20.15
		RB6#9	20.56	21.10	19.96
		RB15#0	20.71	21.11	20.14
5MHz	QPSK	RB1#0	22.64	23.08	22.35
		RB1#13	22.62	23.09	22.21
		RB1#24	22.62	23.03	22.08
		RB15#0	21.73	22.13	21.27
		RB15#10	21.72	22.04	21.20
		RB25#0	21.72	22.08	21.27
	16QAM	RB1#0	21.53	22.07	21.43
		RB1#13	21.58	22.00	21.34
		RB1#24	21.59	22.25	21.24
		RB15#0	20.63	21.13	20.19
		RB15#10	20.62	21.11	20.16
		RB25#0	20.55	21.15	20.16

10MHz	QPSK	RB1#0	22.69	23.12	22.77
		RB1#25	22.69	23.24	22.63
		RB1#49	22.91	23.10	22.36
		RB25#0	21.73	22.03	21.39
		RB25#25	21.70	22.06	21.32
		RB50#0	21.73	22.16	21.46
	16QAM	RB1#0	21.64	22.08	21.64
		RB1#25	21.75	22.21	21.62
		RB1#49	21.75	21.97	21.23
		RB25#0	20.68	21.11	20.34
		RB25#25	20.80	21.14	20.26
		RB50#0	20.64	21.17	20.36
15MHz	QPSK	RB1#0	22.74	23.00	22.85
		RB1#38	22.91	23.12	22.44
		RB1#74	23.07	23.09	22.19
		RB36#0	21.70	22.10	21.36
		RB36#39	21.91	22.23	21.25
		RB75#0	21.74	22.09	21.43
	16QAM	RB1#0	21.57	21.95	21.72
		RB1#38	21.81	22.08	21.17
		RB1#74	21.79	21.97	21.48
		RB36#0	20.58	21.15	20.64
		RB36#39	20.91	21.23	20.24
		RB75#0	20.67	21.14	20.52
20MHz	QPSK	RB1#0	22.60	23.01	22.84
		RB1#50	22.94	23.34	22.58
		RB1#99	22.93	23.11	22.31
		RB50#0	21.73	22.01	21.59
		RB50#50	21.88	22.17	21.47
		RB100#0	21.77	22.01	21.50
	16QAM	RB1#0	21.53	21.70	21.85
		RB1#50	21.88	22.05	21.58
		RB1#99	21.89	21.91	21.26
		RB50#0	20.59	21.09	20.81
		RB50#50	20.82	21.14	20.45
		RB100#0	20.73	21.07	20.62

LTE Band 4

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	20.82	22.85	22.92
		RB1#3	23.03	22.87	23.04
		RB1#5	23.01	22.90	22.98
		RB3#0	22.84	22.88	22.76
		RB3#3	22.87	22.84	22.88
		RB6#0	21.82	21.88	21.91
	16QAM	RB1#0	21.80	21.76	21.77
		RB1#3	21.91	21.83	21.99
		RB1#5	21.90	21.66	21.87
		RB3#0	21.81	21.72	21.79
		RB3#3	21.78	21.82	21.93
		RB6#0	20.91	20.93	20.89
3MHz	QPSK	RB1#0	22.84	22.92	22.78
		RB1#8	22.86	22.86	22.80
		RB1#14	22.85	22.81	23.00
		RB6#0	21.78	21.87	21.64
		RB6#9	21.82	21.81	21.89
		RB15#0	21.81	21.87	21.80
	16QAM	RB1#0	21.69	21.80	21.61
		RB1#8	21.64	21.73	21.69
		RB1#14	21.65	21.82	21.84
		RB6#0	20.81	20.83	20.62
		RB6#9	20.78	20.81	20.85
		RB15#0	20.85	20.80	20.81
5MHz	QPSK	RB1#0	22.74	22.81	22.77
		RB1#13	22.81	22.80	22.84
		RB1#24	22.71	22.86	23.05
		RB15#0	21.84	21.87	21.76
		RB15#10	21.74	21.88	22.01
		RB25#0	21.80	21.90	21.84
	16QAM	RB1#0	21.75	21.89	21.75
		RB1#13	21.79	21.83	21.95
		RB1#24	21.79	21.88	22.11
		RB15#0	20.86	20.86	20.84
		RB15#10	20.85	20.92	20.97
		RB25#0	20.80	20.88	20.87

10MHz	QPSK	RB1#0	22.95	22.89	23.01
		RB1#25	22.98	23.01	23.04
		RB1#49	22.96	22.82	23.26
		RB25#0	21.81	21.87	21.69
		RB25#25	21.76	21.87	21.91
		RB50#0	21.75	21.93	21.62
	16QAM	RB1#0	21.79	21.82	21.72
		RB1#25	21.90	21.81	21.54
		RB1#49	21.54	21.58	21.83
		RB25#0	20.87	20.90	20.70
		RB25#25	20.82	20.90	20.79
		RB50#0	20.83	20.89	20.68
15MHz	QPSK	RB1#0	22.81	22.63	23.08
		RB1#38	22.77	22.71	22.89
		RB1#74	22.88	22.77	23.09
		RB36#0	21.81	21.89	21.74
		RB36#39	21.91	21.94	21.92
		RB75#0	21.72	21.93	21.74
	16QAM	RB1#0	21.82	21.70	21.83
		RB1#38	21.77	21.80	21.62
		RB1#74	21.81	21.77	21.86
		RB36#0	20.83	20.87	20.78
		RB36#39	20.92	20.91	20.90
		RB75#0	20.81	20.88	20.75
20MHz	QPSK	RB1#0	22.77	22.94	22.85
		RB1#50	22.84	23.08	22.80
		RB1#99	22.94	23.06	22.90
		RB50#0	21.77	21.96	21.94
		RB50#50	21.89	21.88	21.78
		RB100#0	21.89	21.94	21.79
	16QAM	RB1#0	21.80	21.56	21.93
		RB1#50	22.06	21.65	21.77
		RB1#99	22.06	21.58	21.96
		RB50#0	20.85	20.86	20.99
		RB50#50	20.91	20.90	20.80
		RB100#0	20.94	20.91	20.89

LTE Band 5

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	23.85	23.99	23.90
		RB1#3	24.03	24.05	24.05
		RB1#5	24.04	24.00	23.92
		RB3#0	23.81	23.92	23.95
		RB3#3	23.85	24.00	23.99
		RB6#0	22.87	22.92	22.98
	16QAM	RB1#0	22.81	22.86	22.85
		RB1#3	22.97	23.04	22.97
		RB1#5	23.06	22.82	22.95
		RB3#0	22.95	22.95	22.86
		RB3#3	22.88	23.00	22.93
		RB6#0	21.89	21.92	21.96
3MHz	QPSK	RB1#0	23.85	23.82	23.96
		RB1#8	23.98	23.87	24.01
		RB1#14	23.85	24.02	24.03
		RB6#0	22.85	22.88	22.90
		RB6#9	22.86	22.93	22.93
		RB15#0	22.90	22.85	22.97
	16QAM	RB1#0	22.63	22.72	23.05
		RB1#8	22.89	22.74	22.97
		RB1#14	22.75	22.86	23.01
		RB6#0	21.82	21.73	21.91
		RB6#9	21.74	21.81	21.87
		RB15#0	21.88	21.87	21.96
5MHz	QPSK	RB1#0	23.79	23.85	23.76
		RB1#13	23.78	23.91	23.88
		RB1#24	23.90	23.91	23.86
		RB15#0	22.91	22.83	22.90
		RB15#10	22.82	22.94	23.00
		RB25#0	22.83	22.87	22.97
	16QAM	RB1#0	22.86	22.89	22.95
		RB1#13	22.85	23.09	22.76
		RB1#24	23.00	22.93	23.08
		RB15#0	21.82	21.80	21.82
		RB15#10	21.83	21.88	21.94
		RB25#0	21.83	21.80	21.94
10MHz	QPSK	RB1#0	23.87	23.96	23.90
		RB1#25	24.15	24.09	23.99
		RB1#49	24.07	24.06	24.02
		RB25#0	22.95	22.84	22.86
		RB25#25	22.98	23.02	23.01
		RB50#0	23.02	22.99	23.00
	16QAM	RB1#0	22.87	22.78	22.76
		RB1#25	23.14	22.97	22.96
		RB1#49	23.14	22.92	22.89
		RB25#0	21.86	21.88	21.84
		RB25#25	21.95	21.91	21.99
		RB50#0	21.98	21.92	21.91

PAR, Band 2

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	4.84	4.52	4.55	13
	100 RB		5.45	5.35	5.38	13
16QAM	1 RB	20 MHz	5.93	5.71	5.58	13
	100 RB		6.31	6.22	6.28	13

PAR, Band 4

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	5.19	4.84	5.32	13
	100 RB		5.58	5.38	5.51	13
16QAM	1 RB	20 MHz	5.93	5.87	6.31	13
	100 RB		6.38	6.35	6.47	13

PAR, Band 5

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	4.23	4.10	4.29	13
	50 RB		5.06	5.19	5.13	13
16QAM	1 RB	10 MHz	5.29	5.10	5.38	13
	50 RB		5.96	6.03	5.99	13

Note: peak-to-average ratio (PAR) <13 dB.

ERP & EIRP

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band V Middle Channel								
836.60	H	82.91	8.68	0.00	0.50	8.18	38.45	30.27
836.60	V	92.97	21.71	0.00	0.50	21.21	38.45	17.24
WCDMA Band II Middle Channel								
1880.00	H	87.55	12.77	11.14	1.56	22.35	33.00	10.65
1880.00	V	89.60	14.63	11.14	1.56	24.21	33.00	8.79

Note:

1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.

2) Absolute Level = Substituted Level - Cable loss + Antenna Gain

3) Margin = Limit-Absolute Level

LTE Band 2

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)	
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)				
1880.00	1.40	QPSK	H	86.15	11.37	11.14	1.56	20.95	33.00	12.05	
1880.00			V	89.47	14.50	11.14	1.56	24.08	33.00	8.92	
1880.00	3.00		H	86.05	11.27	11.14	1.56	20.85	33.00	12.15	
1880.00			V	87.92	12.95	11.14	1.56	22.53	33.00	10.47	
1880.00	5.00		H	85.81	11.03	11.14	1.56	20.61	33.00	12.39	
1880.00			V	87.61	12.64	11.14	1.56	22.22	33.00	10.78	
1880.00	10.00		H	85.10	10.32	11.14	1.56	19.90	33.00	13.10	
1880.00			V	87.04	12.07	11.14	1.56	21.65	33.00	11.35	
1880.00	15.00		H	84.70	9.92	11.14	1.56	19.50	33.00	13.50	
1880.00			V	87.86	12.89	11.14	1.56	22.47	33.00	10.53	
1880.00	20.00		H	87.39	12.61	11.14	1.56	22.19	33.00	10.81	
1880.00			V	88.54	13.57	11.14	1.56	23.15	33.00	9.85	
1880.00	1.40	16QAM	H	86.75	11.97	11.14	1.56	21.55	33.00	11.45	
1880.00			V	89.50	14.53	11.14	1.56	24.11	33.00	8.89	
1880.00	3.00		H	86.70	11.92	11.14	1.56	21.50	33.00	11.50	
1880.00			V	87.90	12.93	11.14	1.56	22.51	33.00	10.49	
1880.00	5.00		H	86.66	11.88	11.14	1.56	21.46	33.00	11.54	
1880.00			V	87.70	12.73	11.14	1.56	22.31	33.00	10.69	
1880.00	10.00		H	86.01	11.23	11.14	1.56	20.81	33.00	12.19	
1880.00			V	87.50	12.53	11.14	1.56	22.11	33.00	10.89	
1880.00	15.00		H	85.54	10.76	11.14	1.56	20.34	33.00	12.66	
1880.00			V	87.90	12.93	11.14	1.56	22.51	33.00	10.49	
1880.00	20.00		H	87.48	12.70	11.14	1.56	22.28	33.00	10.72	
1880.00			V	88.60	13.63	11.14	1.56	23.21	33.00	9.79	

LTE Band 4

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)	
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)				
1732.50	1.40	QPSK	H	87.24	12.03	10.70	1.52	21.21	30.00	8.79	
1732.50			V	89.40	13.89	10.70	1.52	23.07	30.00	6.93	
1732.50	3.00		H	85.94	10.73	10.70	1.52	19.91	30.00	10.09	
1732.50			V	88.71	13.20	10.70	1.52	22.38	30.00	7.62	
1732.50	5.00		H	84.21	9.00	10.70	1.52	18.18	30.00	11.82	
1732.50			V	88.54	13.03	10.70	1.52	22.21	30.00	7.79	
1732.50	10.00		H	82.15	6.94	10.70	1.52	16.12	30.00	13.88	
1732.50			V	88.80	13.29	10.70	1.52	22.47	30.00	7.53	
1732.50	15.00		H	84.25	9.04	10.70	1.52	18.22	30.00	11.78	
1732.50			V	88.64	13.13	10.70	1.52	22.31	30.00	7.69	
1732.50	20.00		H	85.82	10.61	10.70	1.52	19.79	30.00	10.21	
1732.50			V	89.10	13.59	10.70	1.52	22.77	30.00	7.23	
1732.50	16QAM	16QAM	H	87.91	12.70	10.70	1.52	21.88	30.00	8.12	
1732.50			V	90.83	15.32	10.70	1.52	24.50	30.00	5.50	
1732.50			H	85.52	10.31	10.70	1.52	19.49	30.00	10.51	
1732.50			V	89.90	14.39	10.70	1.52	23.57	30.00	6.43	
1732.50			H	83.30	8.09	10.70	1.52	17.27	30.00	12.73	
1732.50			V	89.66	14.15	10.70	1.52	23.33	30.00	6.67	
1732.50	10.00		H	82.30	7.09	10.70	1.52	16.27	30.00	13.73	
1732.50			V	88.85	13.34	10.70	1.52	22.52	30.00	7.48	
1732.50	15.00		H	84.71	9.50	10.70	1.52	18.68	30.00	11.32	
1732.50			V	88.72	13.21	10.70	1.52	22.39	30.00	7.61	
1732.50	20.00		H	85.91	10.70	10.70	1.52	19.88	30.00	10.12	
1732.50			V	89.52	14.01	10.70	1.52	23.19	30.00	6.81	

LTE Band 5

Frequency (MHz)	BW (MHz)	Modulation	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
					Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
836.50	1.40	QPSK	H	85.73	11.50	0.00	0.50	11.00	38.45	27.45
836.50			V	93.92	22.66	0.00	0.50	22.16	38.45	16.29
836.50			H	85.94	11.71	0.00	0.50	11.21	38.45	27.24
836.50			V	93.86	22.60	0.00	0.50	22.10	38.45	16.35
836.50			H	85.59	11.36	0.00	0.50	10.86	38.45	27.59
836.50			V	93.34	22.08	0.00	0.50	21.58	38.45	16.87
836.50			H	84.88	10.65	0.00	0.50	10.15	38.45	28.30
836.50			V	93.03	21.77	0.00	0.50	21.27	38.45	17.18
836.50	3.00	16QAM	H	85.64	11.41	0.00	0.50	10.91	38.45	27.54
836.50			V	93.73	22.47	0.00	0.50	21.97	38.45	16.48
836.50			H	84.95	10.72	0.00	0.50	10.22	38.45	28.23
836.50			V	93.79	22.53	0.00	0.50	22.03	38.45	16.42
836.50			H	85.32	11.09	0.00	0.50	10.59	38.45	27.86
836.50			V	93.34	22.08	0.00	0.50	21.58	38.45	16.87
836.50			H	84.66	10.43	0.00	0.50	9.93	38.45	28.52
836.50			V	93.85	22.59	0.00	0.50	22.09	38.45	16.36

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH

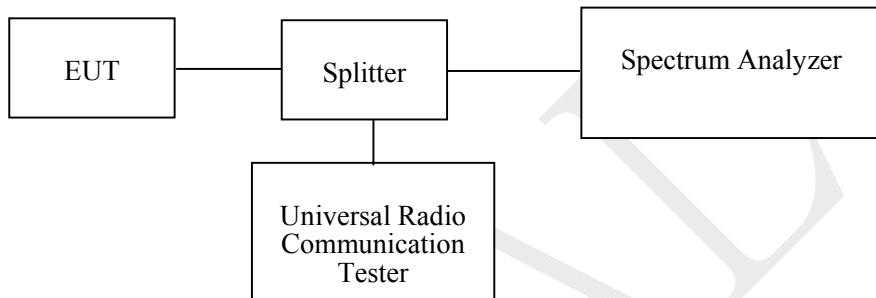
Applicable Standard

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05
R&S	Universal Radio Communication Tester	CMU200	106 891	2018/12/14	2019/12/14
E-Microwave	Two-way Spliter	ODP-1-6-2S	OE0120142	Each Time	/
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.1~27.2°C
Relative Humidity:	61~64 %
ATM Pressure:	100.2~100.8 kPa

The testing was performed by Elena Lei from 2019-04-23 to 2019-04-29.

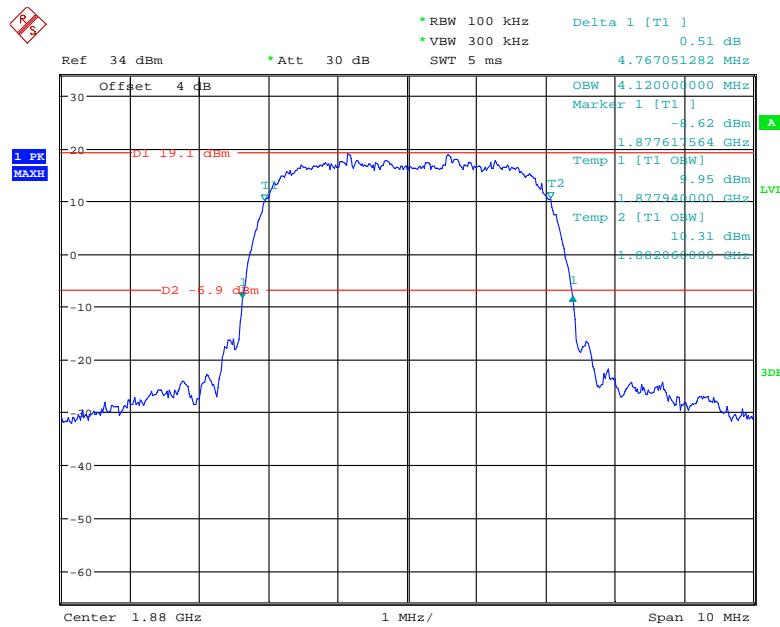
Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
WCDMA Band II	M	Rel 99	4.120	4.767
		HSDPA	4.140	4.751
		HSUPA	4.160	4.785
		Rel 99	4.140	4.776
		HSDPA	4.140	4.756
		HSUPA	4.160	4.748

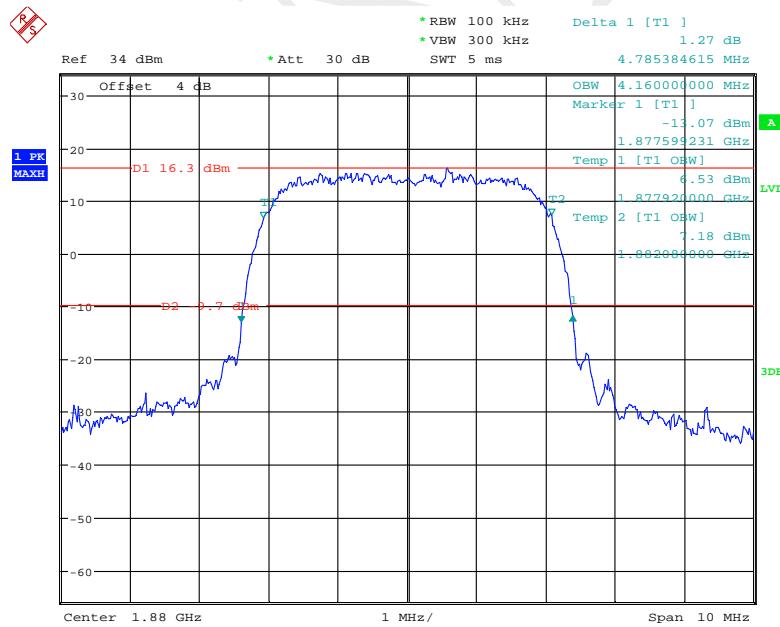
Band	Bandwidth	Modulation	99% occupied bandwidth (MHz)	26 dB bandwidth (MHz)
LTE Band 2	1.4 MHz	QPSK	1.110	1.317
		16QAM	1.104	1.305
	3 MHz	QPSK	2.688	2.934
		16QAM	2.688	2.934
	5 MHz	QPSK	4.520	4.990
		16QAM	4.520	5.030
	10 MHz	QPSK	8.960	9.619
		16QAM	8.960	9.699
	15 MHz	QPSK	13.500	14.790
		16QAM	13.500	14.790
	20 MHz	QPSK	17.920	19.399
		16QAM	17.920	19.238
LTE Band 4	1.4 MHz	QPSK	1.110	1.317
		16QAM	1.110	1.299
	3 MHz	QPSK	2.700	2.958
		16QAM	2.700	2.934
	5 MHz	QPSK	4.540	4.970
		16QAM	4.520	4.990
	10 MHz	QPSK	8.960	9.699
		16QAM	8.960	9.619
	15 MHz	QPSK	13.500	14.729
		16QAM	13.440	14.729
	20 MHz	QPSK	17.920	19.158
		16QAM	17.920	19.319
LTE Band 5	1.4 MHz	QPSK	1.104	1.299
		16QAM	1.110	1.305
	3 MHz	QPSK	2.688	2.934
		16QAM	2.700	2.946
	5 MHz	QPSK	4.520	4.970
		16QAM	4.520	4.990
	10 MHz	QPSK	8.960	9.739
		16QAM	8.960	9.739

WCDMA Band II, Rel 99



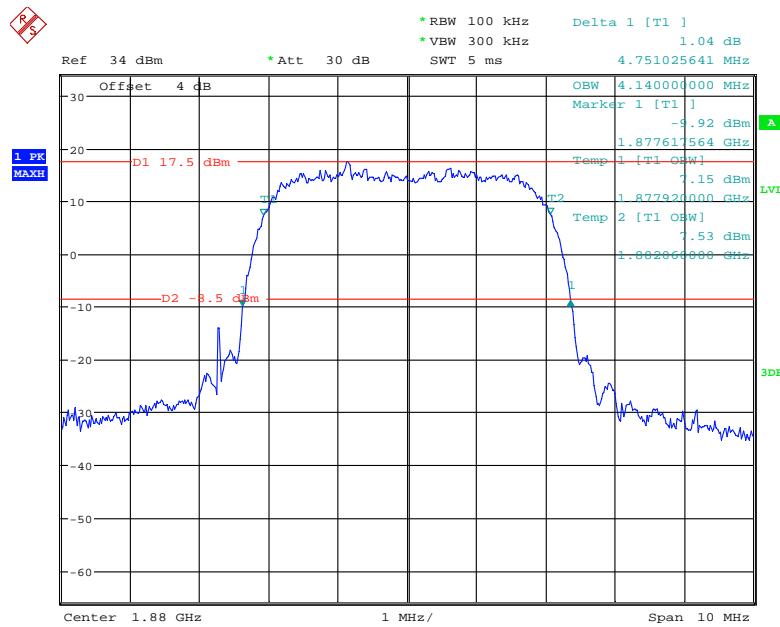
Date: 29.APR.2019 08:58:14

WCDMA Band II, HSUPA



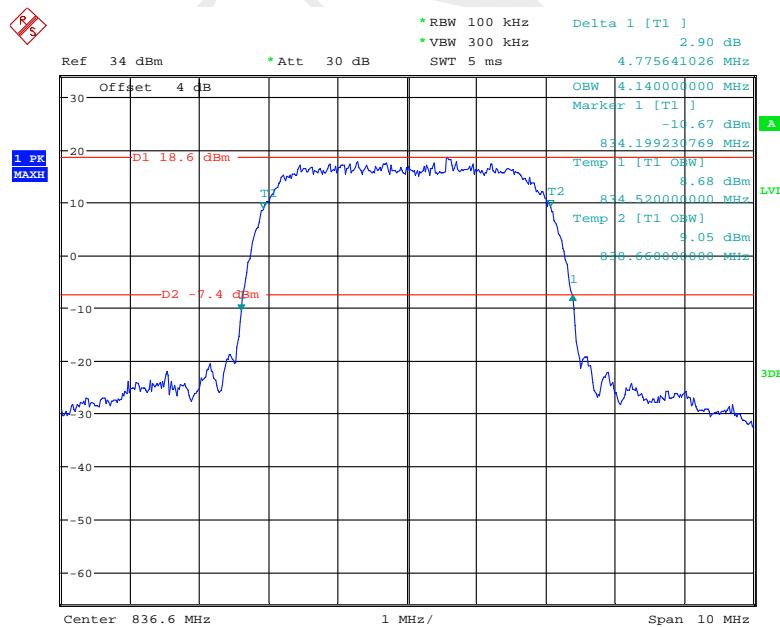
Date: 29.APR.2019 08:59:51

WCDMA Band II, HSDPA

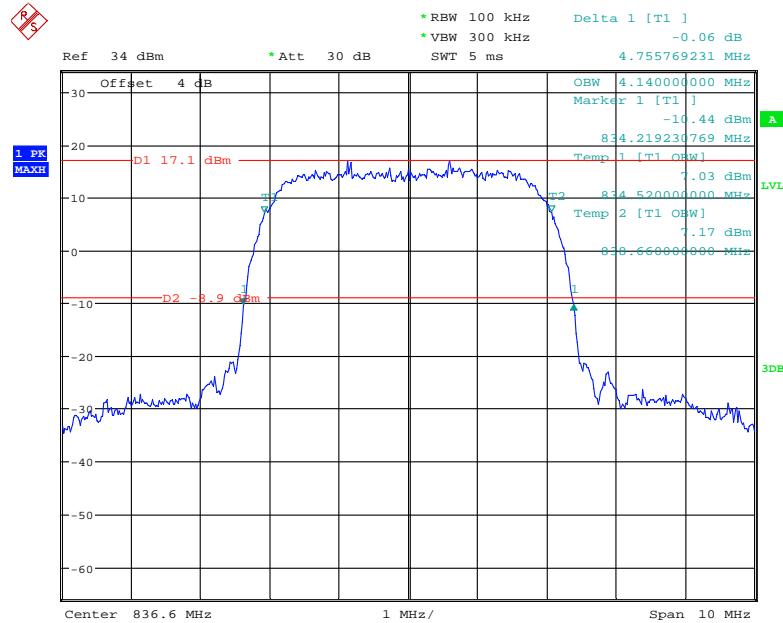


Date: 29.APR.2019 08:49:10

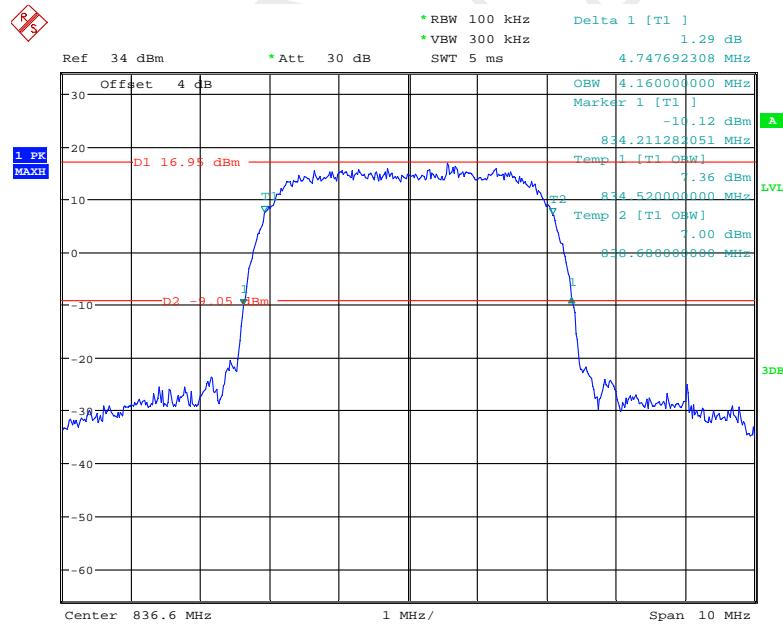
WCDMA Band V, Rel 99



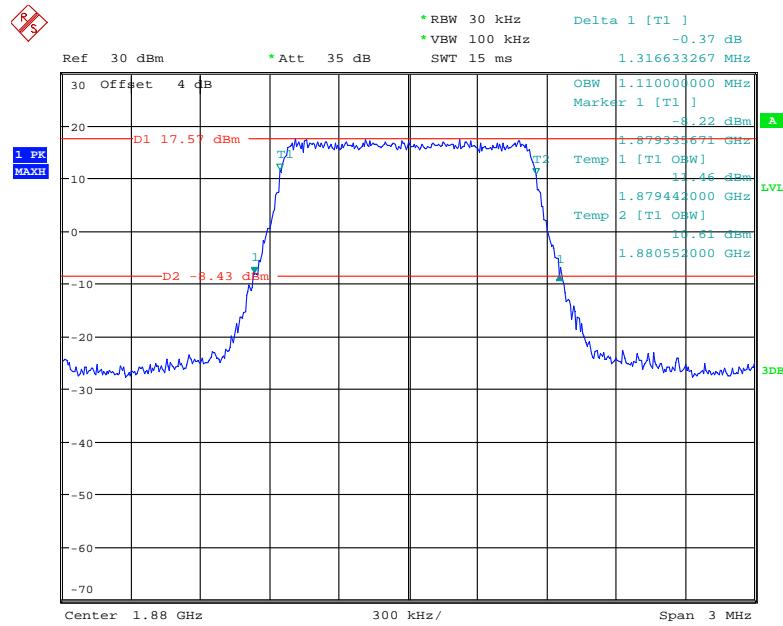
Date: 29.APR.2019 08:44:42

WCDMA Band V, HSDPA

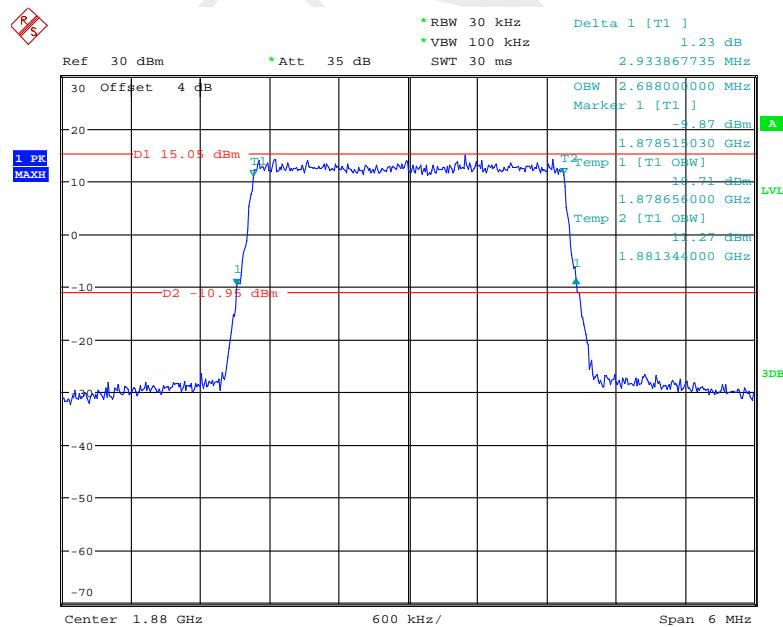
Date: 29.APR.2019 09:55:26

WCDMA Band V, HSUPA

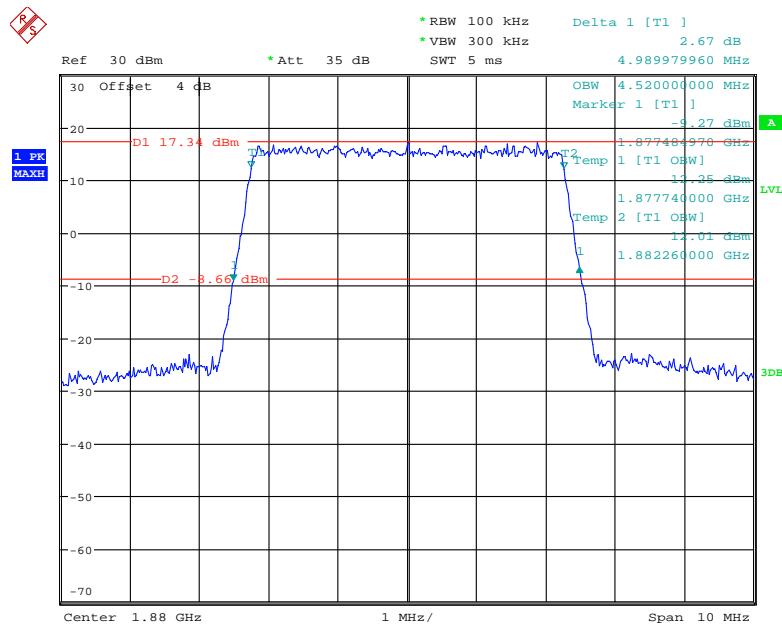
Date: 29.APR.2019 09:57:56

LTE Band 2**QPSK_1.4 MHz**

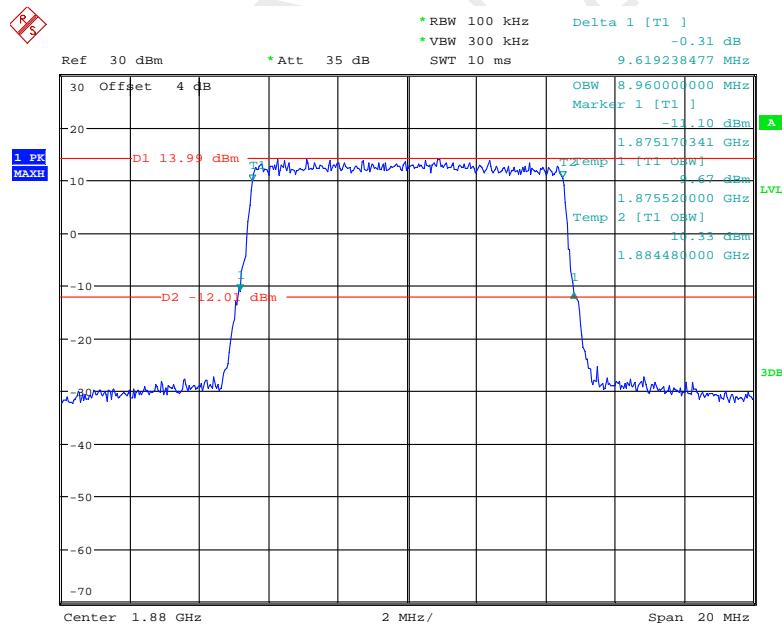
Date: 23.APR.2019 16:26:01

QPSK_3 MHz

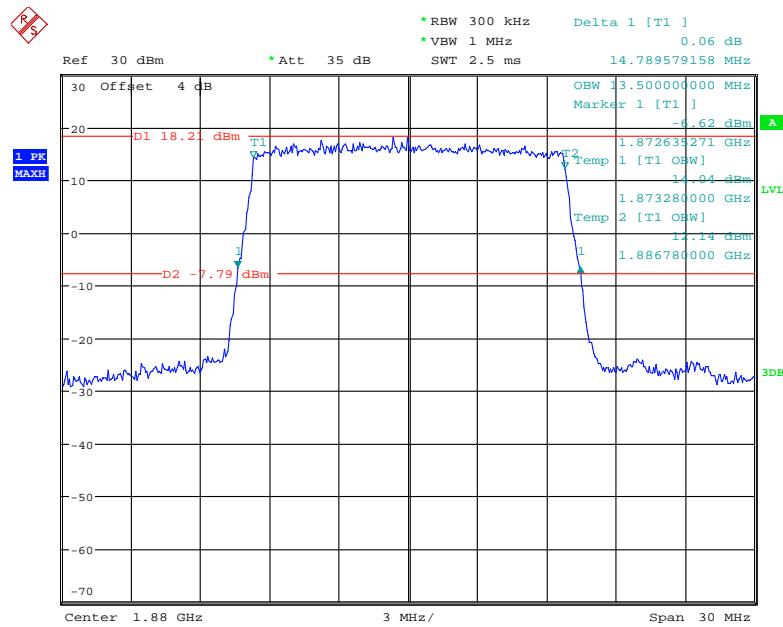
Date: 23.APR.2019 16:27:25

QPSK_5 MHz

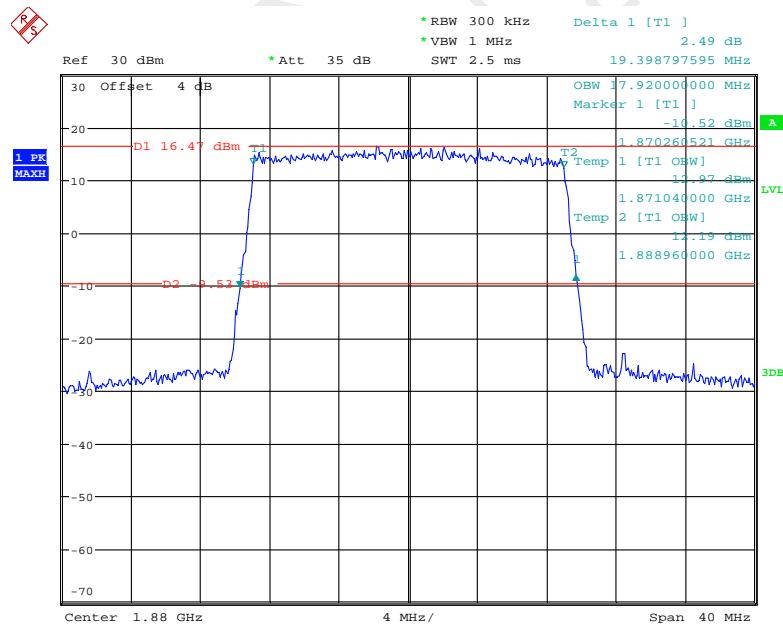
Date: 23.APR.2019 16:29:07

QPSK_10 MHz

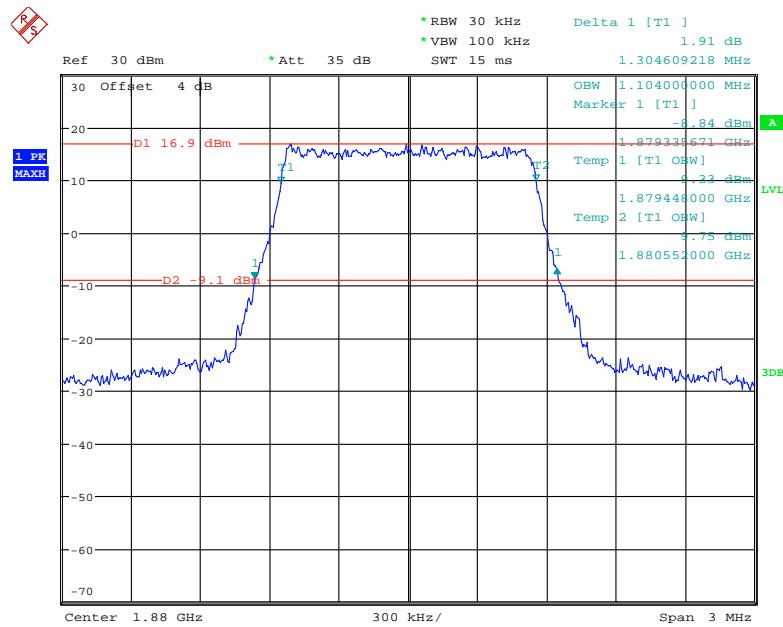
Date: 23.APR.2019 16:30:31

QPSK_15 MHz

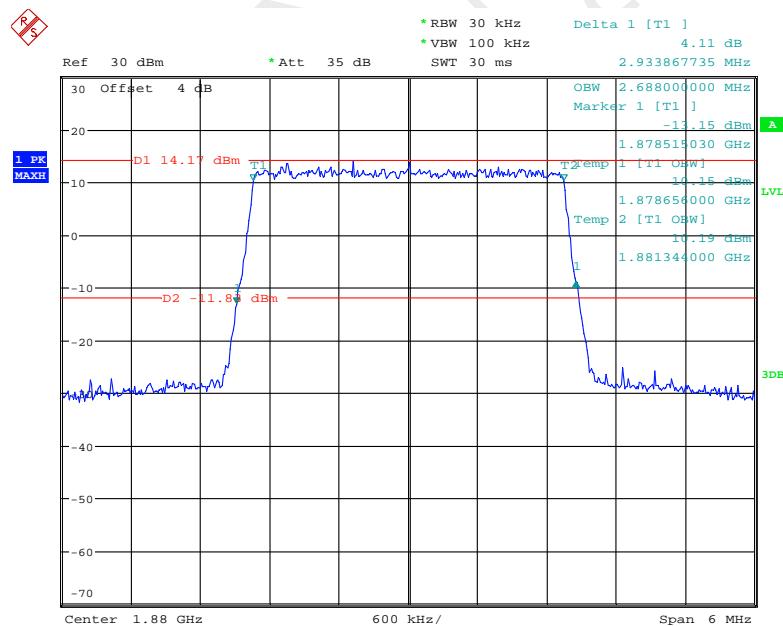
Date: 23.APR.2019 16:32:07

QPSK_20 MHz

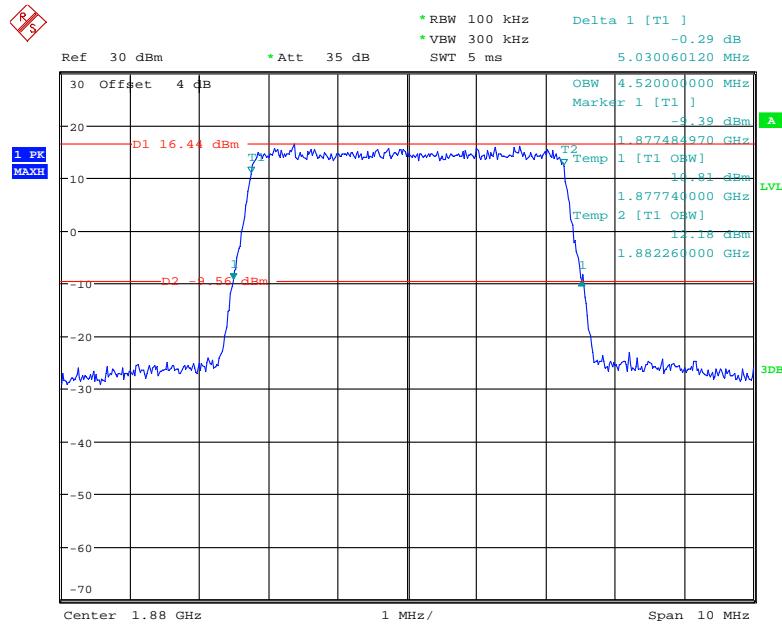
Date: 23.APR.2019 16:33:38

16QAM_1.4 MHz

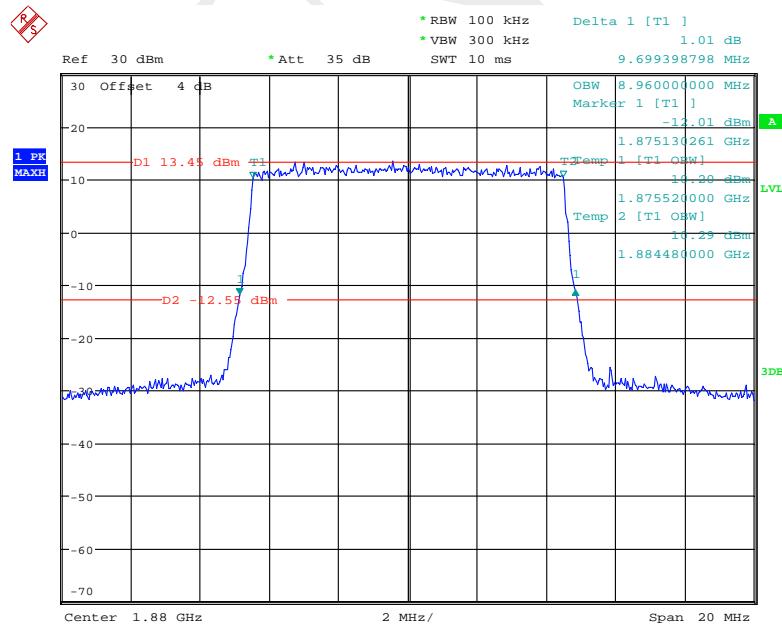
Date: 23.APR.2019 16:26:43

16QAM_3 MHz

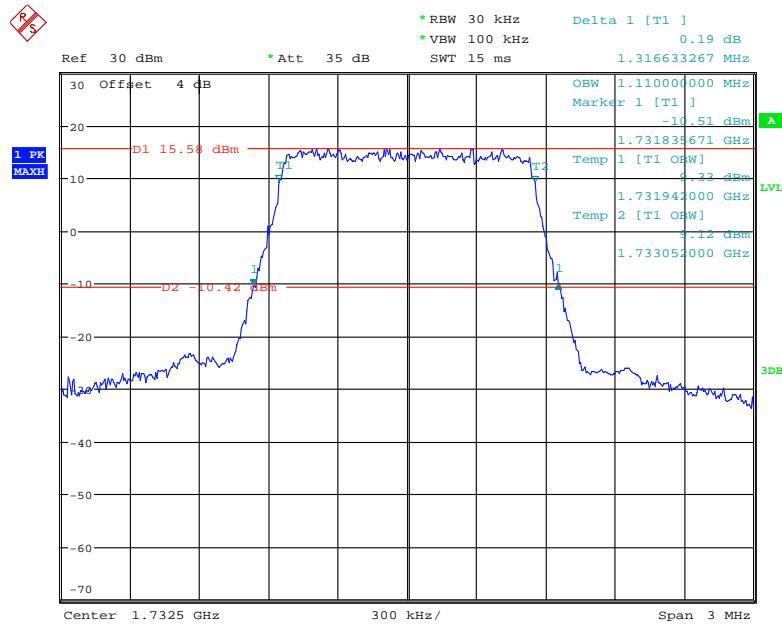
Date: 23.APR.2019 16:28:11

16QAM_5 MHz

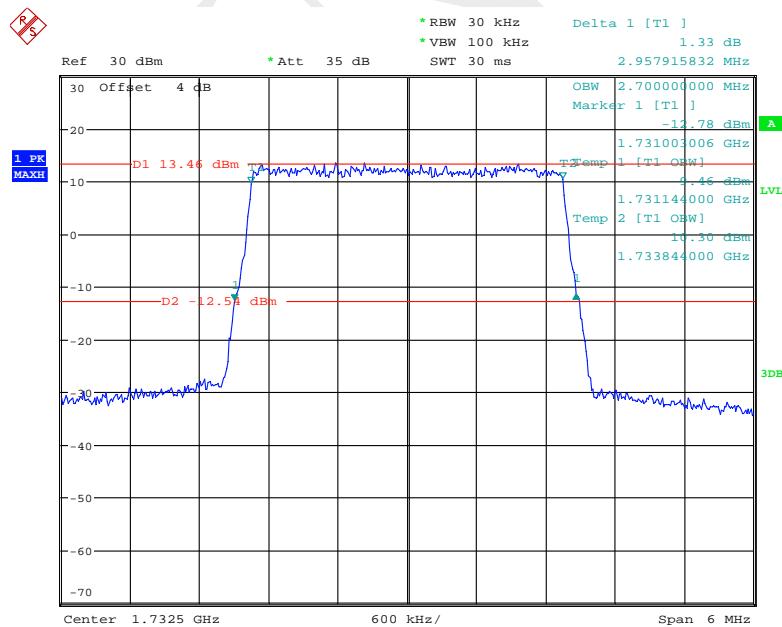
Date: 23.APR.2019 16:29:53

16QAM_10 MHz

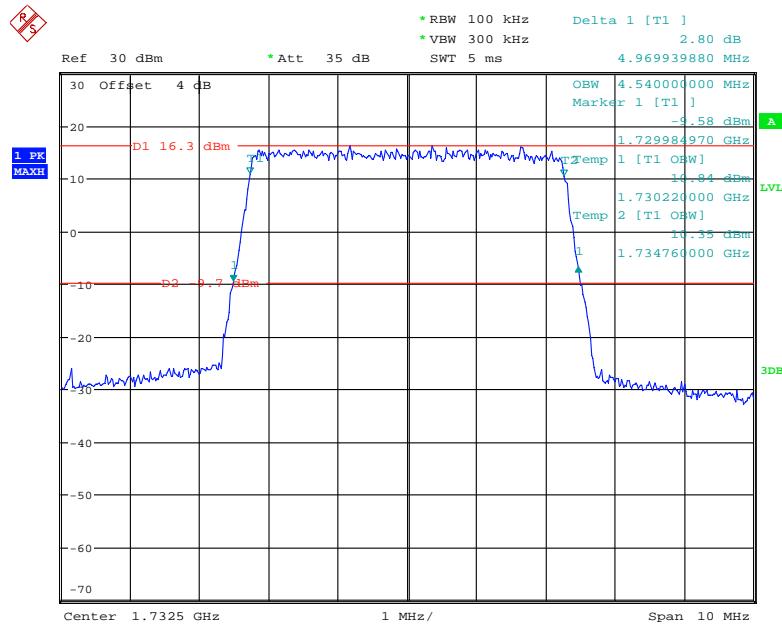
Date: 23.APR.2019 16:31:22

LTE Band 4**QPSK_1.4 MHz**

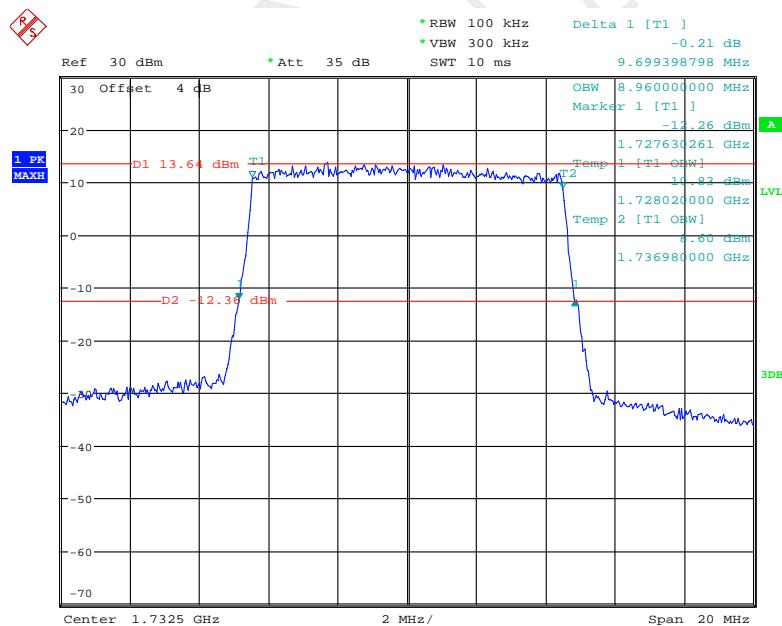
Date: 23.APR.2019 16:35:14

QPSK_3 MHz

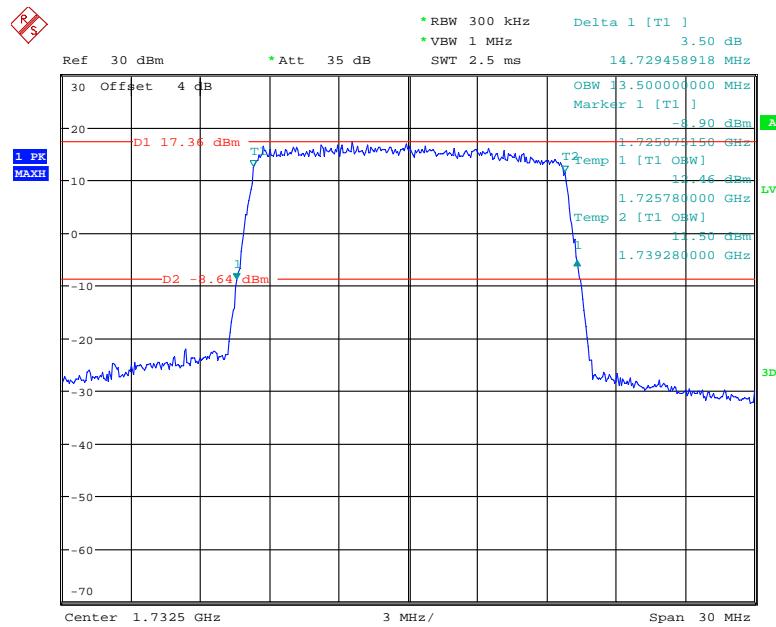
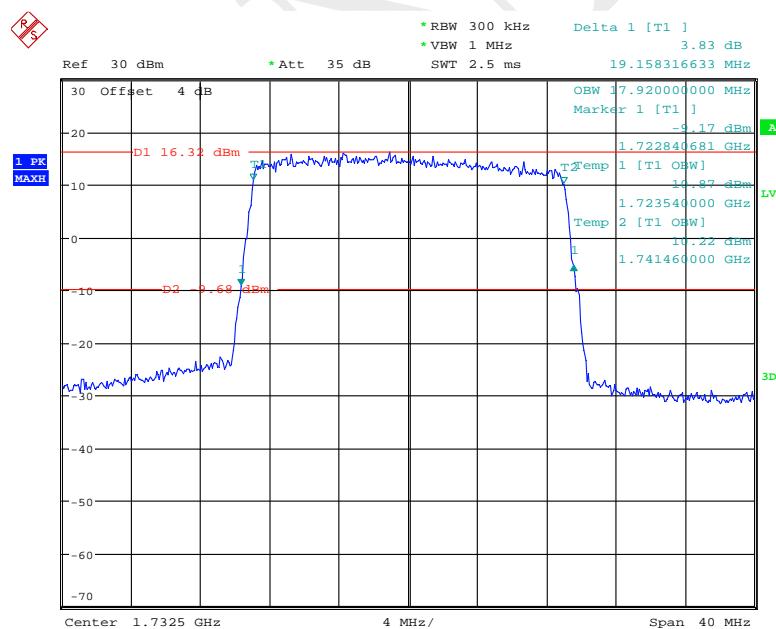
Date: 23.APR.2019 16:36:52

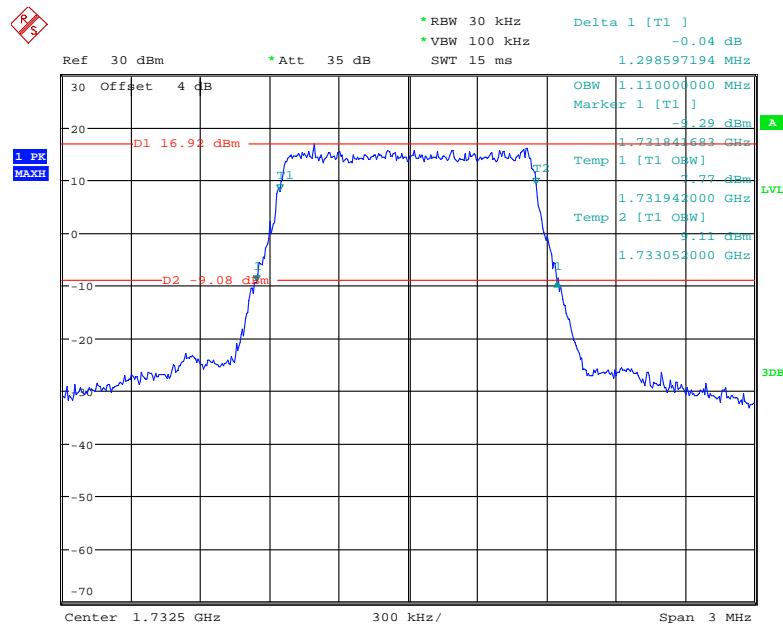
QPSK_5 MHz

Date: 23.APR.2019 16:38:16

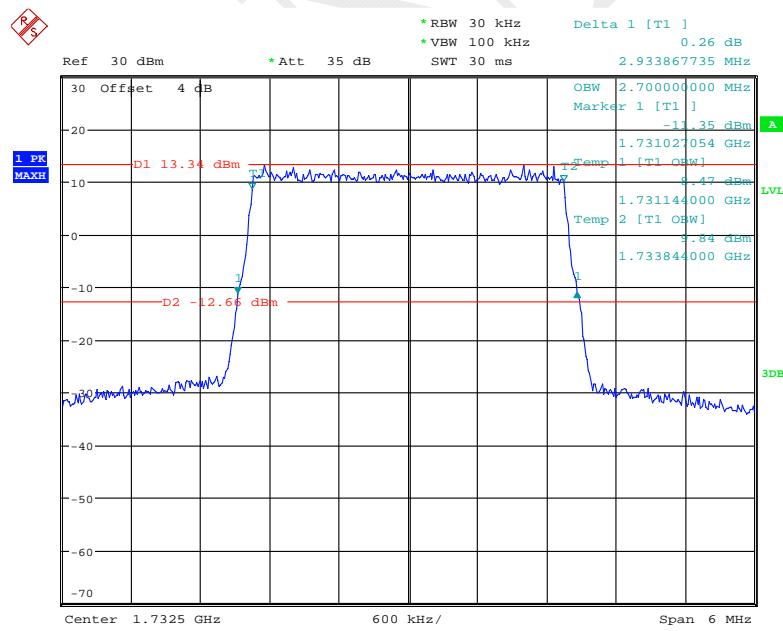
QPSK_10 MHz

Date: 23.APR.2019 16:39:33

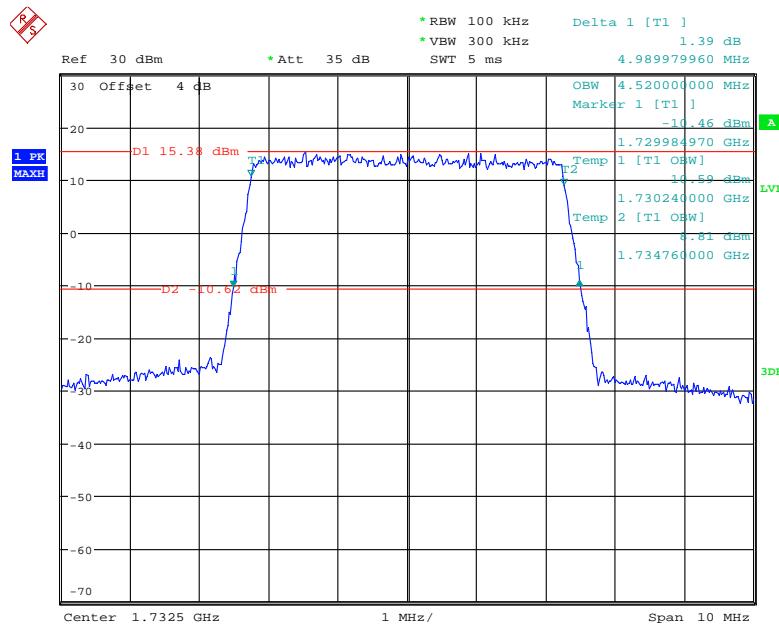
QPSK_15 MHz**QPSK_20 MHz**

16QAM_1.4 MHz

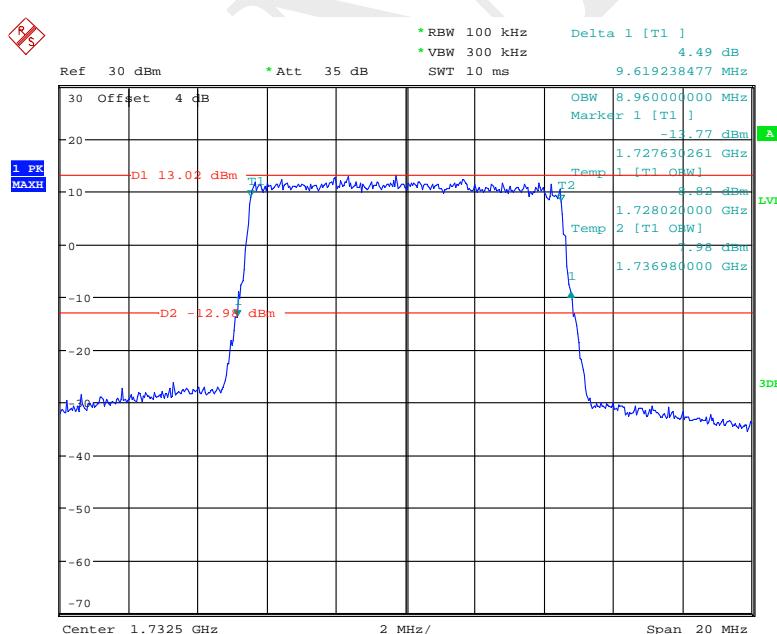
Date: 23.APR.2019 16:36:04

16QAM_3 MHz

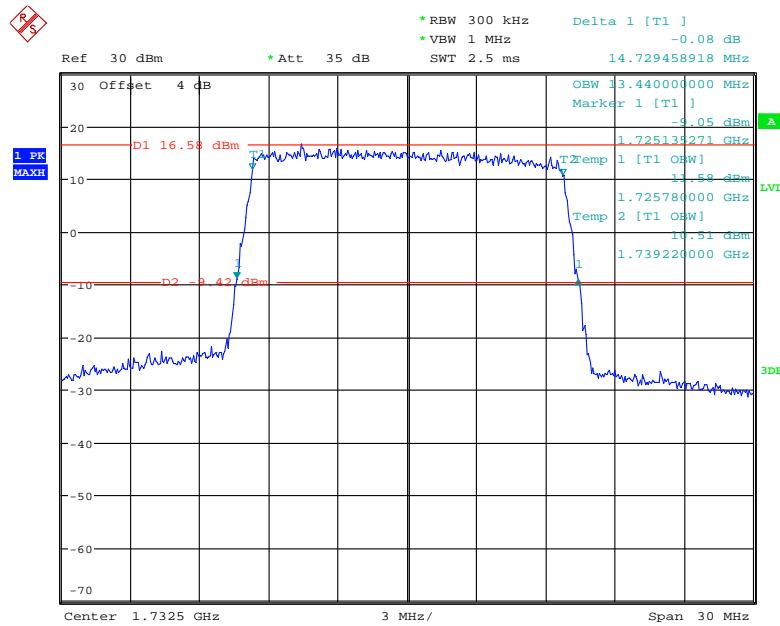
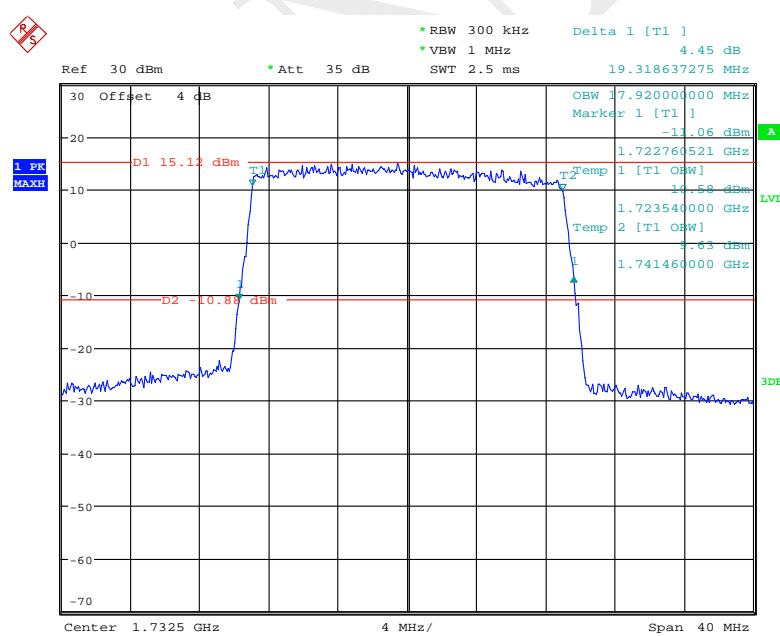
Date: 23.APR.2019 16:37:34

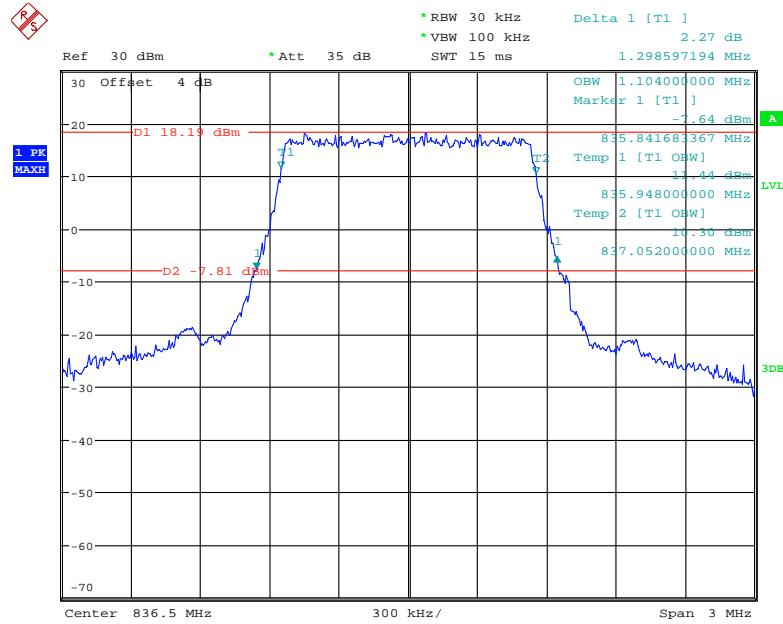
16QAM_5 MHz

Date: 23.APR.2019 16:38:47

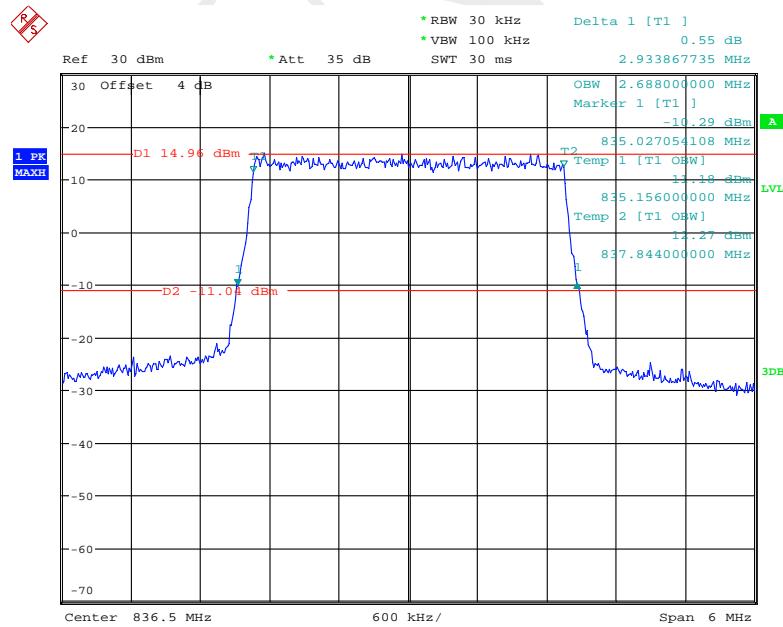
16QAM_10MHz

Date: 23.APR.2019 16:40:17

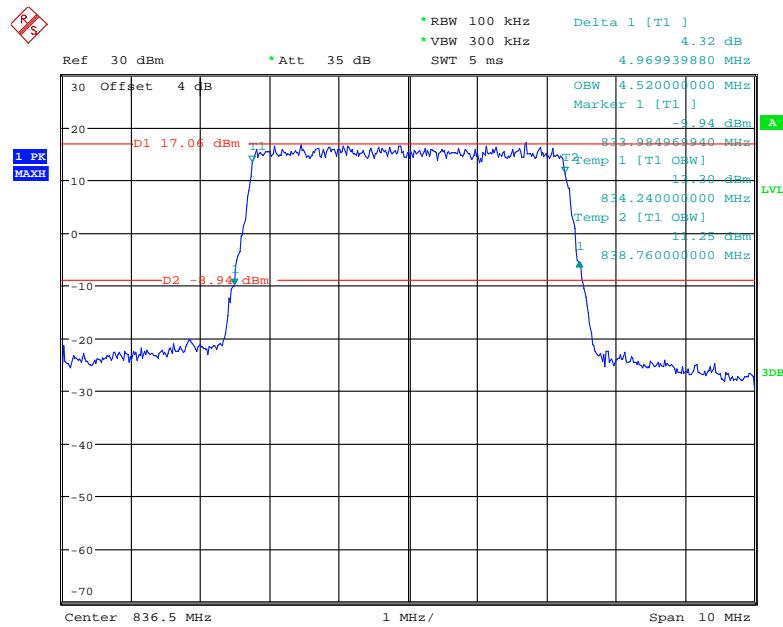
16QAM_15MHz**16QAM_20MHz**

LTE Band 5:**QPSK_1.4 MHz**

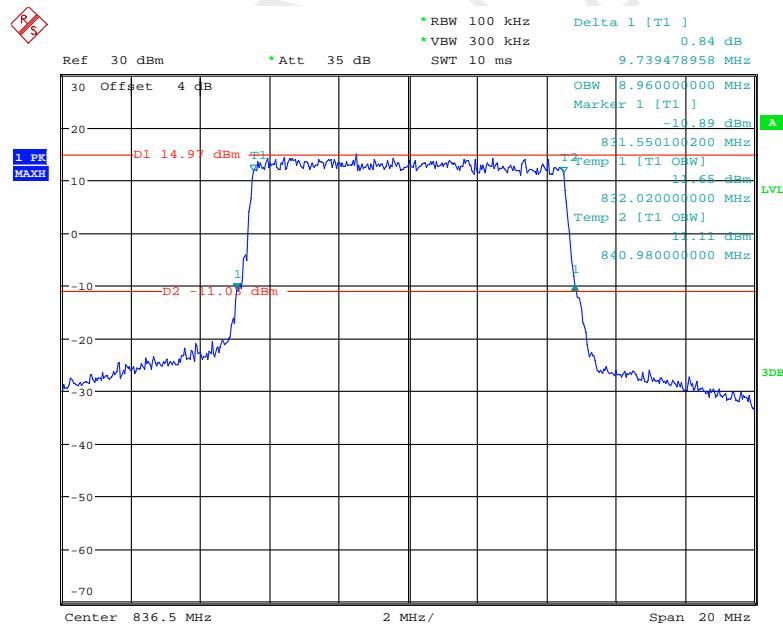
Date: 23.APR.2019 16:44:11

QPSK_3 MHz

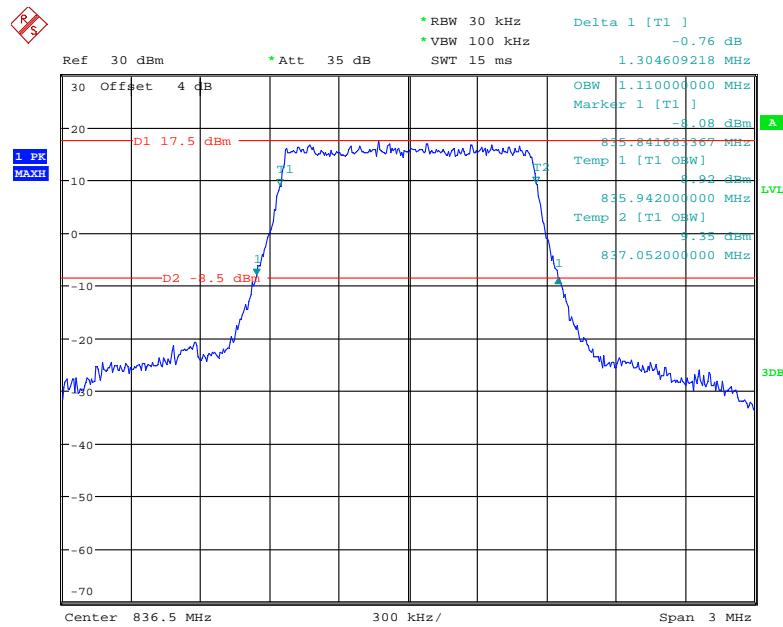
Date: 23.APR.2019 16:45:41

QPSK_5 MHz

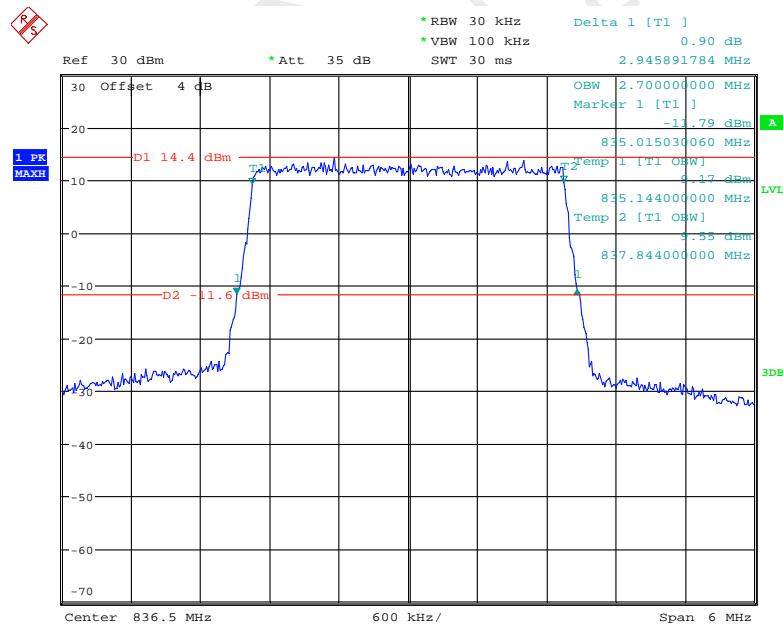
Date: 23.APR.2019 16:47:11

QPSK_10 MHz

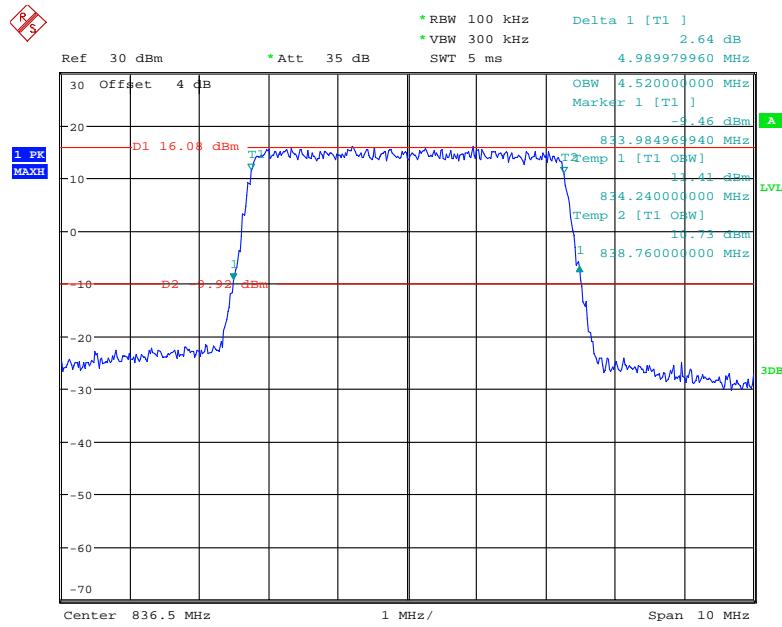
Date: 23.APR.2019 16:48:54

16QAM_1.4 MHz

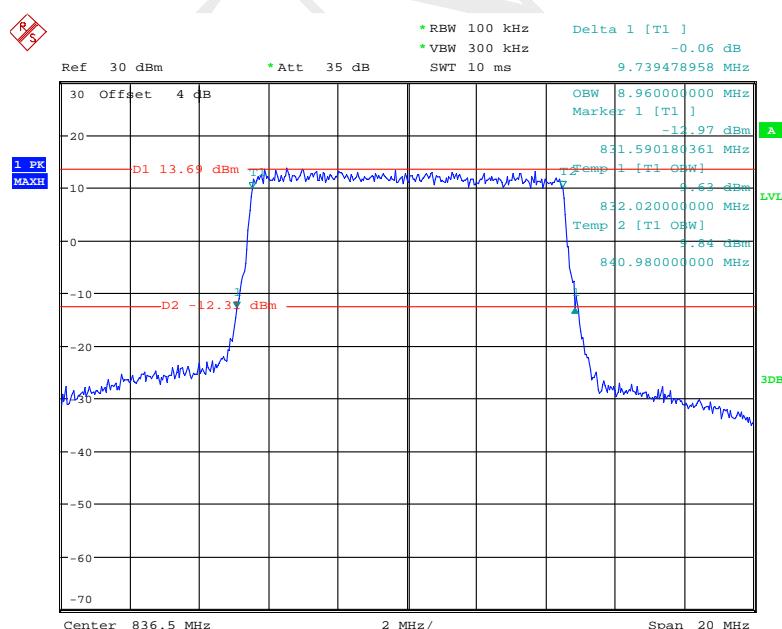
Date: 23.APR.2019 16:44:56

16QAM_3 MHz

Date: 23.APR.2019 16:46:27

16QAM_5 MHz

Date: 23.APR.2019 16:48:01

16QAM_10 MHz

Date: 23.APR.2019 16:49:44

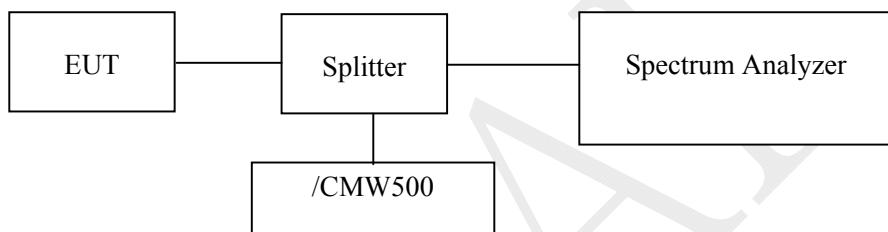
FCC §2.1051, §22.917(a) & §24.238(a) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS**Applicable Standard**

FCC §2.1051, §22.917(a), §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05
R&S	Universal Radio Communication Tester	CMU200	106 891	2018/12/14	2019/12/14
E-Microwave	Two-way Spliter	ODP-1-6-2S	OE0120142	Each Time	/
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

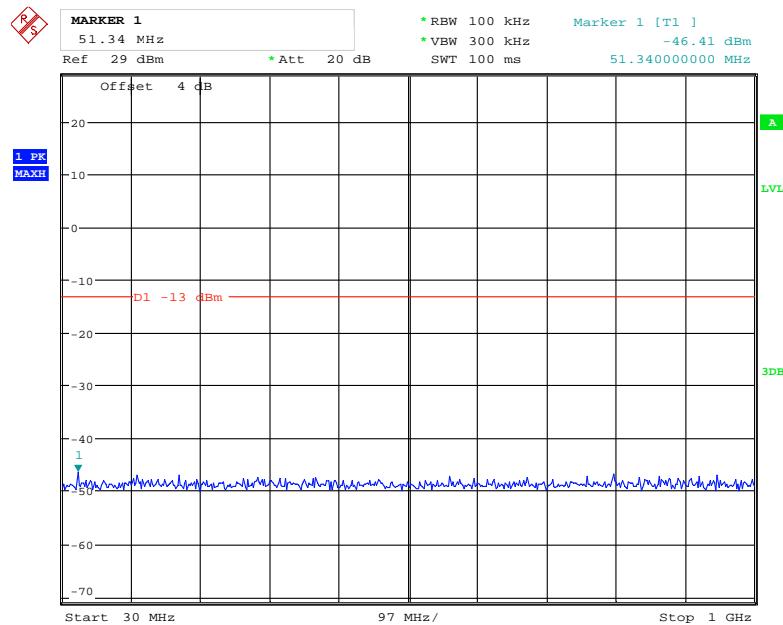
Environmental Conditions

Temperature:	24.1~27.2°C
Relative Humidity:	61~64 %
ATM Pressure:	100.2~100.8 kPa

The testing was performed by Elena Lei on 2019-04-22~2019-04-29.

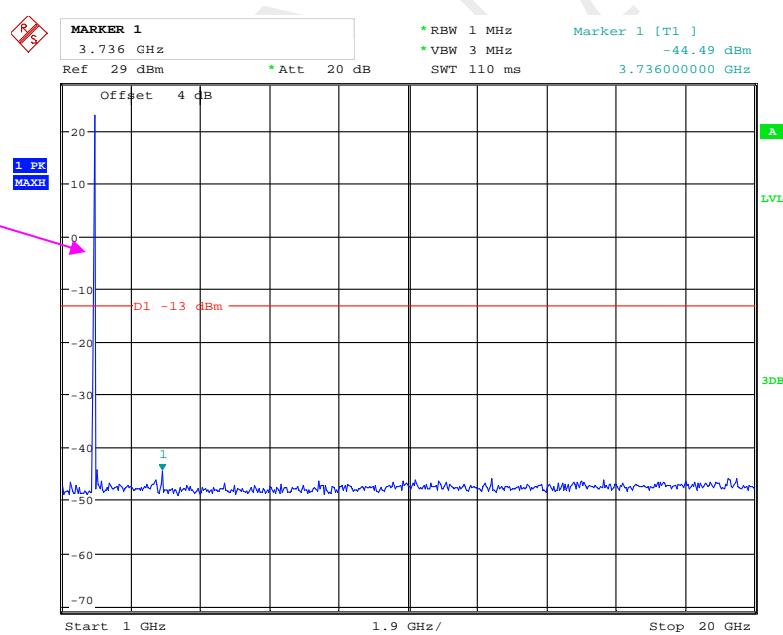
Test mode: Transmitting (Middle Channel)

Test Result: Compliance, Please refer to the following plots.

WCDMA Band II, Rel99

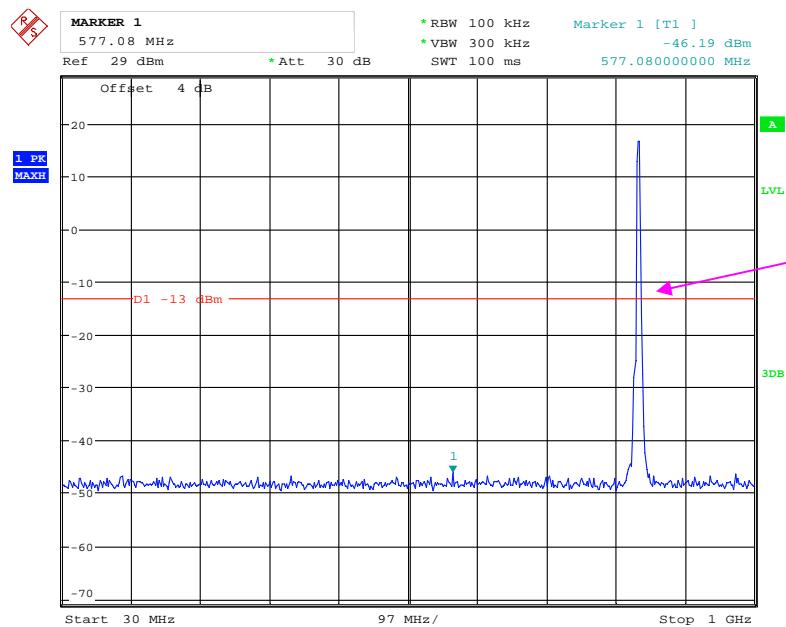
Date: 29.APR.2019 08:41:01

Fundamental

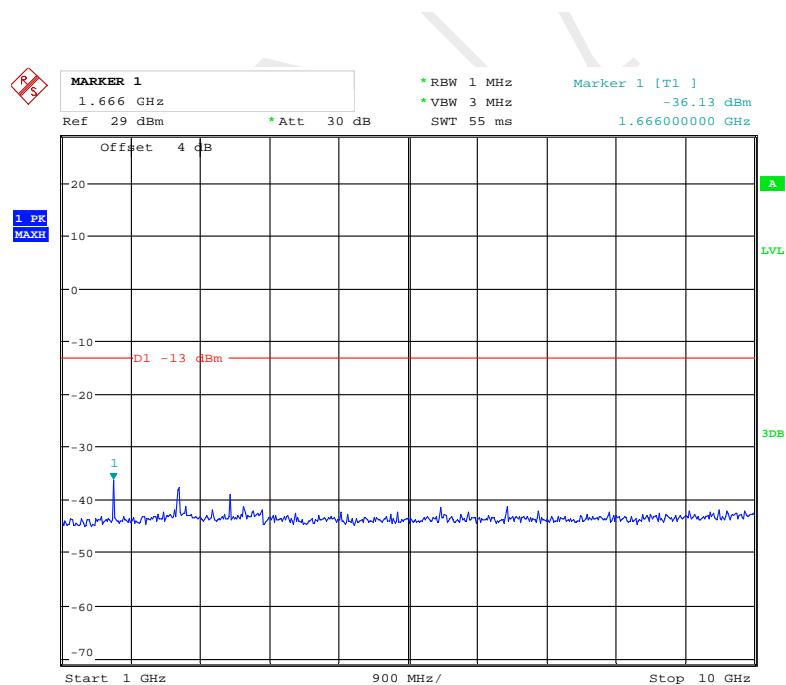


Date: 29.APR.2019 08:41:24

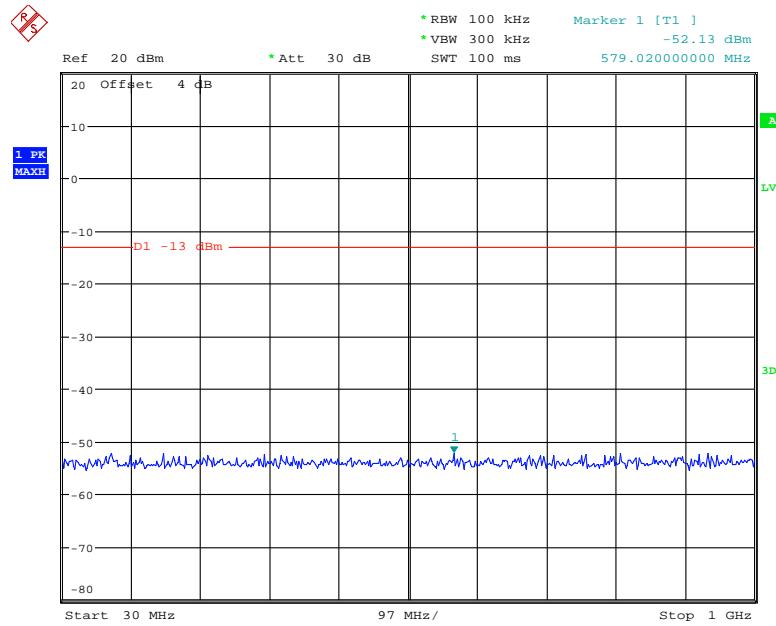
WCDMA Band V, Rel99



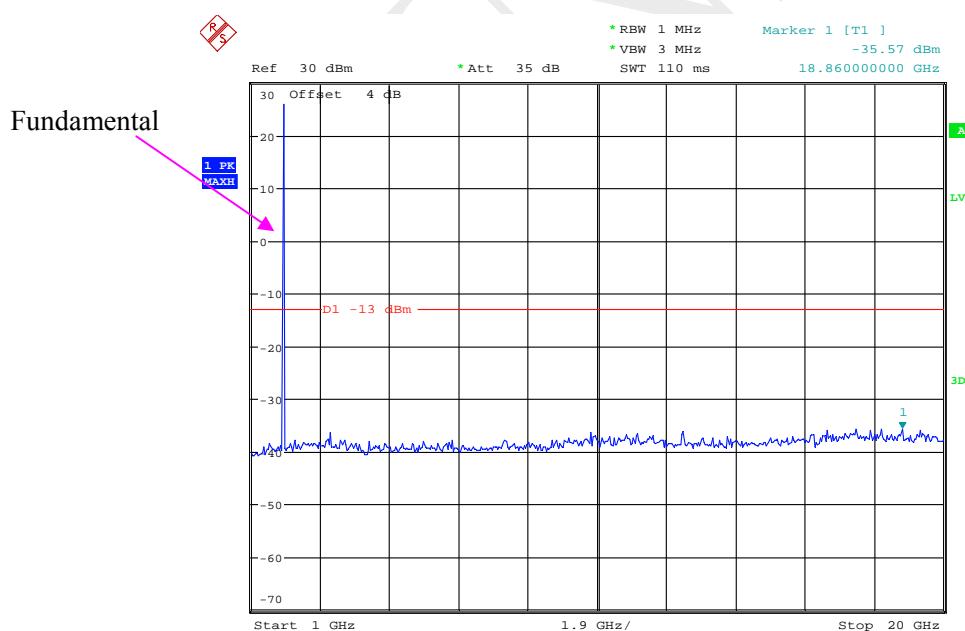
Date: 29.APR.2019 08:42:42



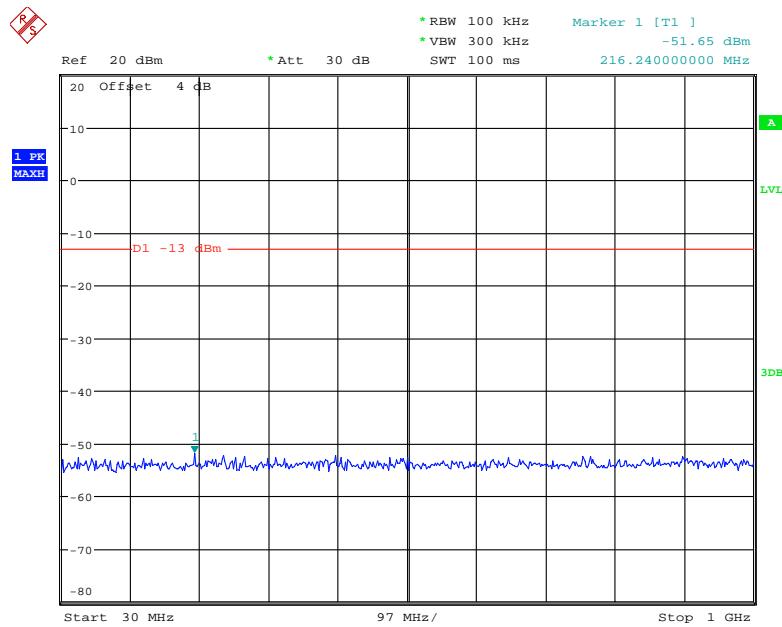
Date: 29.APR.2019 08:42:13

LTE Band 2 (Middle Channel)**QPSK_1.4 MHz**

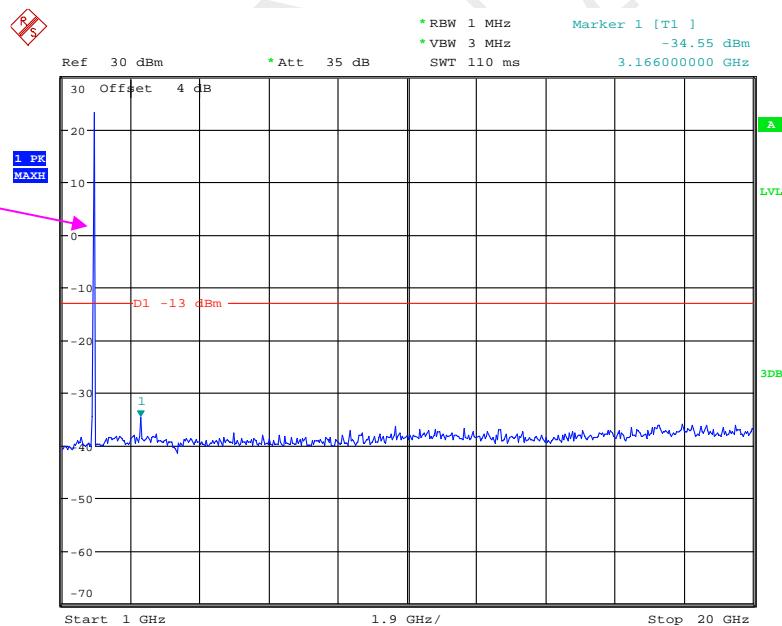
Date: 23.APR.2019 16:51:43



Date: 23.APR.2019 16:51:58

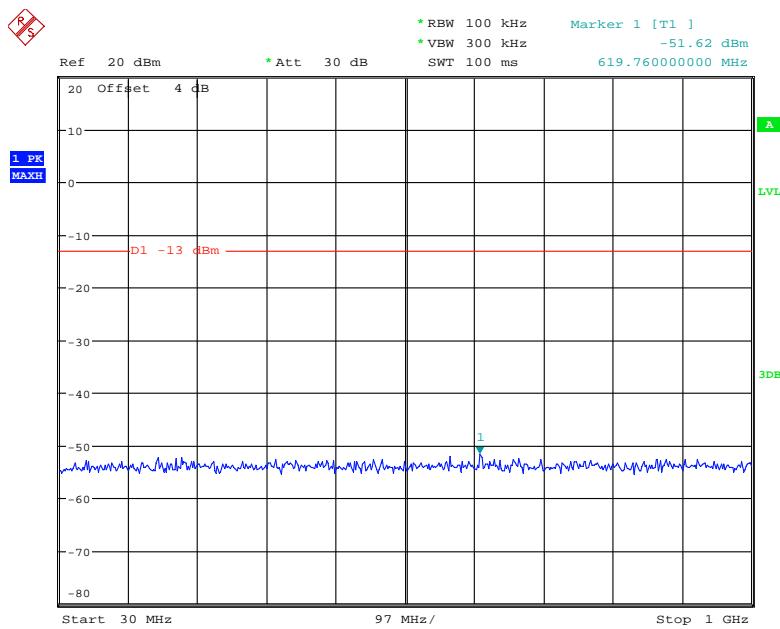
QPSK_3 MHz

Date: 23.APR.2019 16:52:19



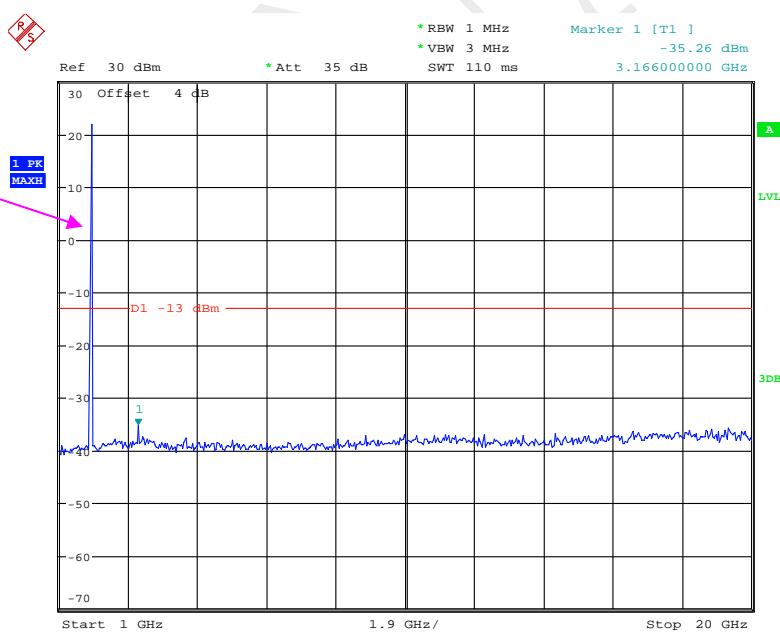
Fundamental

Date: 23.APR.2019 16:52:30

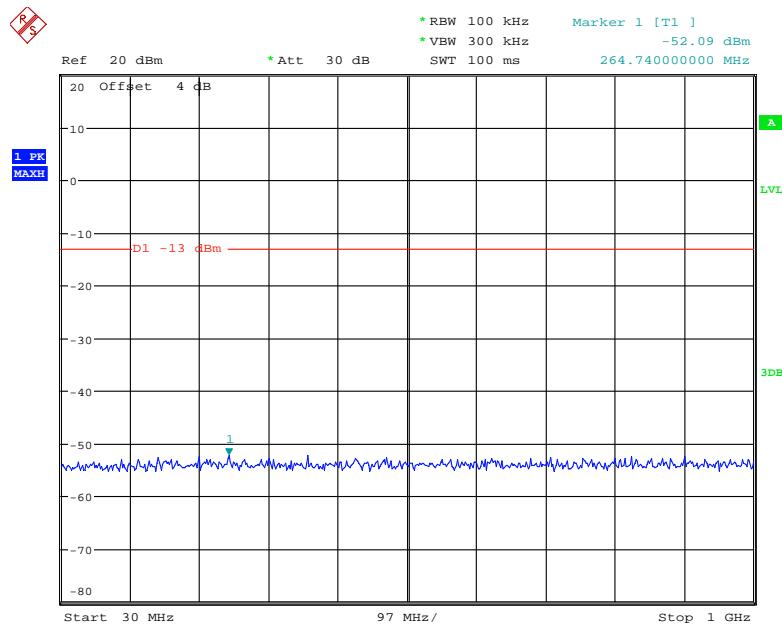
QPSK_5 MHz

Date: 23.APR.2019 16:52:51

Fundamental

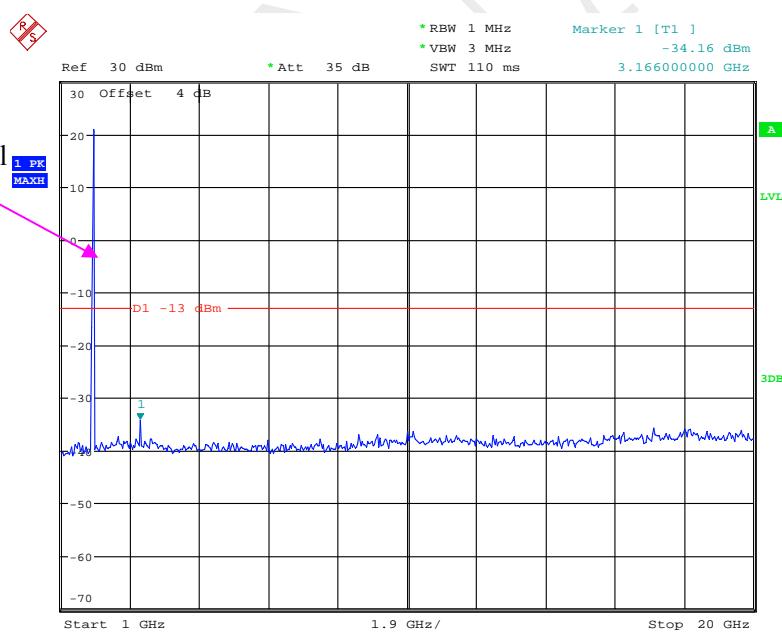


Date: 23.APR.2019 16:53:06

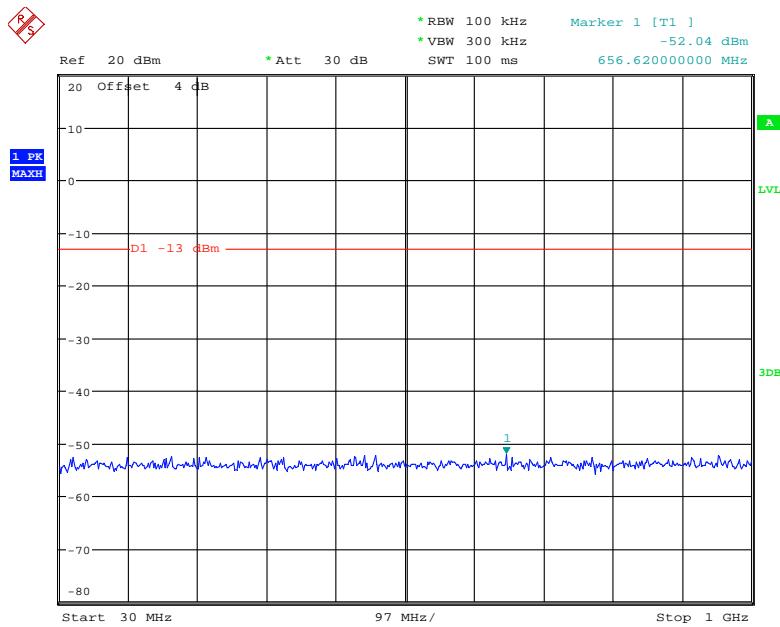
QPSK_10 MHz

Date: 23.APR.2019 16:53:28

Fundamental

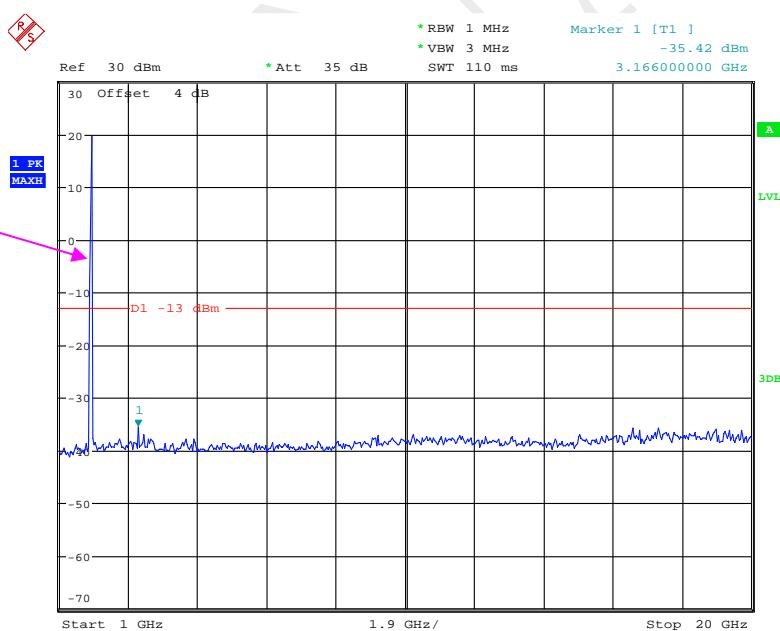


Date: 23.APR.2019 16:53:39

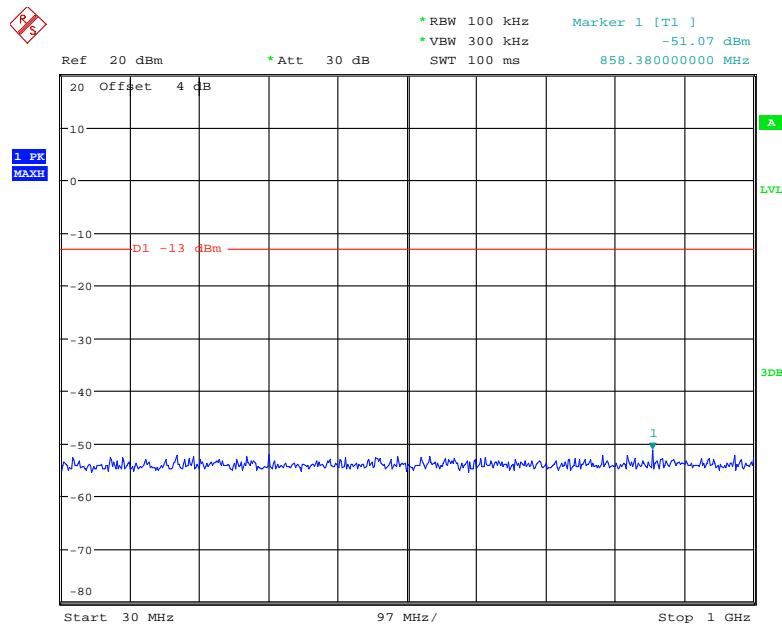
QPSK_15 MHz

Date: 23.APR.2019 16:54:04

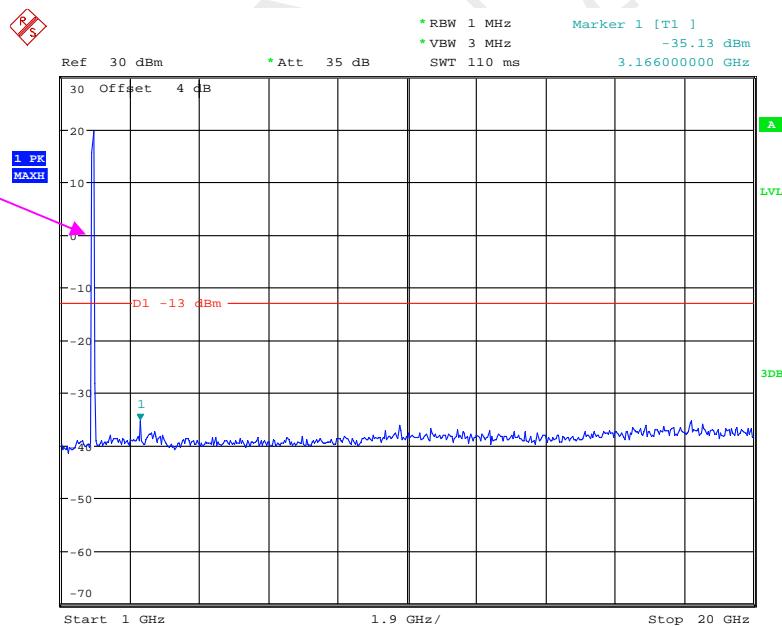
Fundamental



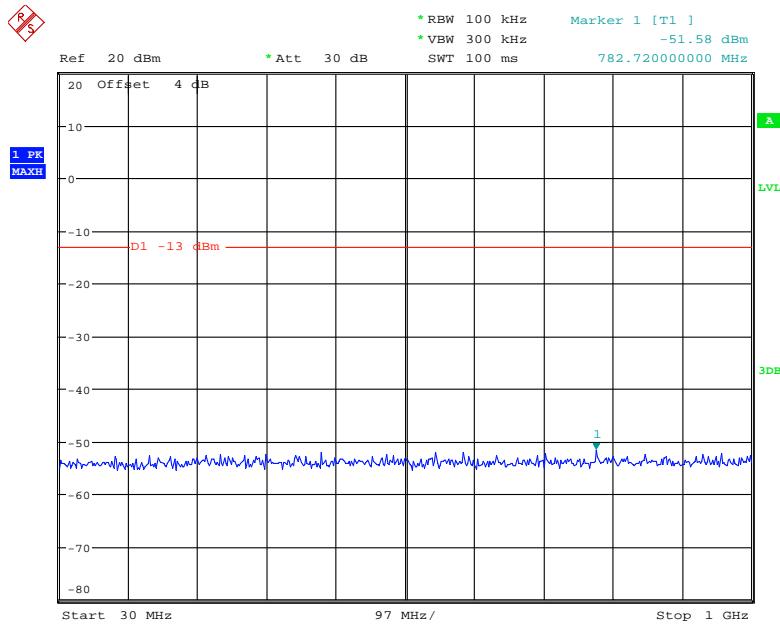
Date: 23.APR.2019 16:54:15

QPSK_20 MHz

Date: 23.APR.2019 16:54:40

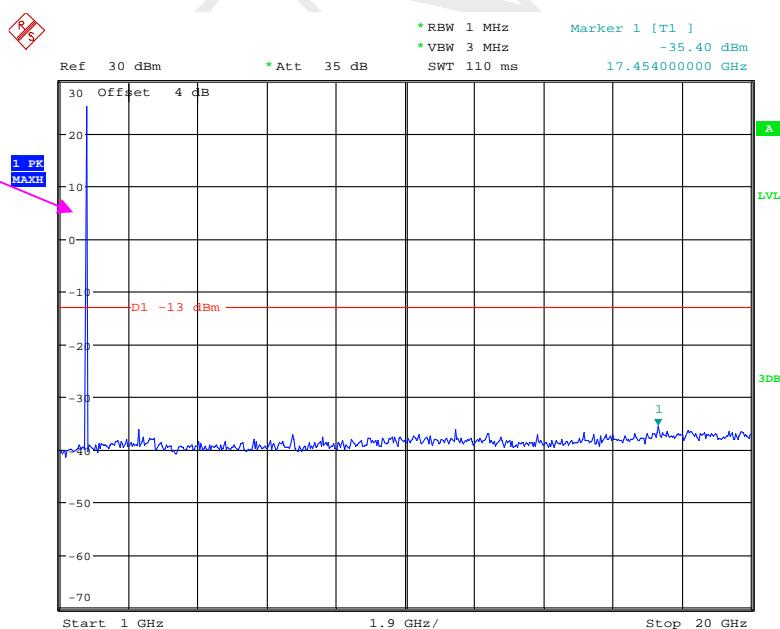


Date: 23.APR.2019 16:54:51

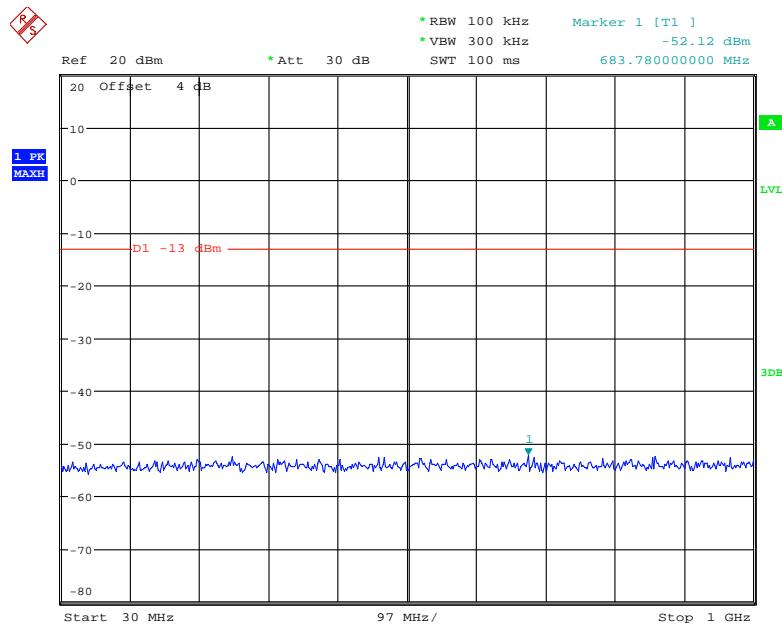
LTE Band 4**QPSK_1.4 MHz**

Date: 23.APR.2019 16:55:13

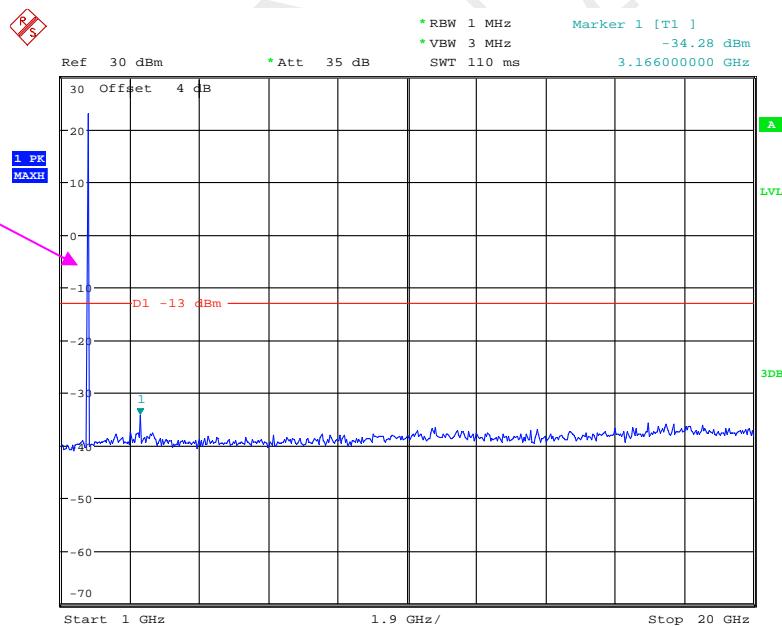
Fundamental



Date: 23.APR.2019 16:55:23

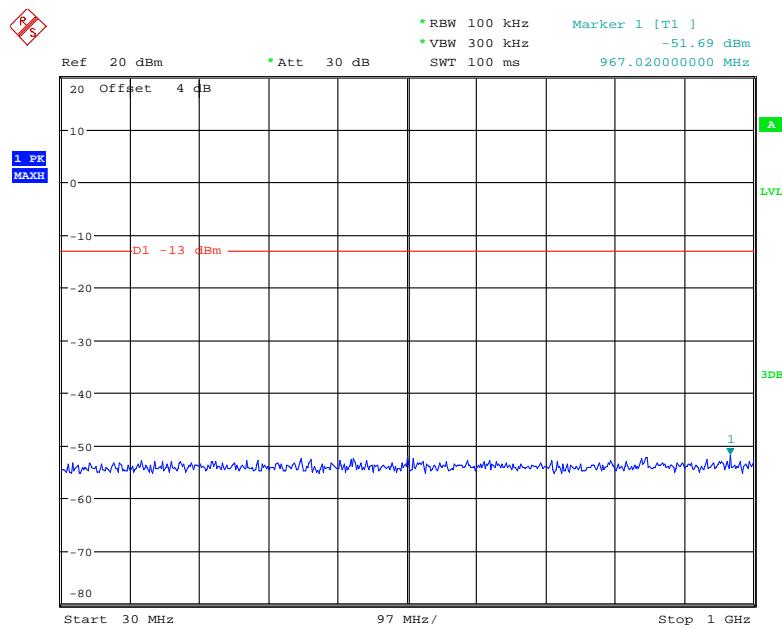
QPSK_3 MHz

Date: 23.APR.2019 16:55:41

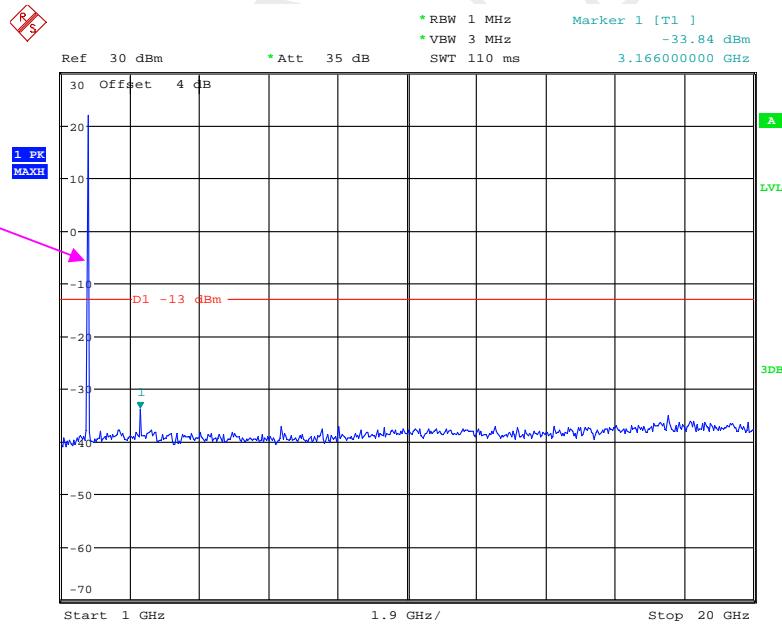


Fundamental

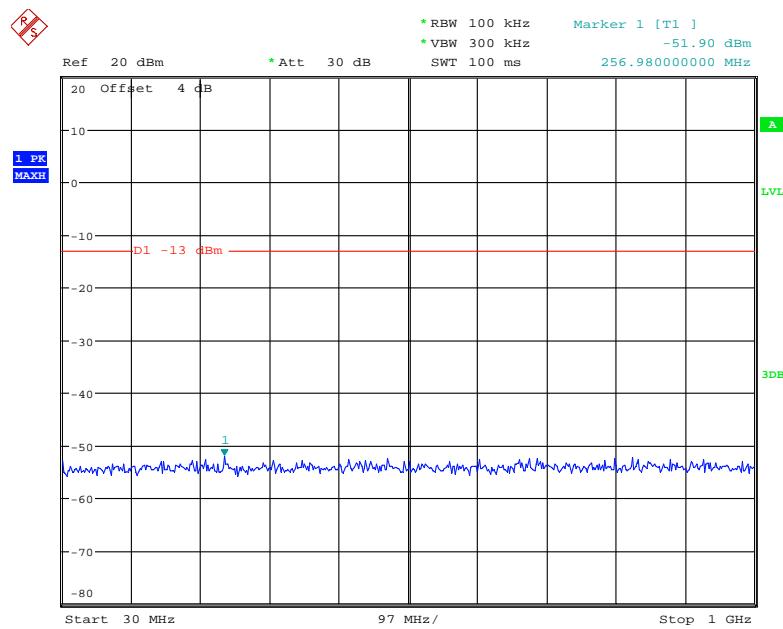
Date: 23.APR.2019 16:55:52

QPSK_5 MHz

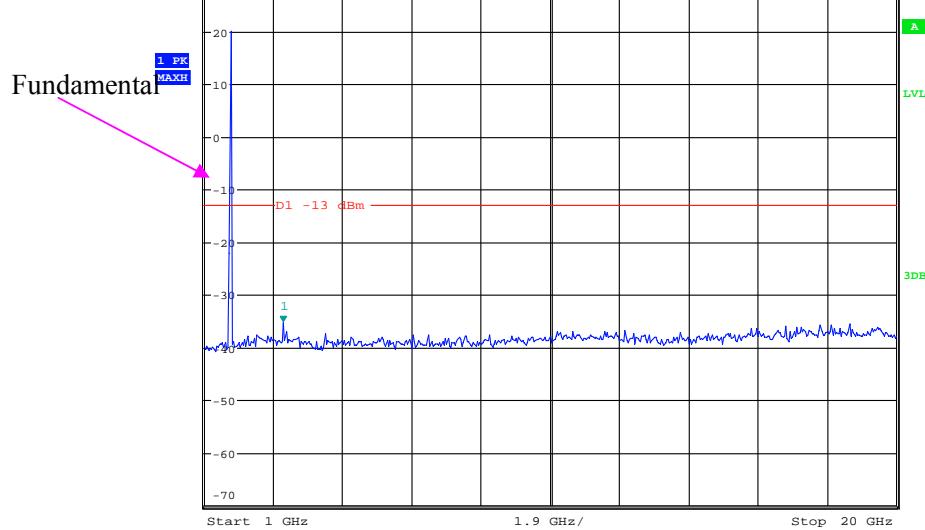
Date: 23.APR.2019 16:56:13



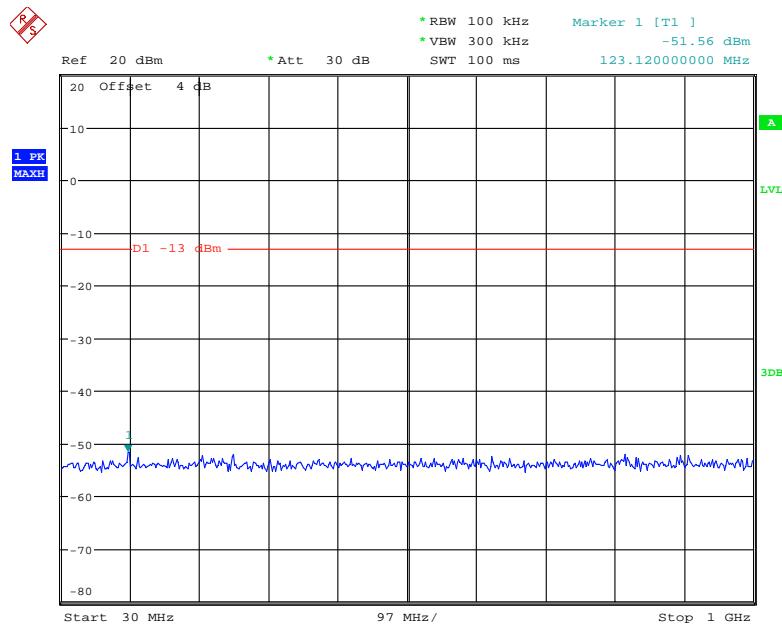
Date: 23.APR.2019 16:56:24

QPSK_10 MHz

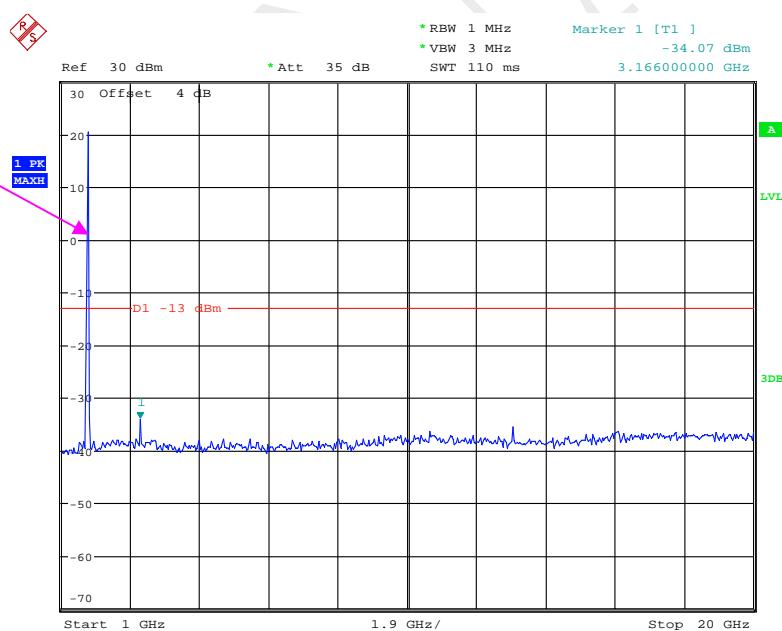
Date: 23.APR.2019 16:56:42



Date: 23.APR.2019 16:56:57

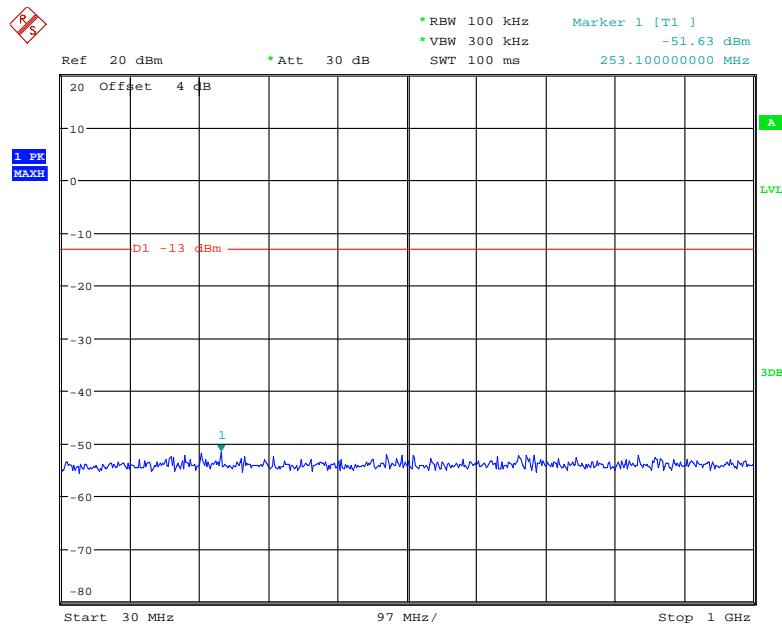
QPSK_15 MHz

Date: 23.APR.2019 16:57:21

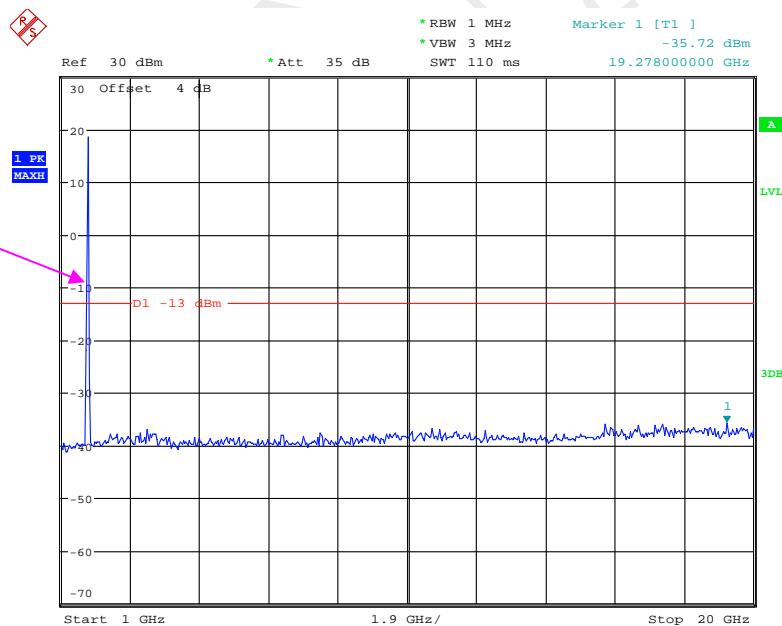


Date: 23.APR.2019 16:57:36

Fundamental

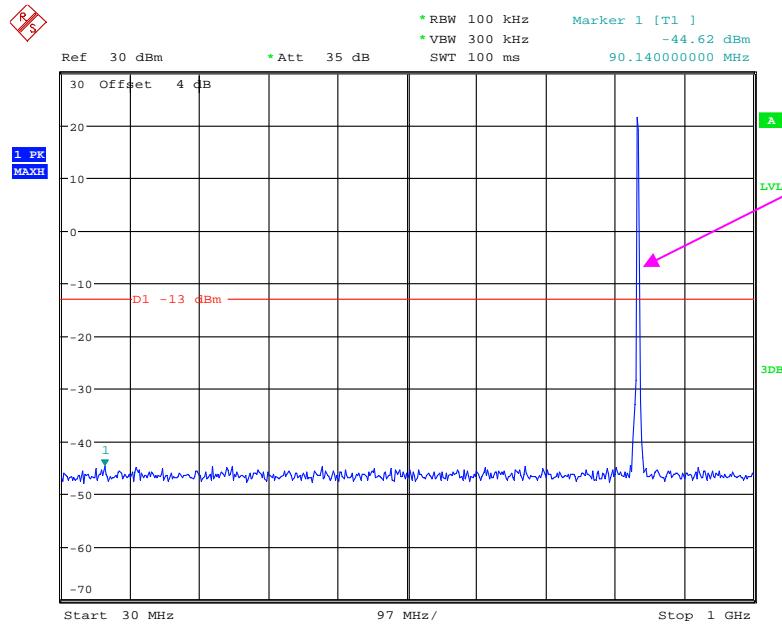
QPSK_20 MHz

Date: 23.APR.2019 16:58:01

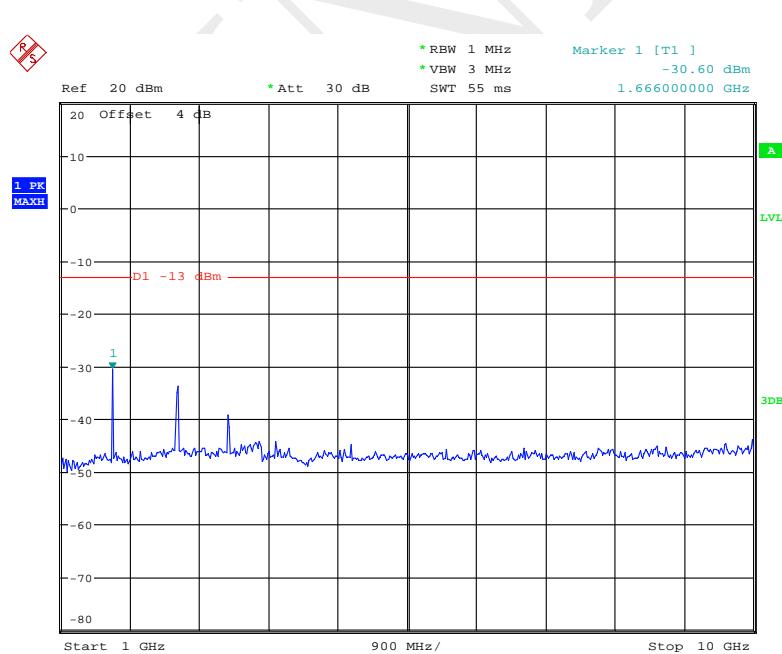


Fundamental

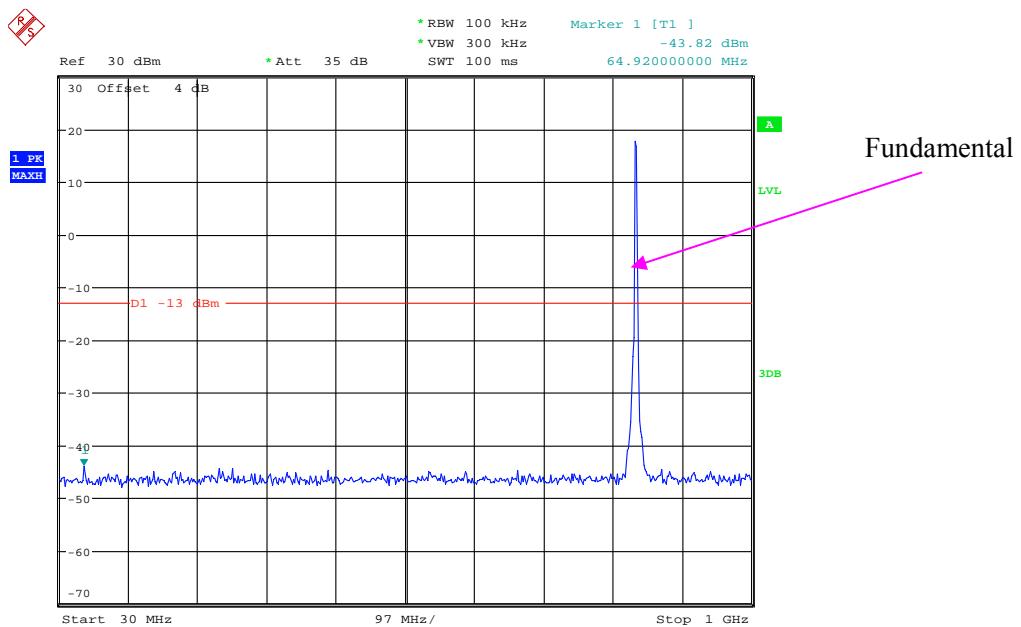
Date: 23.APR.2019 16:58:12

LTE Band 5**QPSK_1.4 MHz**

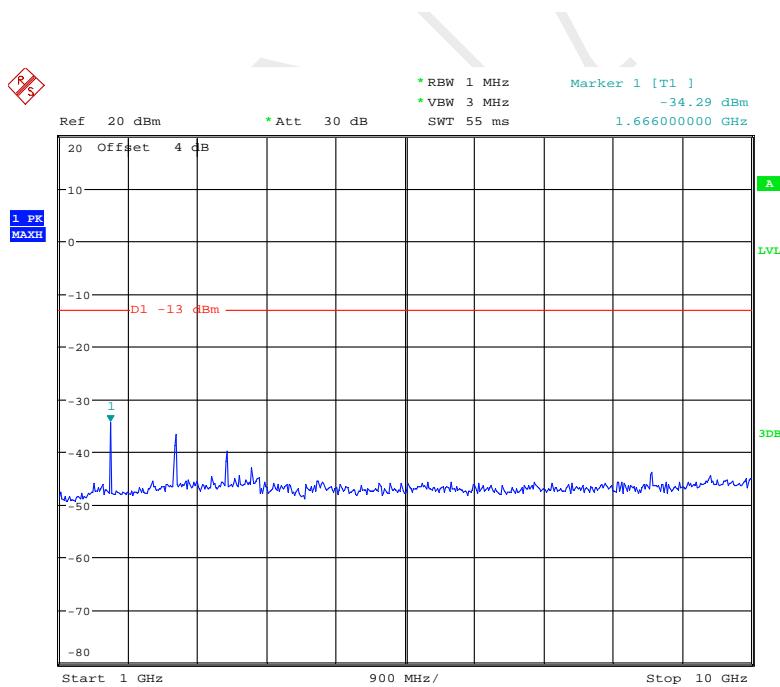
Date: 23.APR.2019 16:58:33



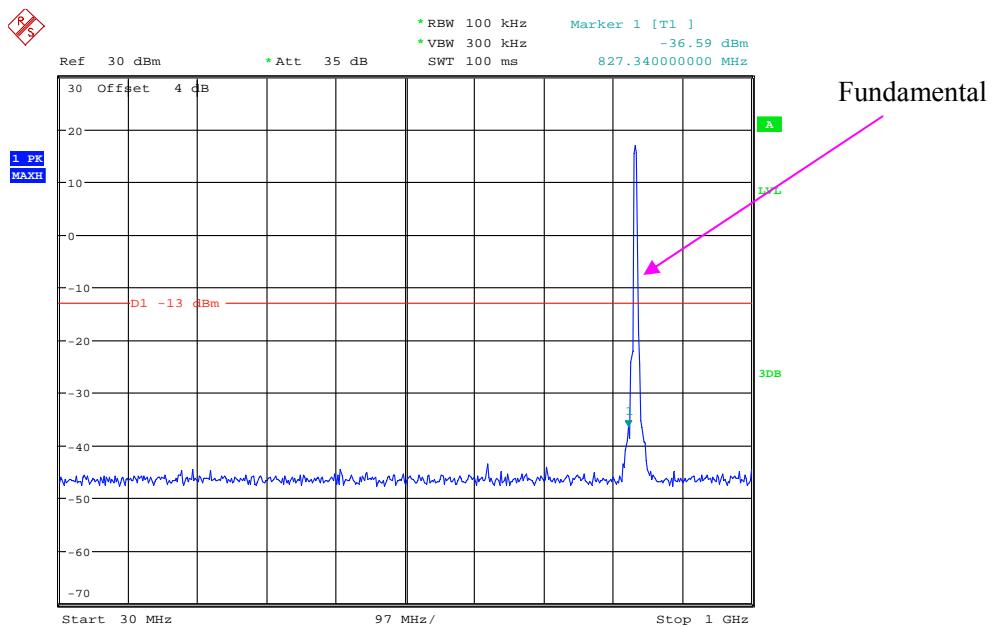
Date: 23.APR.2019 16:58:44

QPSK_3 MHz

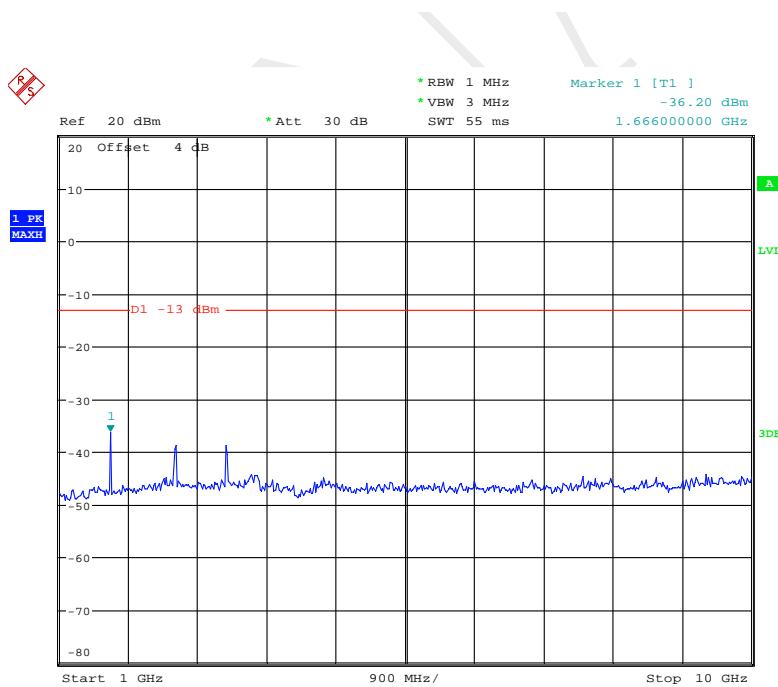
Date: 23.APR.2019 16:59:05



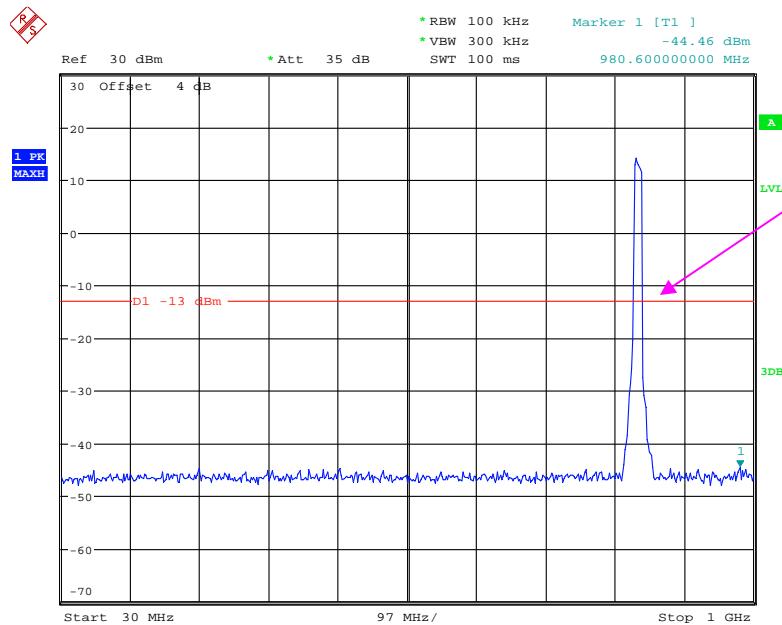
Date: 23.APR.2019 16:59:16

QPSK_5 MHz

Date: 23.APR.2019 16:59:37

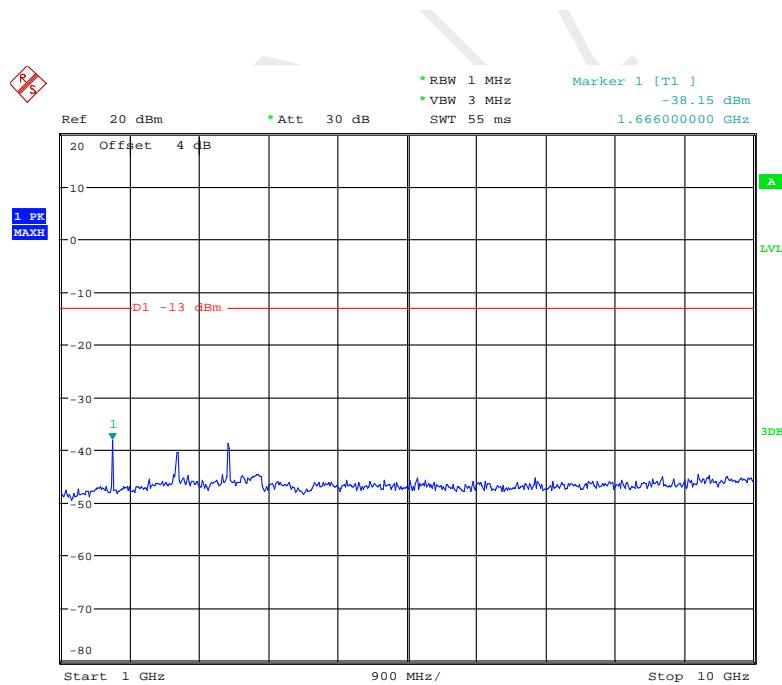


Date: 23.APR.2019 16:59:52

QPSK_10 MHz

Fundamental

Date: 23.APR.2019 17:00:14



Date: 23.APR.2019 17:00:28

FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53;

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
MICRO-COAX	Coaxial Cable	UFA147-1-2362-100100	64639 231029-001	2019-02-24	2020-02-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Sinoscite	Band-stop filter	BSF1710-1785MN-0383-003	0383003	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2018-06-16	2019-06-16
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2018-06-16	2019-06-16
R&S	Universal Radio Communication Tester	CMU200	106 891	2018/12/14	2019/12/14
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.1~27.2°C
Relative Humidity:	61~64 %
ATM Pressure:	100.2~100.8 kPa

* The testing was performed by Vern Shen Vito Chen,Elena Lei on 2019-04-26~2019-04-29.

Operation Mode: Transmitting

Test Result: Compliance, please refer to the below tables.

30 MHz-10 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band V R99, Frequency: 836.600 MHz								
1673.200	H	40.00	-64.38	10.5	1.27	-55.1	-13.0	42.1
1673.200	V	44.00	-60.31	10.5	1.27	-51.1	-13.0	38.1
2509.800	H	42.21	-60.56	12.2	1.25	-49.6	-13.0	36.6
2509.800	V	43.20	-60.96	12.2	1.25	-50.0	-13.0	37.0
3346.400	H	39.50	-61.69	12.3	1.58	-51.0	-13.0	38.0
3346.400	V	39.03	-61.09	12.3	1.58	-50.4	-13.0	37.4
404.420	H	40.63	-57.1	0.0	0.5	-57.6	-13.0	44.6
47.460	V	39.55	-52.95	0.0	0.51	-53.5	-13.0	40.5

30 MHz-20 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II R99, Frequency: 1880.000 MHz								
3760.000	H	59.30	-40.91	12.3	1.53	-30.2	-13.0	17.2
3760.000	V	58.50	-41.41	12.3	1.53	-30.7	-13.0	17.7
5640.000	H	48.50	-46.8	13.0	1.28	-35.1	-13.0	22.1
5640.000	V	45.00	-50.61	13.0	1.28	-38.9	-13.0	25.9
90.140	H	42.52	-55.95	0.0	0.49	-56.4	-13.0	43.4
53.280	V	43.22	-52.21	0.0	0.49	-52.7	-13.0	39.7

LTE Band 2 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1880.000 MHz								
3760.00	H	61.00	-39.21	12.25	1.53	-28.49	-13.00	15.49
3760.00	V	61.50	-38.41	12.25	1.53	-27.69	-13.00	14.69
5640.00	H	47.50	-47.80	13.00	1.28	-36.08	-13.00	23.08
5640.00	V	48.32	-47.29	13.00	1.28	-35.57	-13.00	22.57
802.12	H	44.48	-53.99	0.00	0.49	-54.48	-13.00	41.48
606.18	V	45.58	-54.28	0.00	0.36	-54.64	-13.00	41.64

LTE Band 4 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 1732.500 MHz								
3465.00	H	58.15	-42.82	12.21	1.60	-32.21	-13.00	19.21
3465.00	V	47.52	-52.04	12.21	1.60	-41.43	-13.00	28.43
5197.50	H	40.71	-55.37	12.92	1.36	-43.81	-13.00	30.81
5197.50	V	39.20	-56.85	12.92	1.36	-45.29	-13.00	32.29
802.12	H	42.63	-55.84	0.00	0.49	-56.33	-13.00	43.33
802.12	V	43.66	-51.77	0.00	0.49	-52.26	-13.00	39.26

LTE Band 5 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, Frequency: 836.500 MHz								
1673.00	H	43.99	-60.39	10.52	1.27	-51.14	-13.00	38.14
1673.00	V	46.10	-58.21	10.52	1.27	-48.96	-13.00	35.96
2509.50	H	44.35	-58.42	12.20	1.24	-47.46	-13.00	34.46
2509.50	V	49.50	-54.66	12.20	1.24	-43.70	-13.00	30.70
3346.00	H	40.20	-60.99	12.26	1.58	-50.31	-13.00	37.31
3346.00	V	40.50	-59.62	12.26	1.58	-48.94	-13.00	35.94
712.88	H	40.44	-60.15	0.00	0.39	-60.54	-13.00	47.54
757.50	V	40.52	-55.84	0.00	0.44	-56.28	-13.00	43.28

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

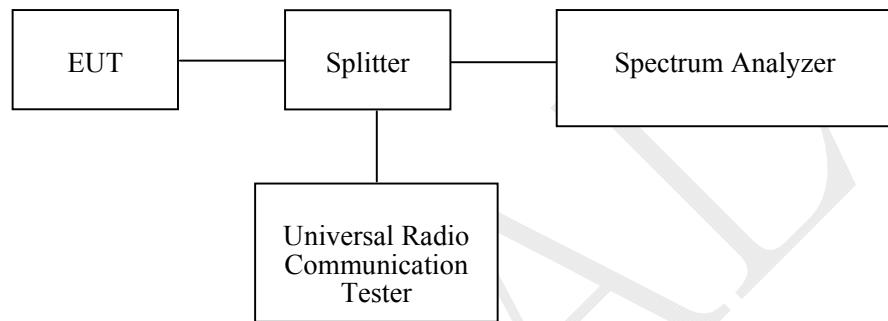
FCC §22.917(a) & §24.238(a) & §27.53- BAND EDGES**Applicable Standard**

FCC § 2.1053, §22.917, § 24.238 and § 27.53;

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05
R&S	Universal Radio Communication Tester	CMU200	106 891	2018/12/14	2019/12/14
E-Microwave	Two-way Spliter	ODP-1-6-2S	OE0120142	Each Time	/
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

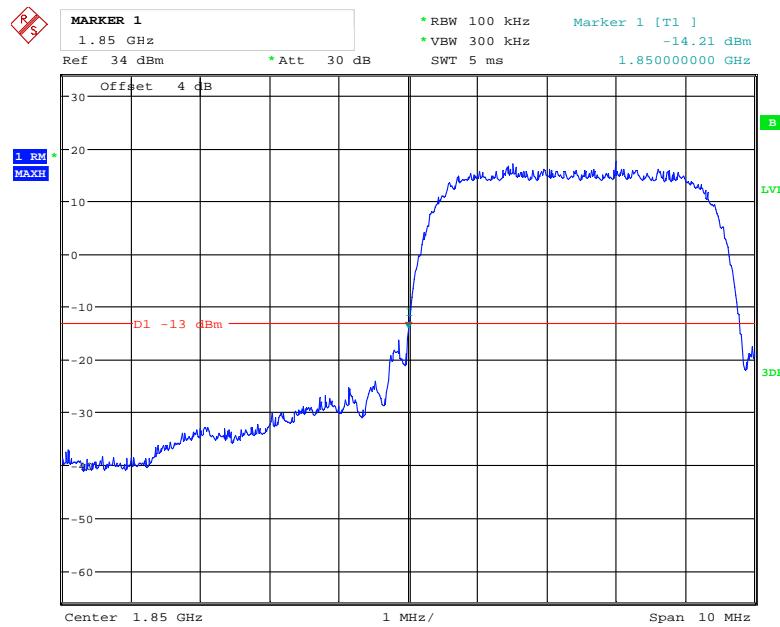
Environmental Conditions

Temperature:	24.1~27.2°C
Relative Humidity:	64~64 %
ATM Pressure:	100.2~10.8 kPa

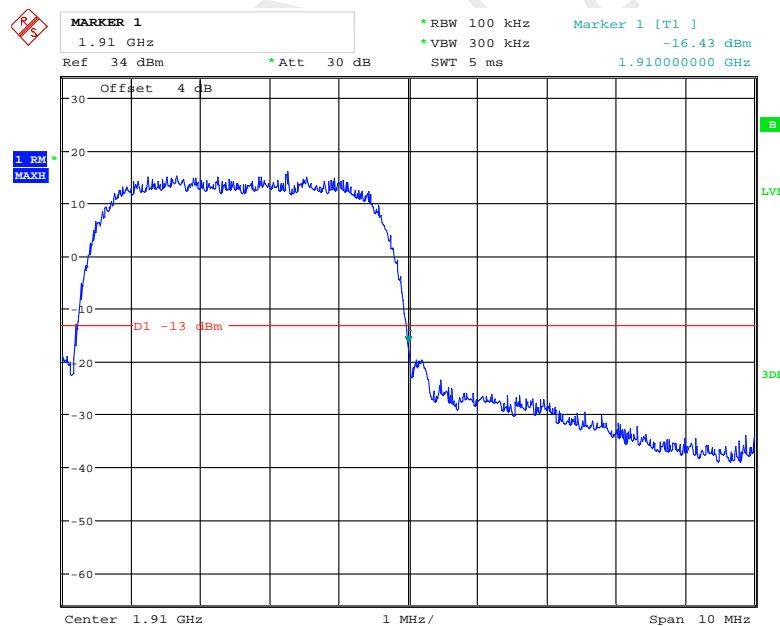
The testing was performed by Elena Lei on 2019-04-23~2019-04-29.

Test Mode: Transmitting

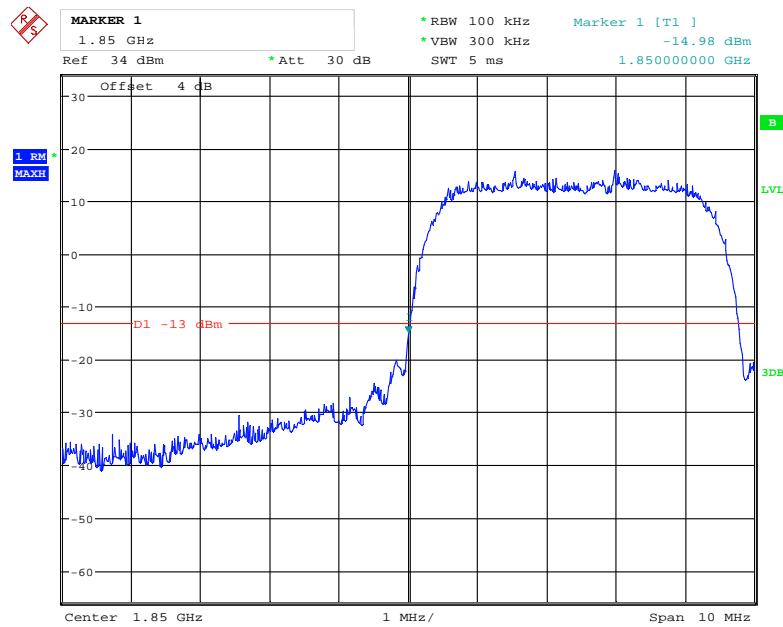
Test Result: Compliant. Please refer to the following plots.

WCDMA Band II Rel 99, Left Band Edge

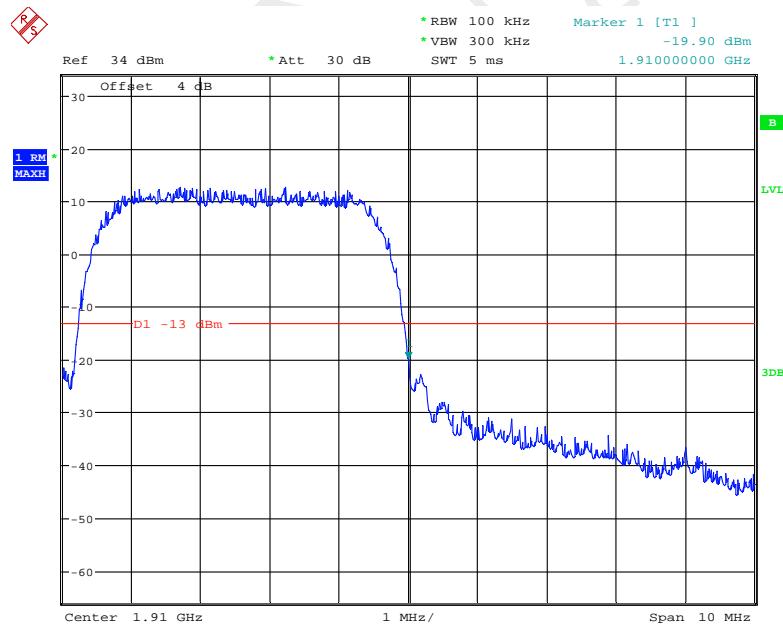
Date: 29.APR.2019 08:39:27

WCDMA Band II Rel 99, Right Band Edge

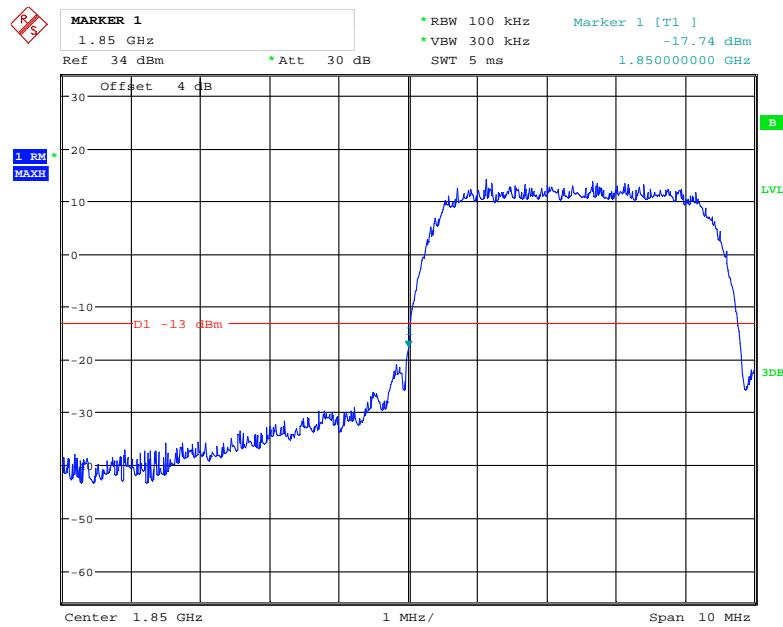
Date: 29.APR.2019 08:46:51

WCDMA Band II HSDPA, Left Band Edge

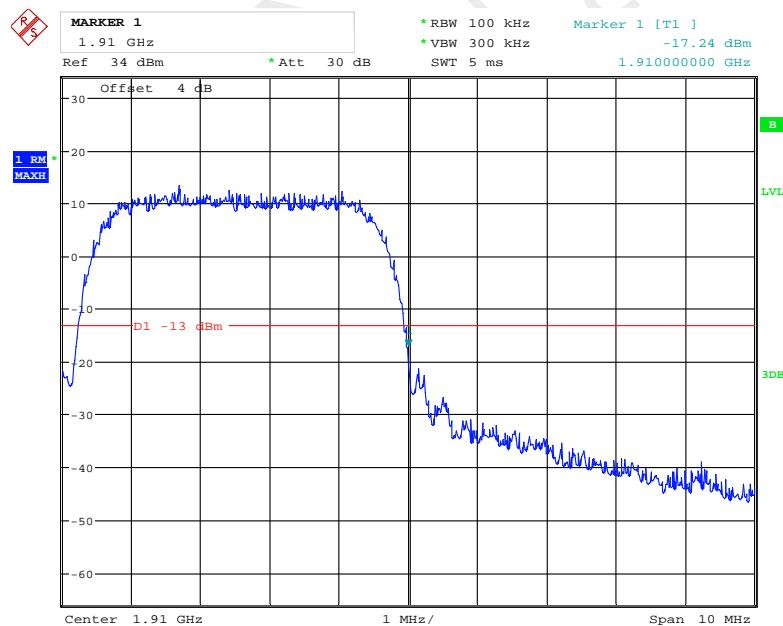
Date: 29.APR.2019 08:50:15

WCDMA Band II HSDPA, Right Band Edge

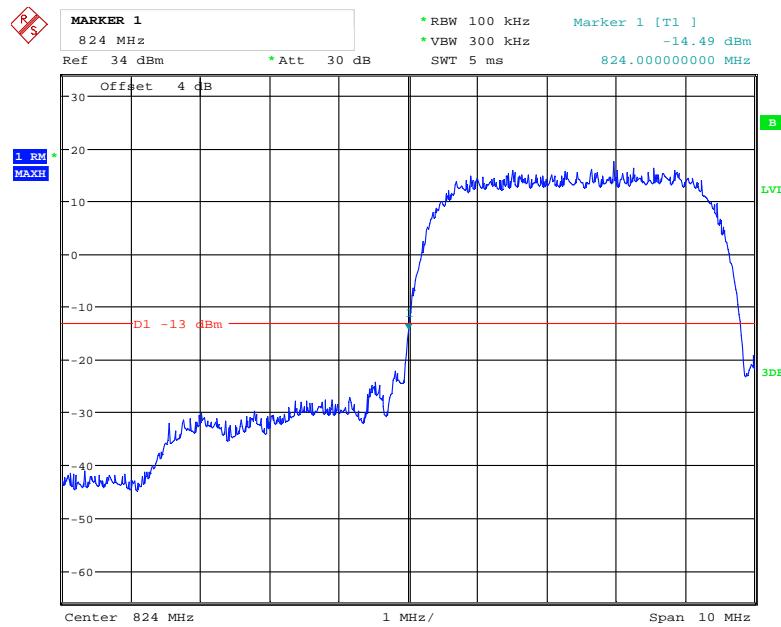
Date: 29.APR.2019 08:47:50

WCDMA Band II HSUPA, Left Band Edge

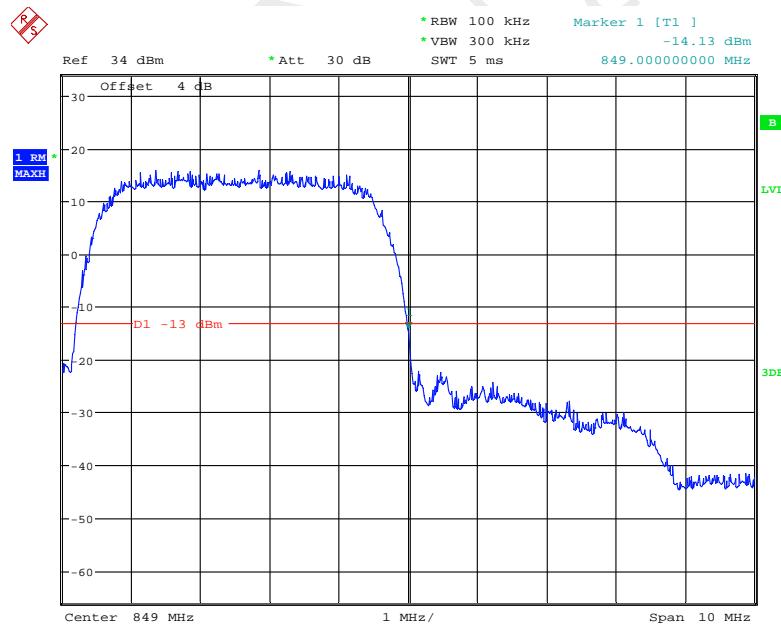
Date: 29.APR.2019 09:05:07

WCDMA Band II HSUPA, Right Band Edge

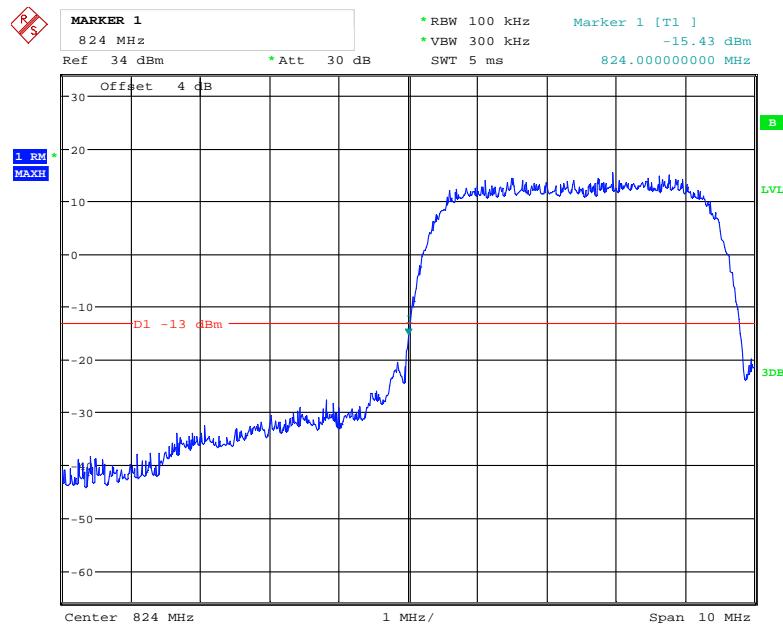
Date: 29.APR.2019 09:04:49

WCDMA Band V Rel 99, Left Band Edge

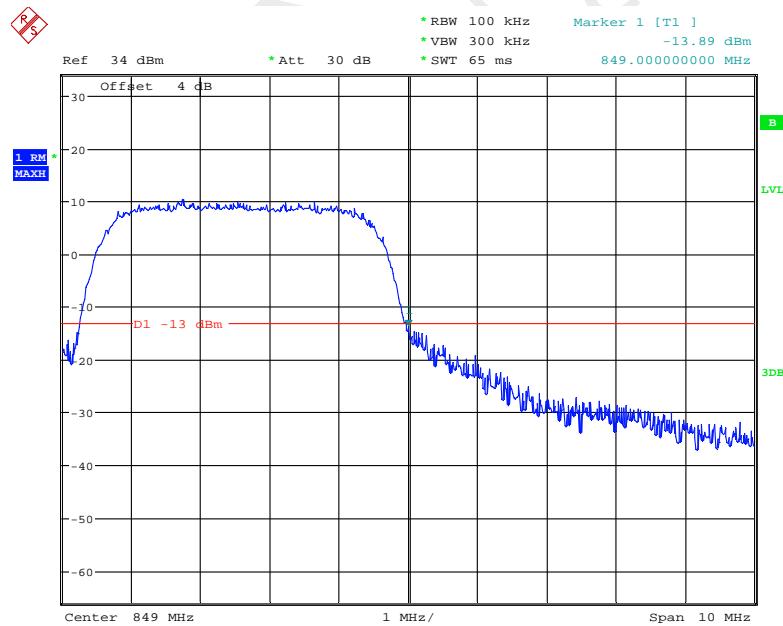
Date: 29.APR.2019 08:46:09

WCDMA Band V Rel 99, Right Band Edge

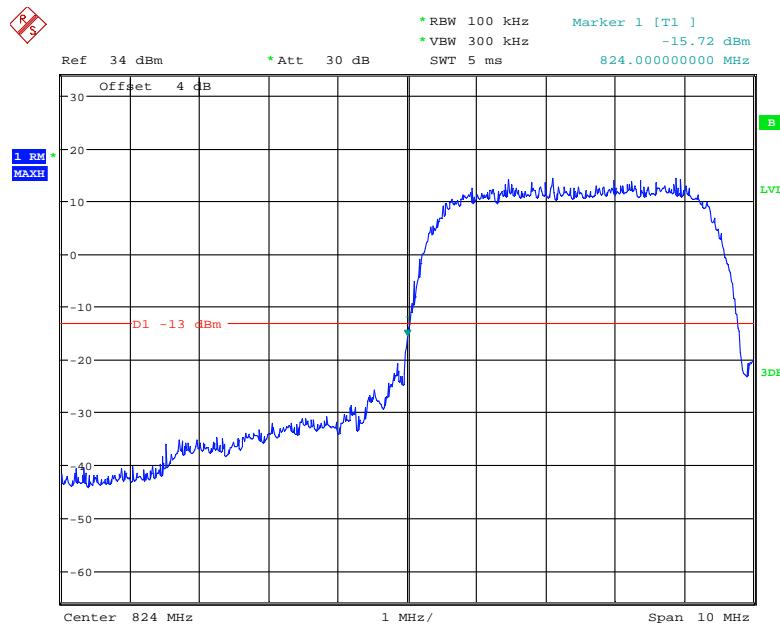
Date: 29.APR.2019 08:45:36

WCDMA Band V HSDPA, Left Band Edge

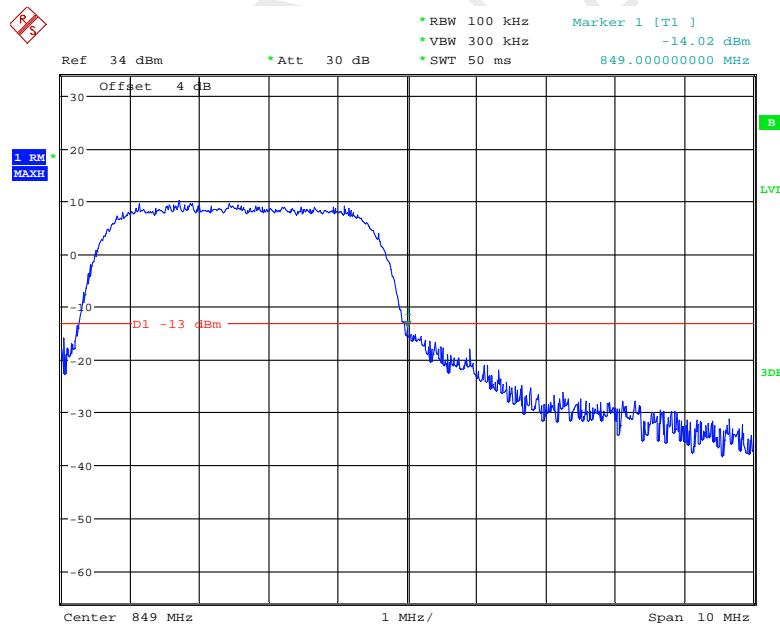
Date: 29.APR.2019 08:51:03

WCDMA Band V HSDPA, Right Band Edge

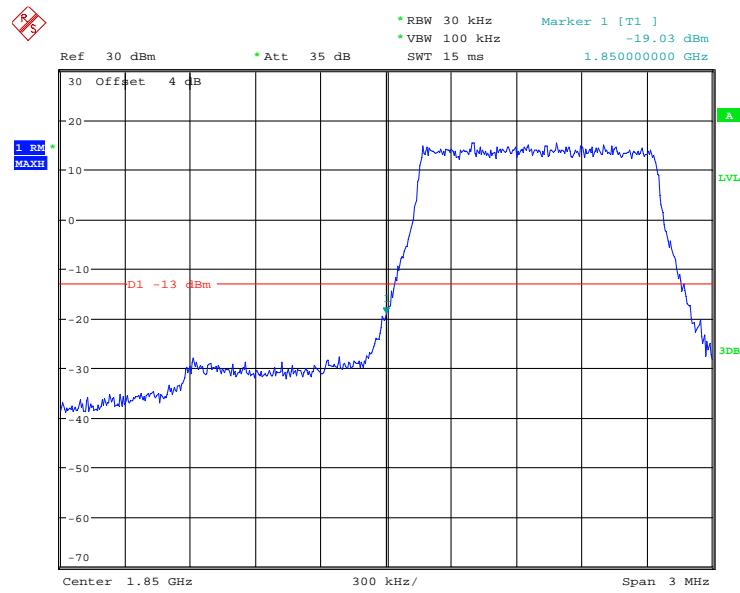
Date: 29.APR.2019 08:51:49

WCDMA Band V HSUPA, Left Band Edge

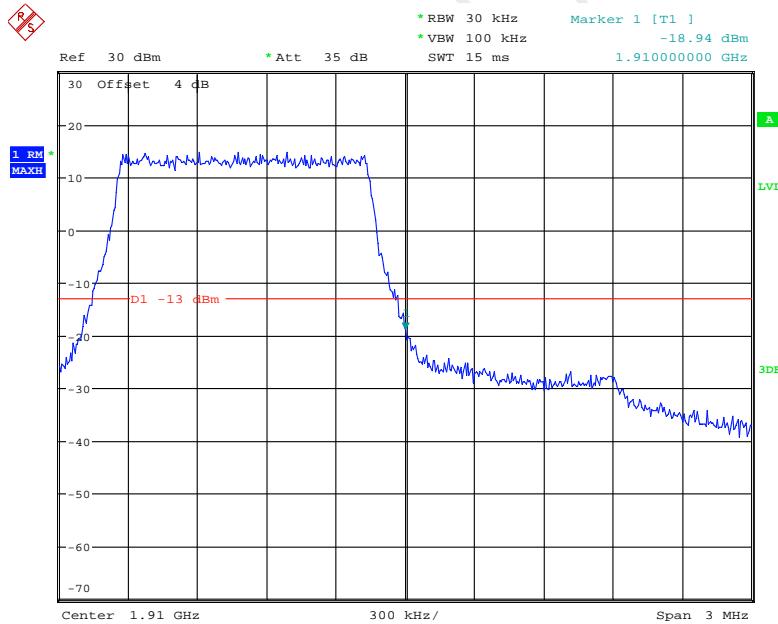
Date: 29.APR.2019 09:03:21

WCDMA Band V HSUPA, Right Band Edge

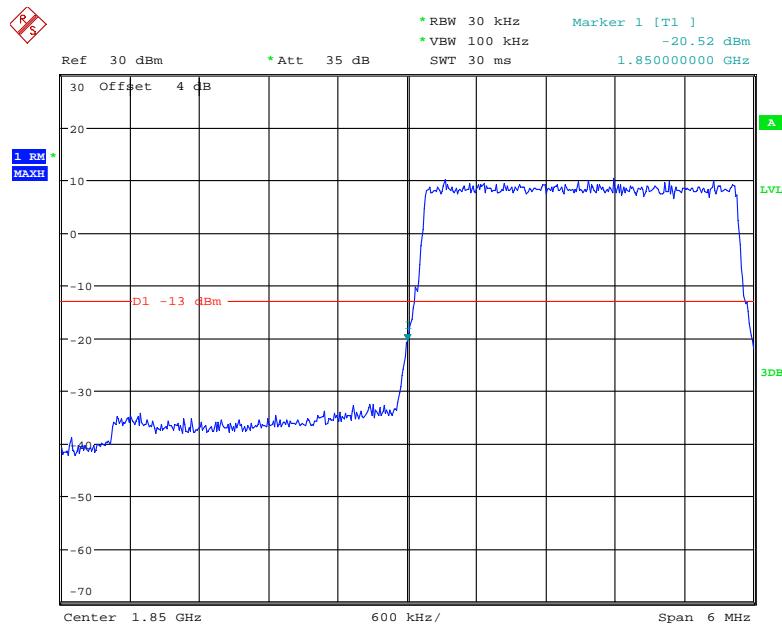
Date: 29.APR.2019 09:02:54

LTE Band 2**QPSK_1.4MHz_6 RB_Left**

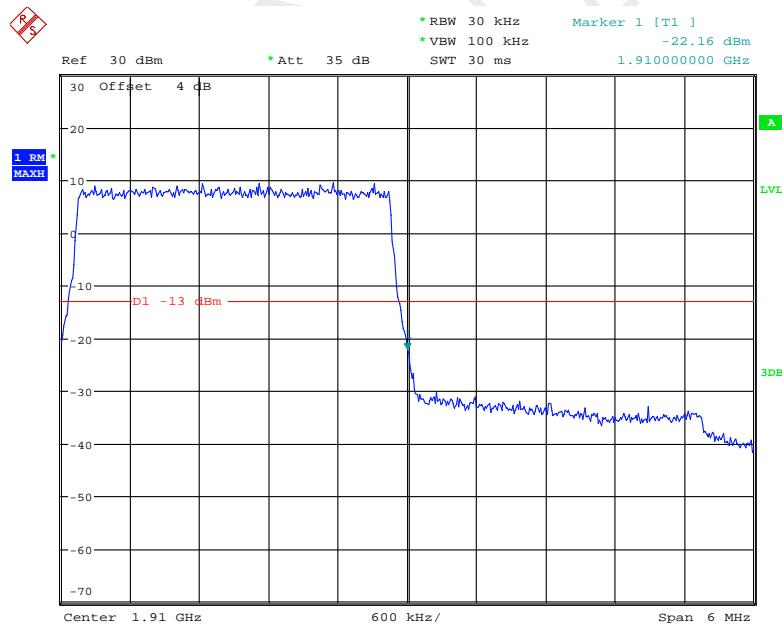
Date: 23.APR.2019 17:16:43

QPSK_1.4MHz_6 RB_Right

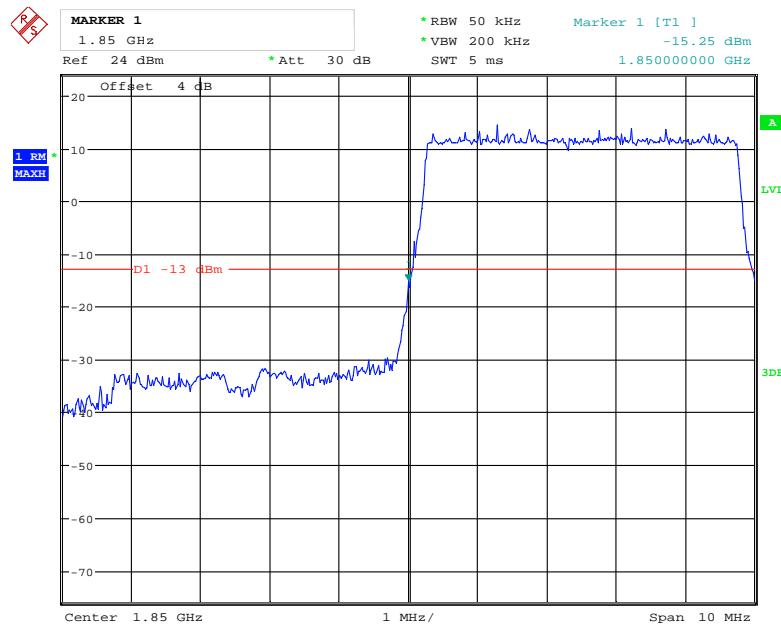
Date: 23.APR.2019 17:18:21

QPSK_3MHz_15 RB_Left

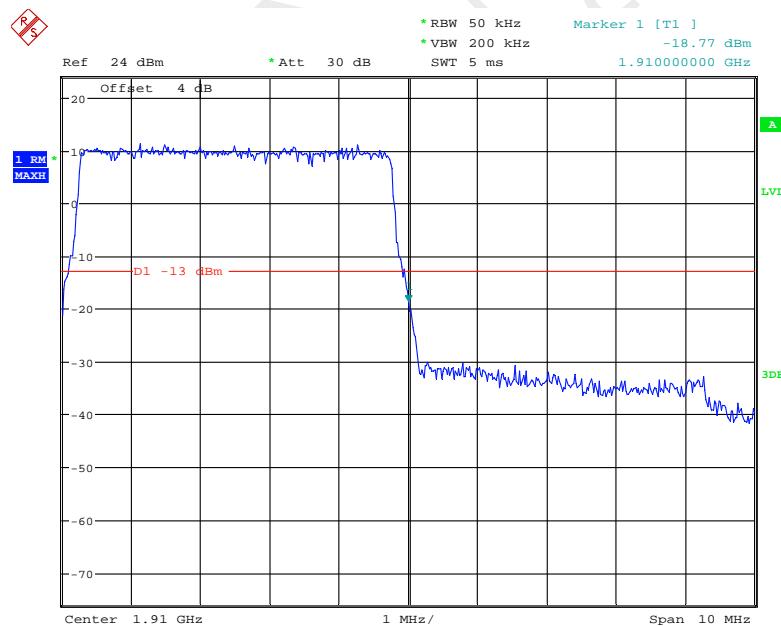
Date: 23.APR.2019 17:19:49

QPSK_3MHz_15 RB_Right

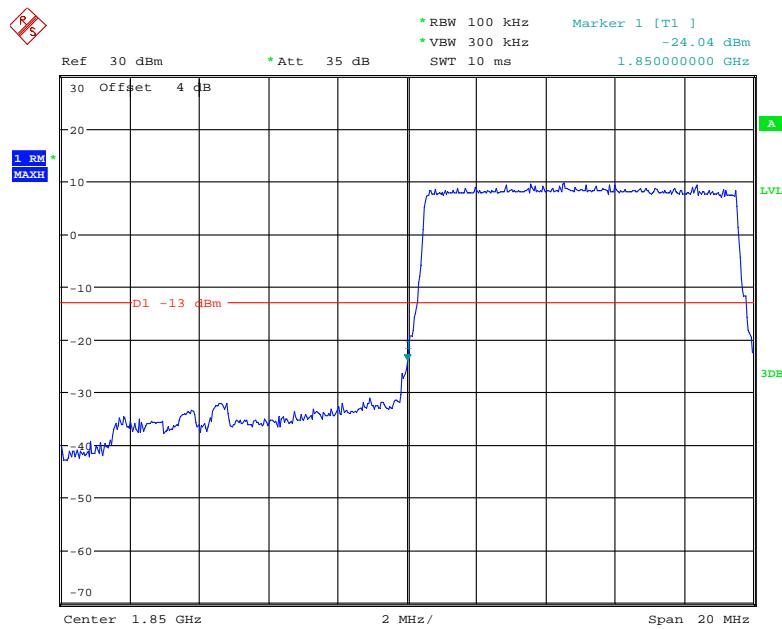
Date: 23.APR.2019 17:21:17

QPSK_5MHz_25 RB_Left

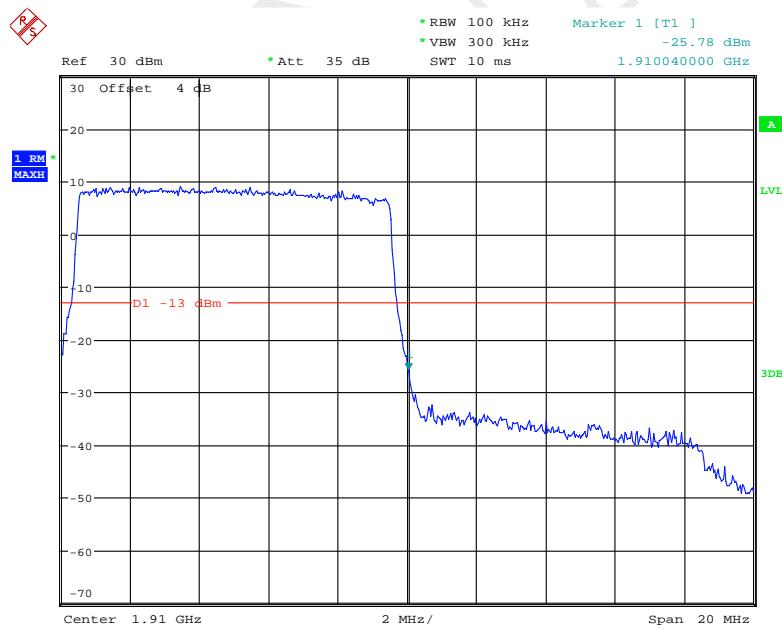
Date: 27.APR.2019 11:18:12

QPSK_5MHz_25 RB_Right

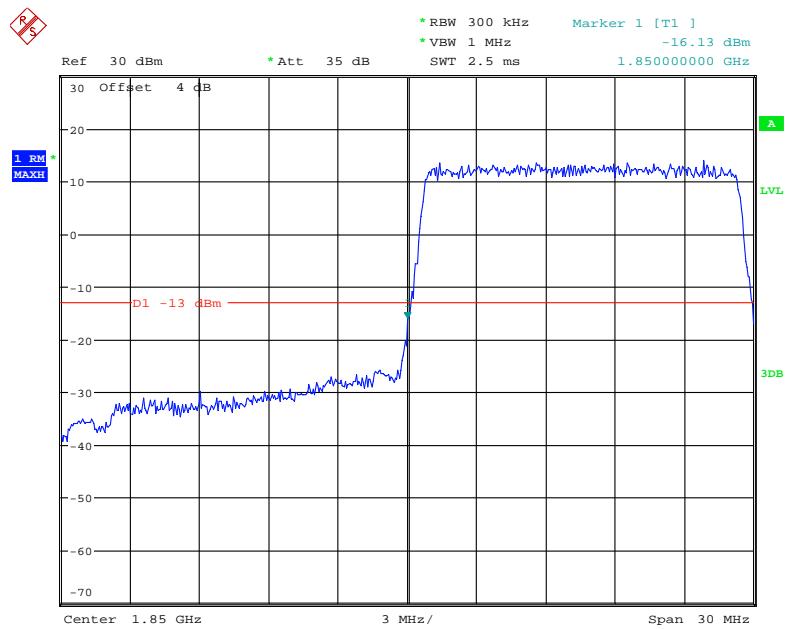
Date: 27.APR.2019 11:19:34

QPSK_10MHz_50 RB_Left

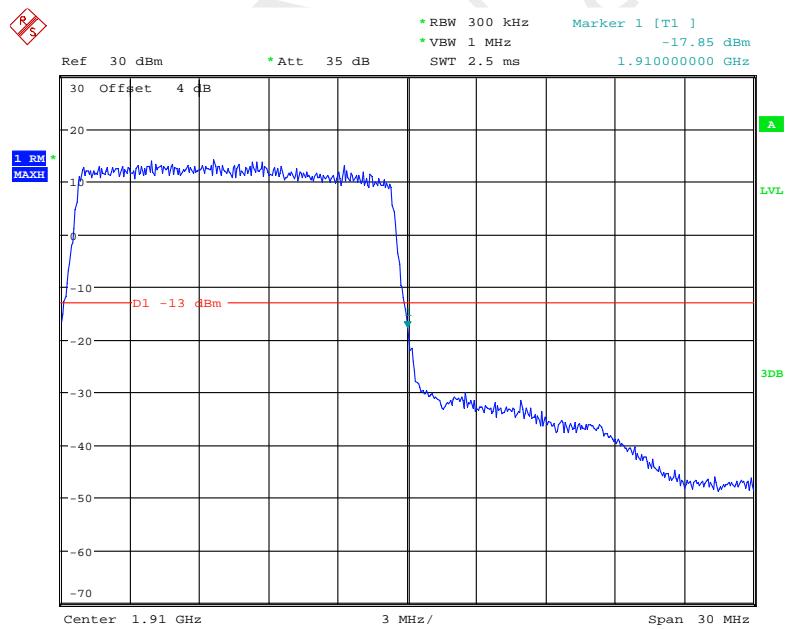
Date: 23.APR.2019 17:25:31

QPSK_10MHz_50 RB_Right

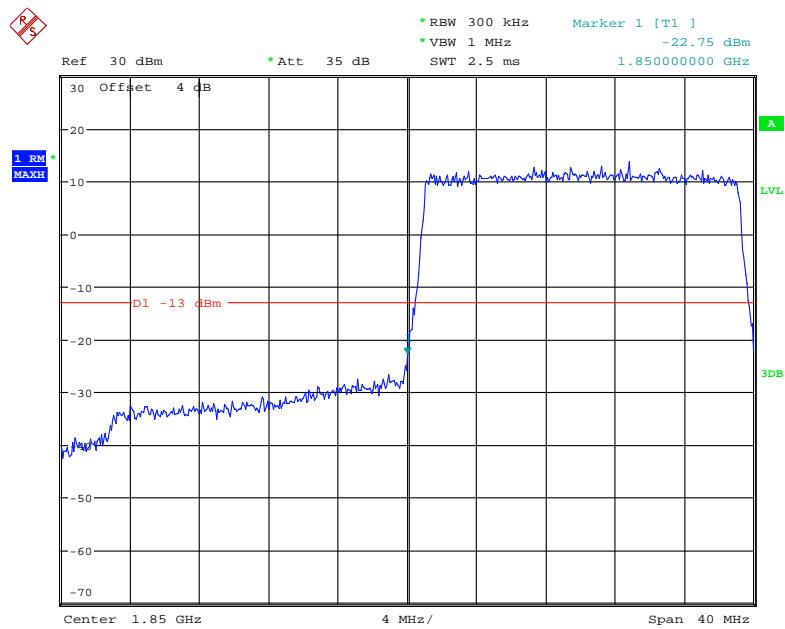
Date: 23.APR.2019 17:26:40

QPSK_15MHz_75 RB_Left

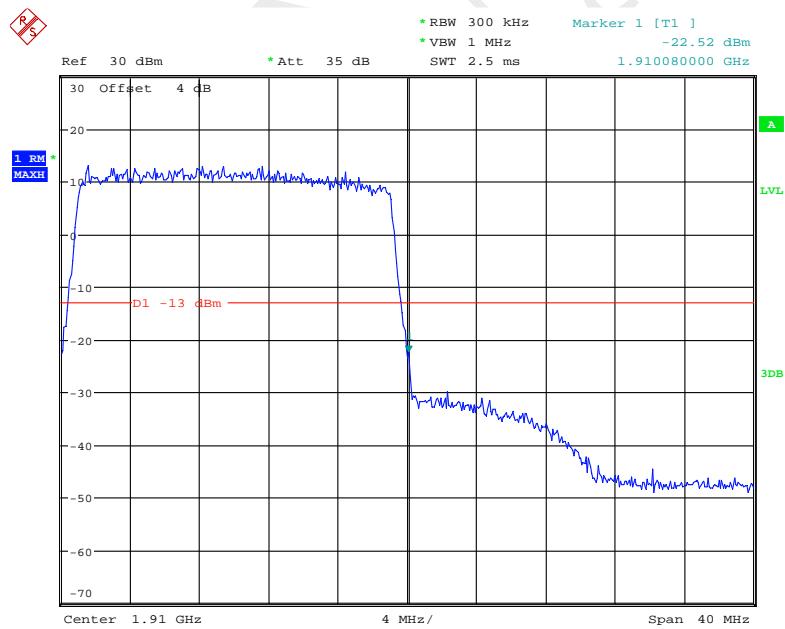
Date: 23.APR.2019 17:37:47

QPSK_15MHz_75 RB_Right

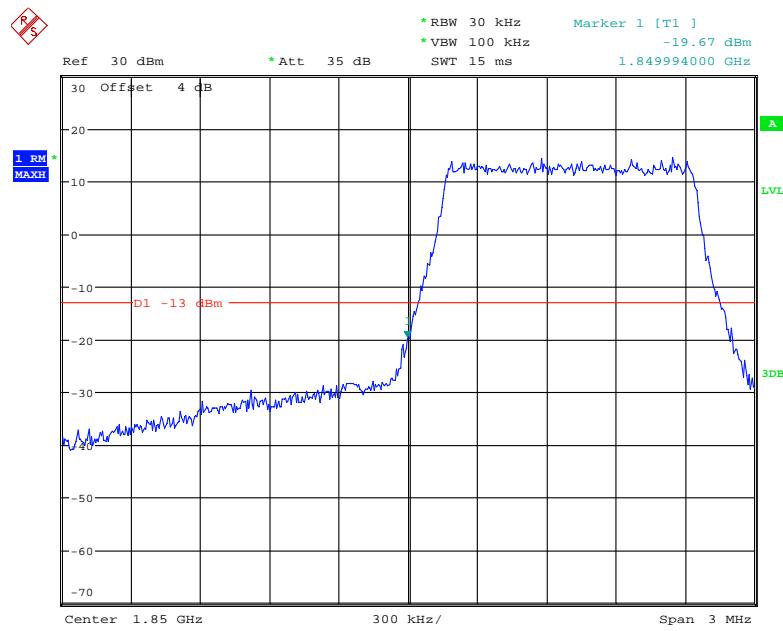
Date: 23.APR.2019 17:39:05

QPSK_20MHz_FULL RB_Left

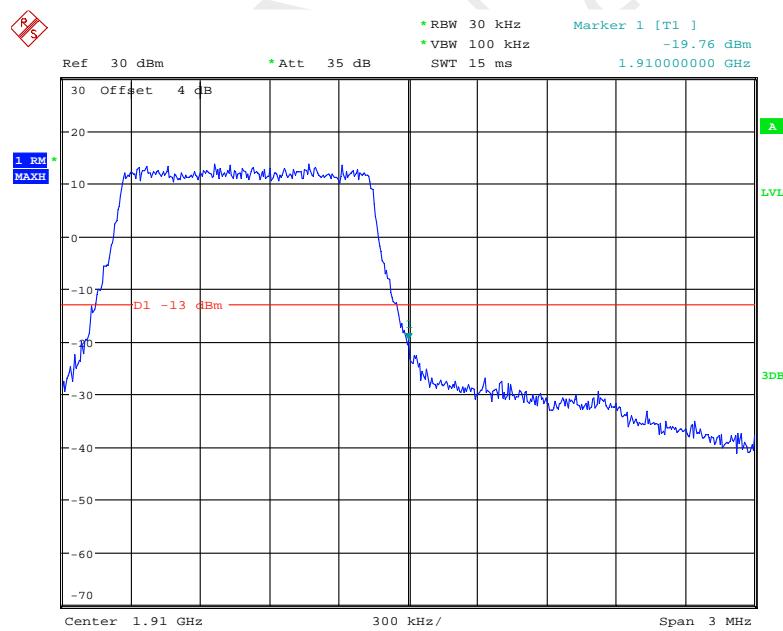
Date: 23.APR.2019 17:40:12

QPSK_20MHz_FULL RB_Right

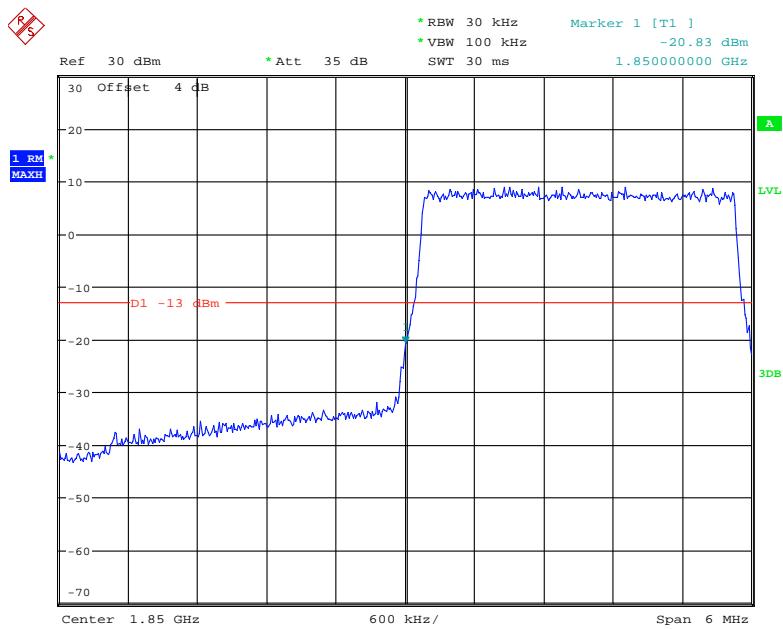
Date: 23.APR.2019 17:41:33

16QAM_1.4MHz_6 RB_Left

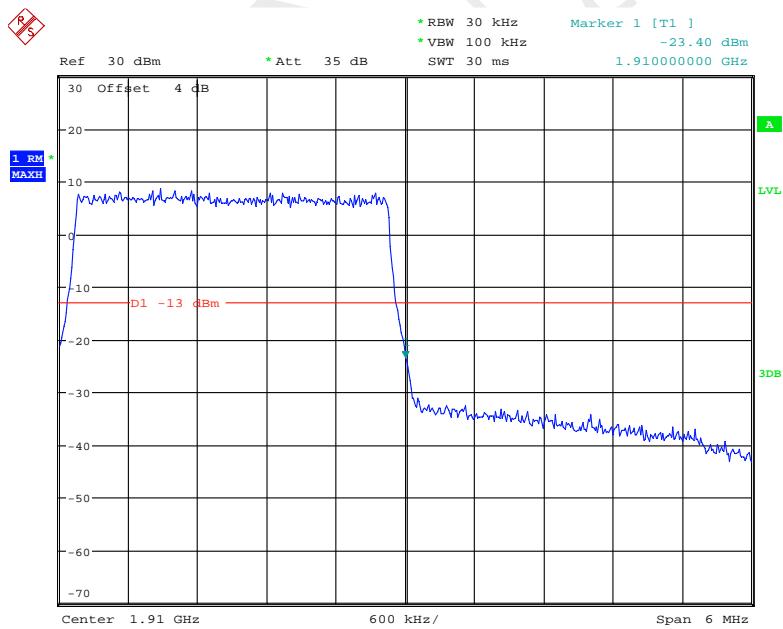
Date: 23.APR.2019 17:17:17

16QAM_1.4MHz_6 RB_Right

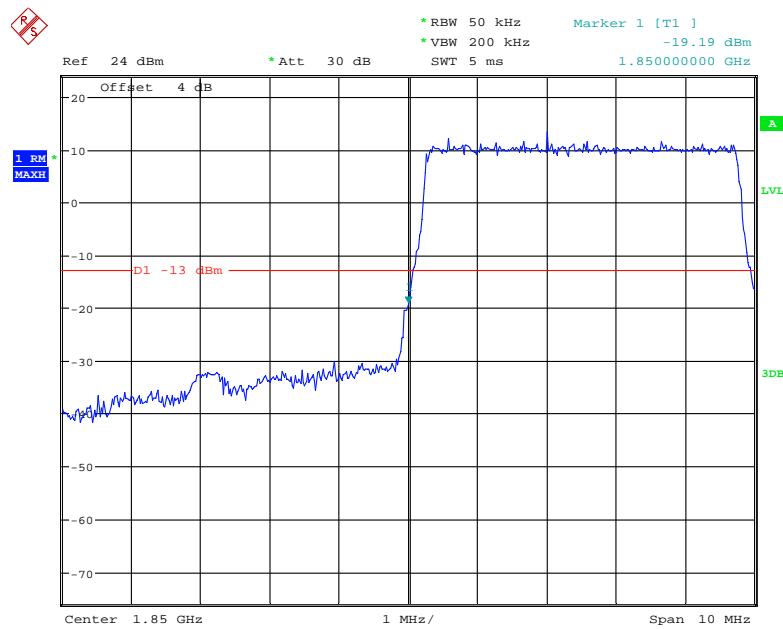
Date: 23.APR.2019 17:19:05

16QAM_3MHz_15 RB_Left

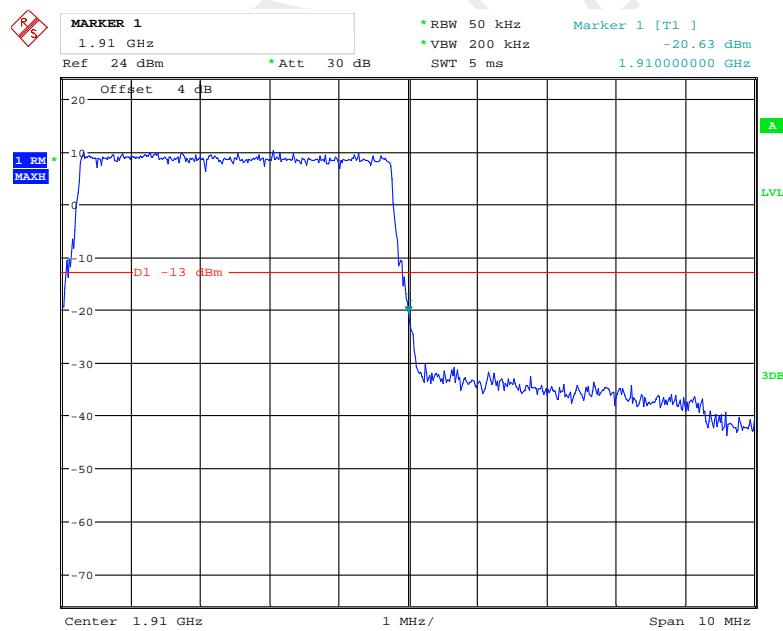
Date: 23.APR.2019 17:20:29

16QAM_3MHz_15 RB_Right

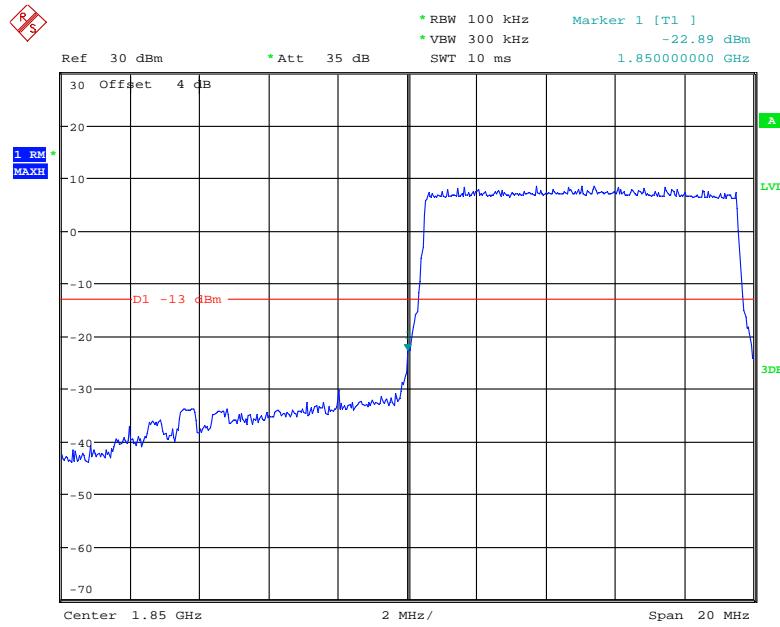
Date: 23.APR.2019 17:22:05

16QAM_5MHz_25 RB_Left

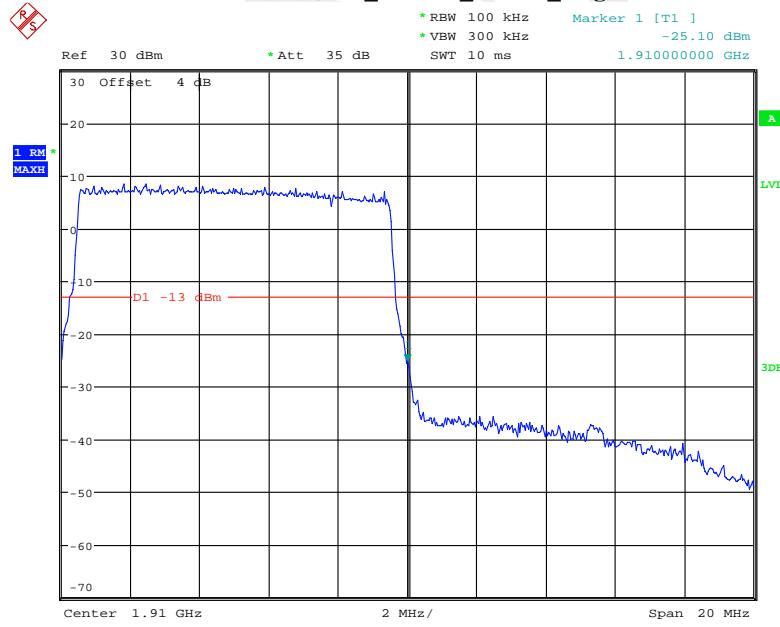
Date: 27.APR.2019 11:18:35

16QAM_5MHz_25 RB_Right

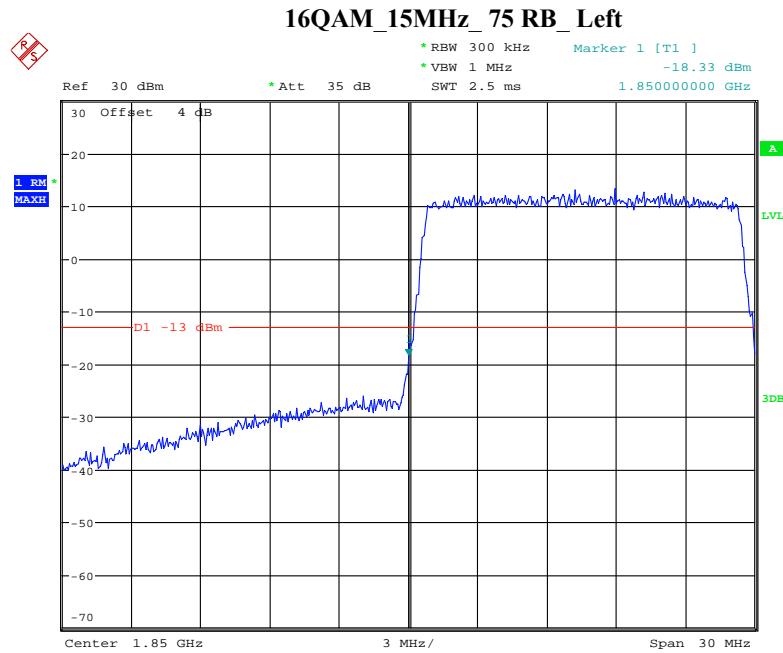
Date: 27.APR.2019 11:19:09

16QAM_10MHz_50 RB_Left

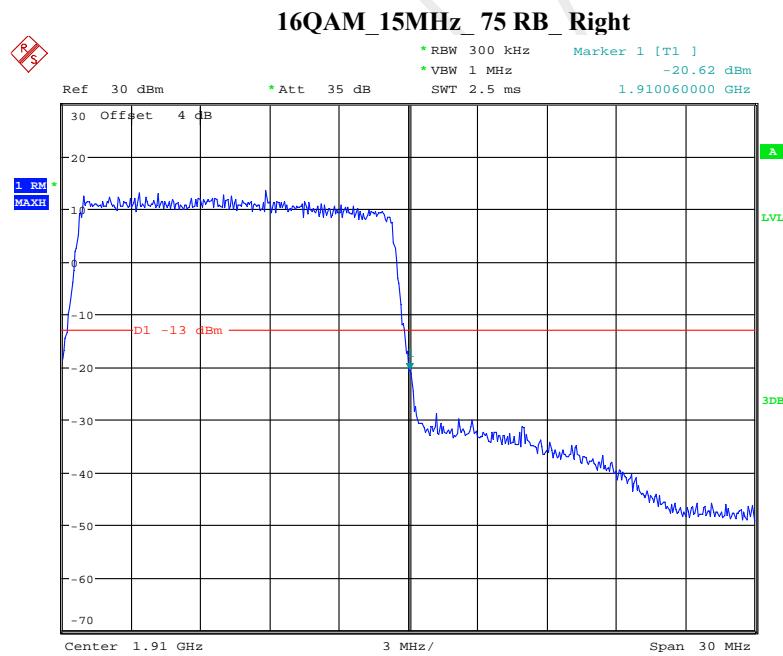
Date: 23.APR.2019 17:26:09

16QAM_10MHz_50 RB_Right

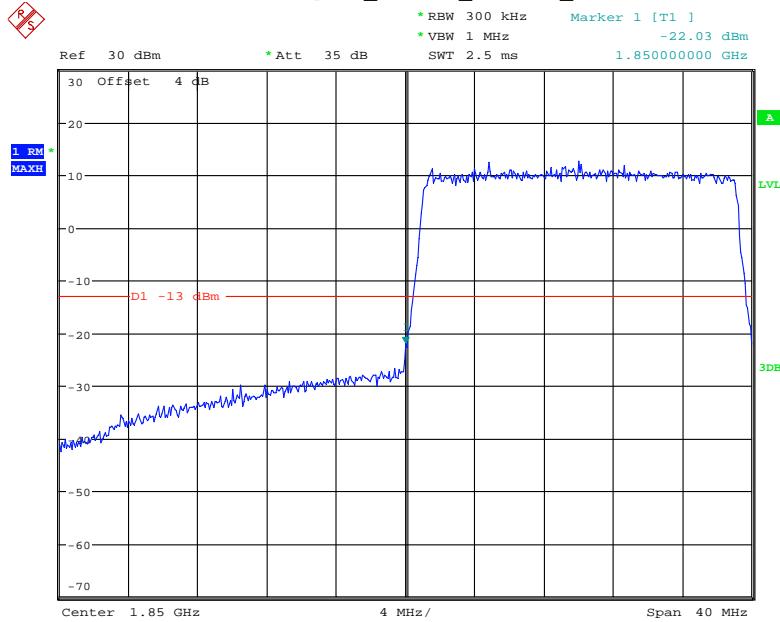
Date: 23.APR.2019 17:37:02



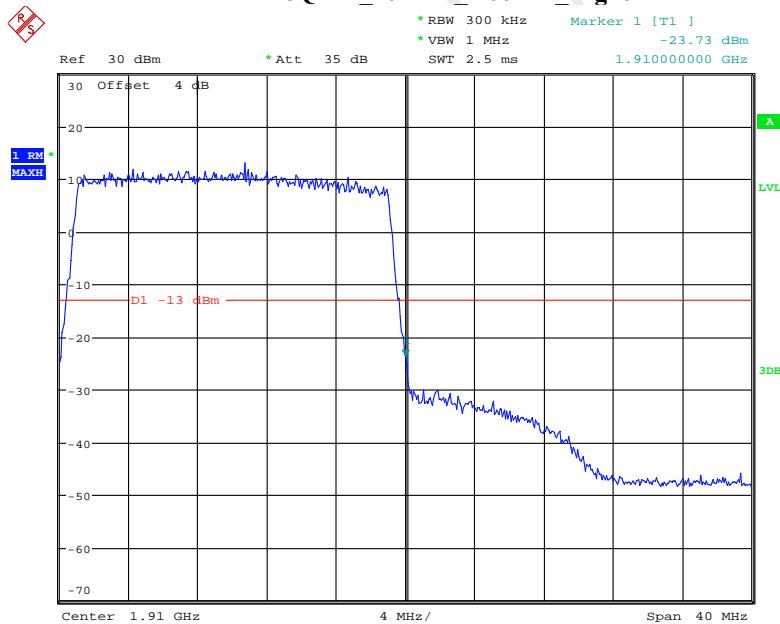
Date: 23.APR.2019 17:38:20



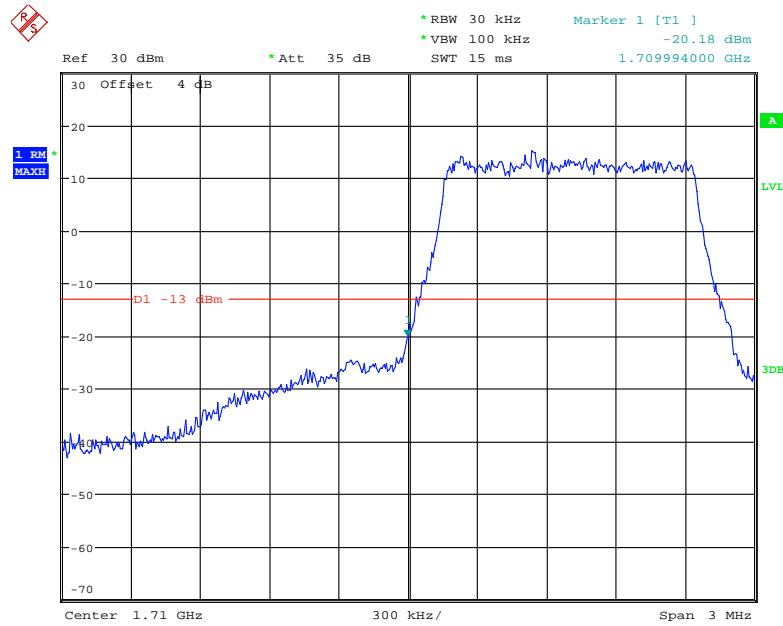
Date: 23.APR.2019 17:39:34

16QAM_20MHz_100 RB_Left

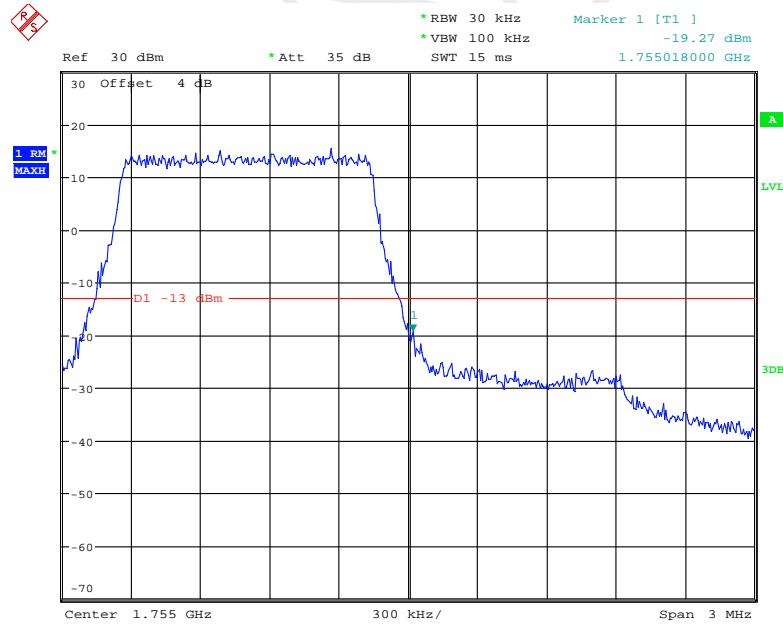
Date: 23.APR.2019 17:40:52

16QAM_20MHz_100 RB_Right

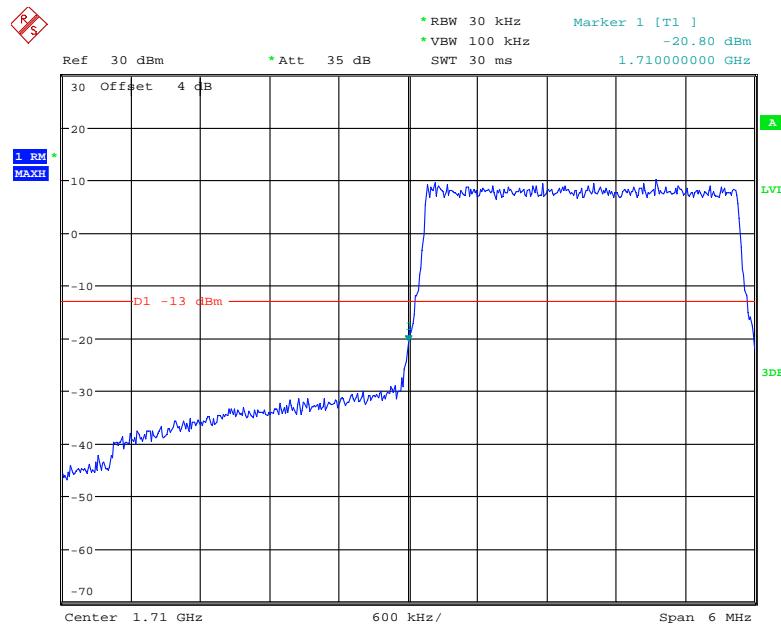
Date: 23.APR.2019 17:42:17

LTE Band 4**QPSK_1.4MHz_6 RB_Left**

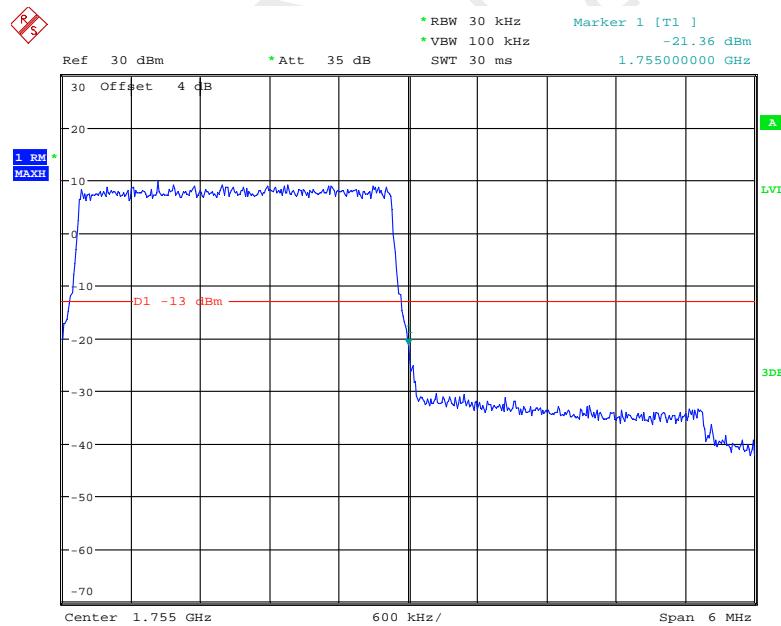
Date: 23.APR.2019 17:43:06

QPSK_1.4MHz_6 RB_Right

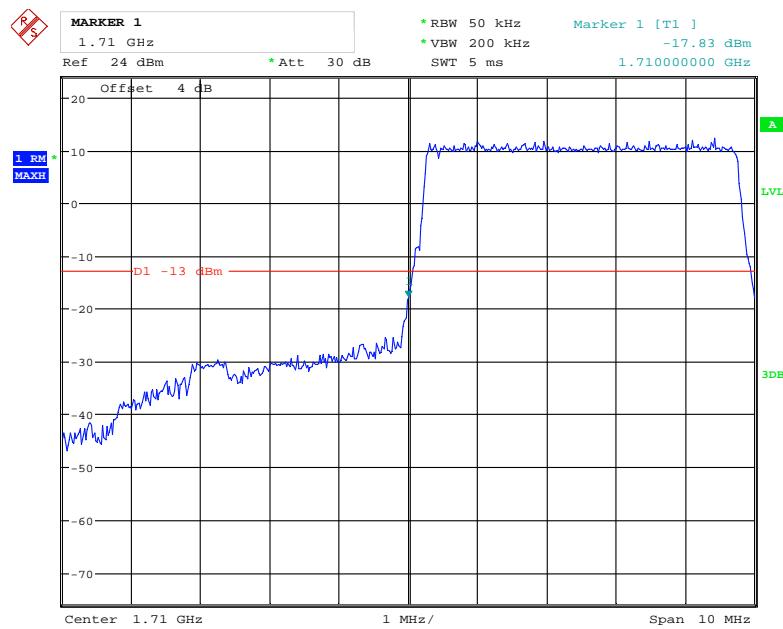
Date: 23.APR.2019 17:44:25

QPSK_3MHz_15 RB_Left

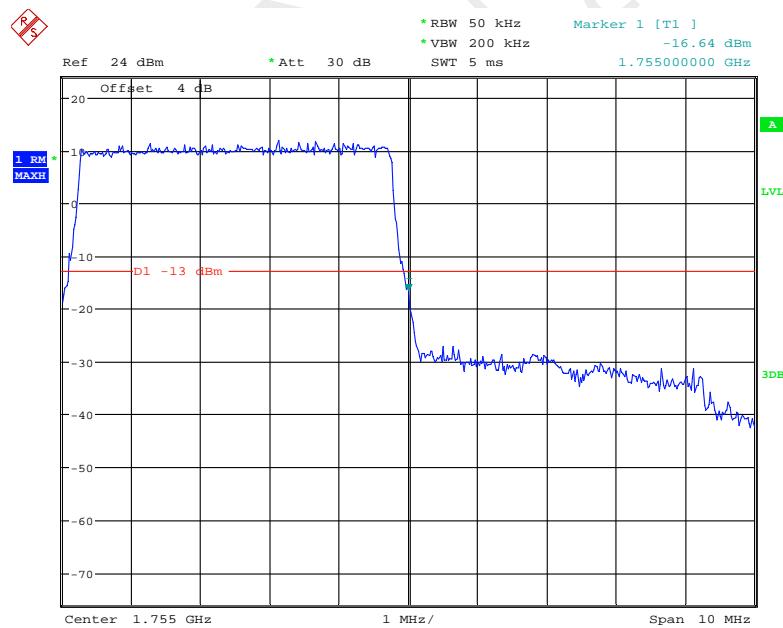
Date: 23.APR.2019 17:45:39

QPSK_3MHz_15 RB_Right

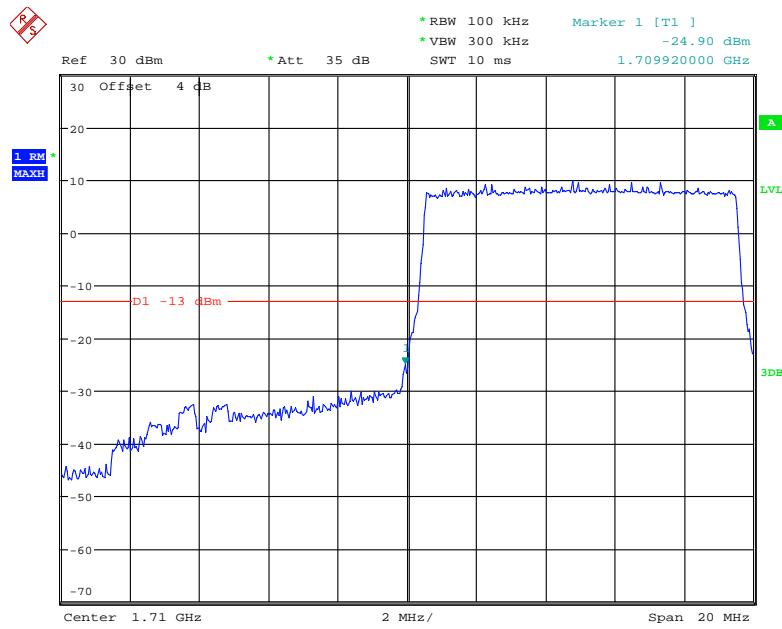
Date: 23.APR.2019 17:46:50

QPSK_5MHz_25 RB_Left

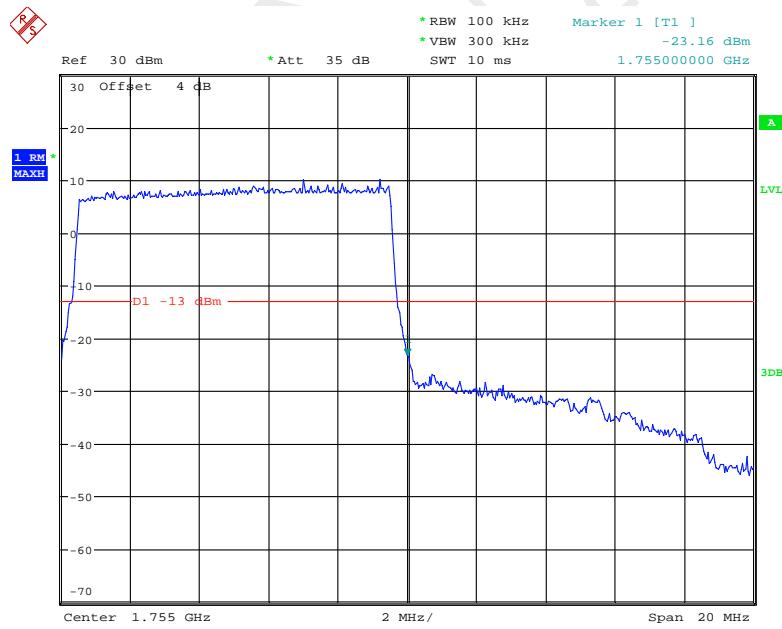
Date: 27.APR.2019 11:21:05

QPSK_5MHz_25 RB_Right

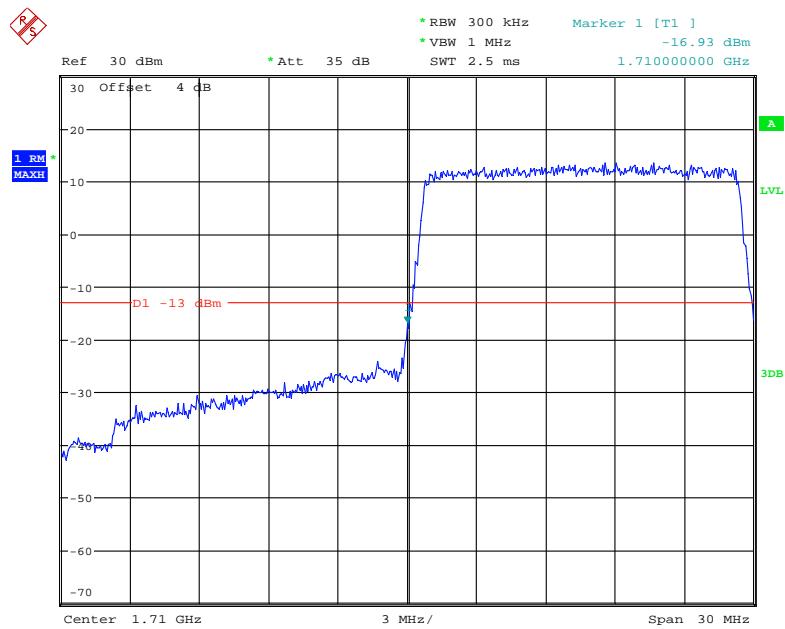
Date: 27.APR.2019 11:22:24

QPSK_10MHz_50 RB_Left

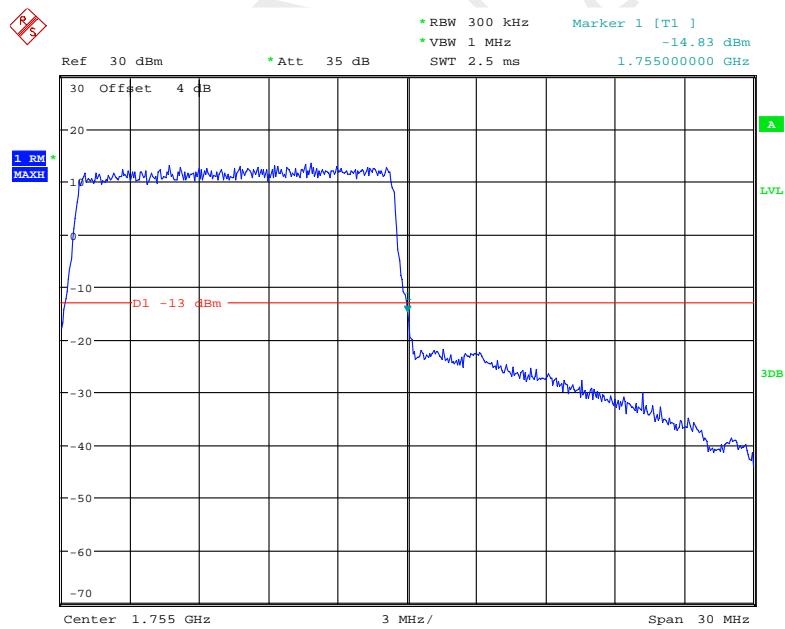
Date: 23.APR.2019 17:50:47

QPSK_10MHz_50 RB_Right

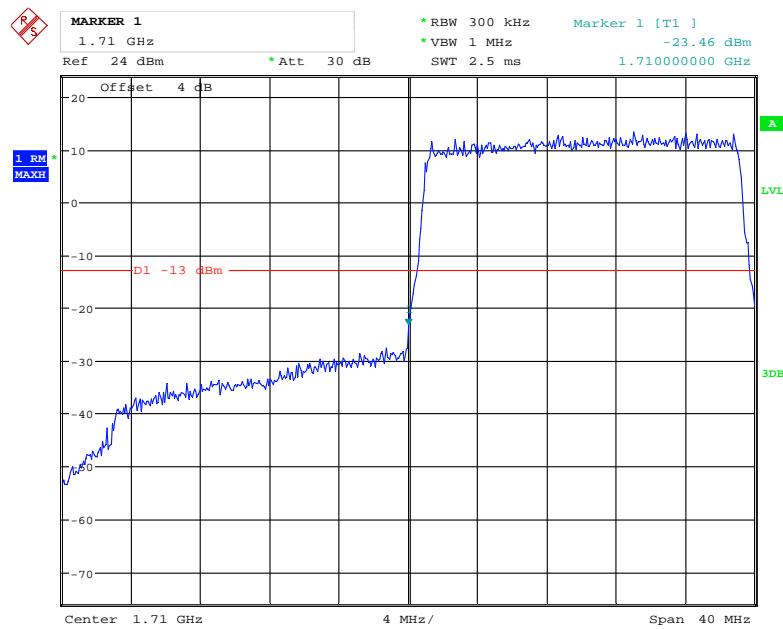
Date: 23.APR.2019 17:52:03

QPSK_15MHz_75 RB_Left

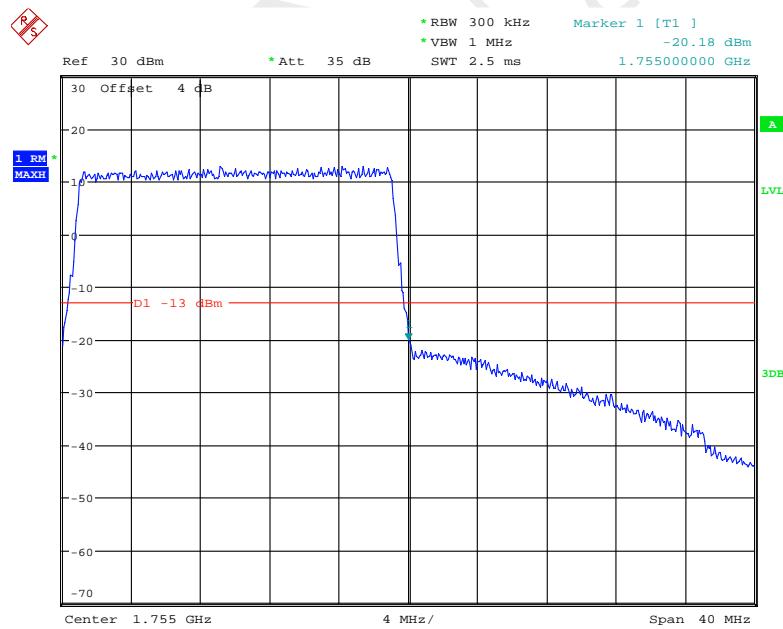
Date: 23.APR.2019 17:53:29

QPSK_15MHz_75 RB_Right

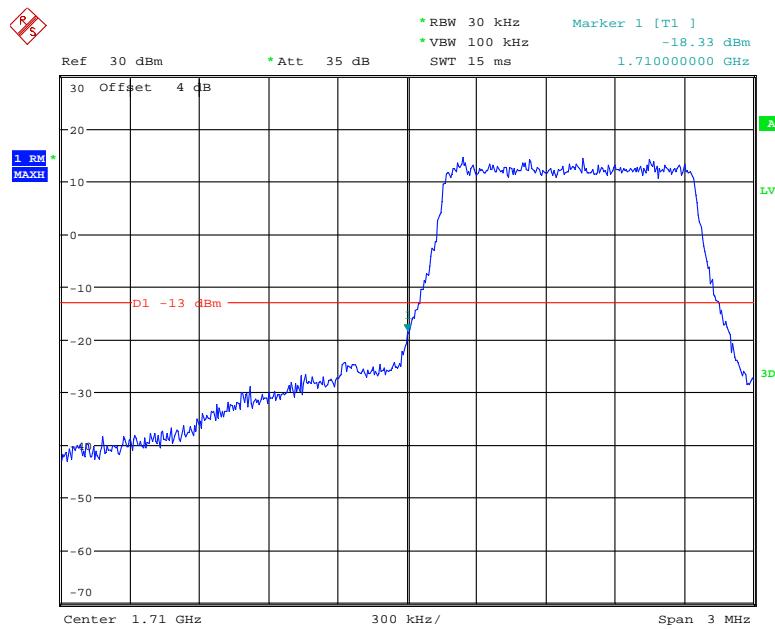
Date: 23.APR.2019 17:54:55

QPSK_20MHz_FULL RB_Left

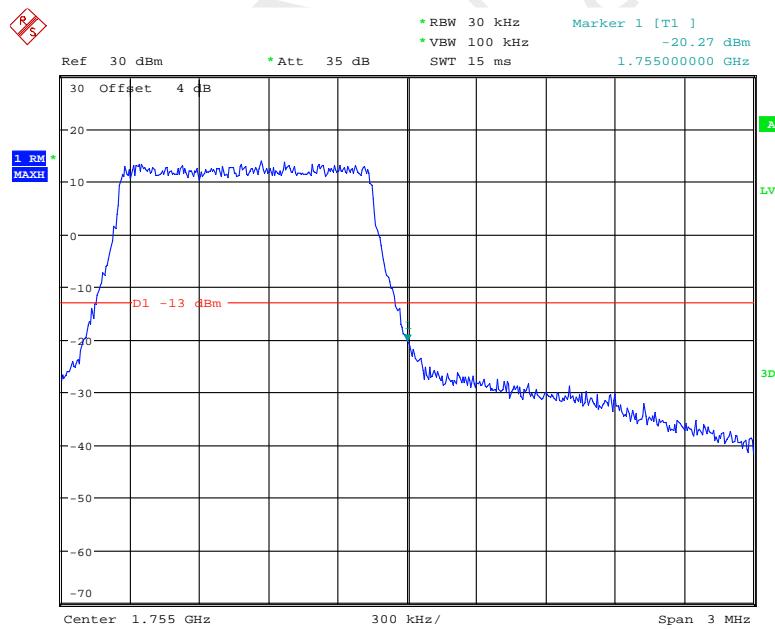
Date: 27.APR.2019 14:38:38

QPSK_20MHz_FULL RB_Right

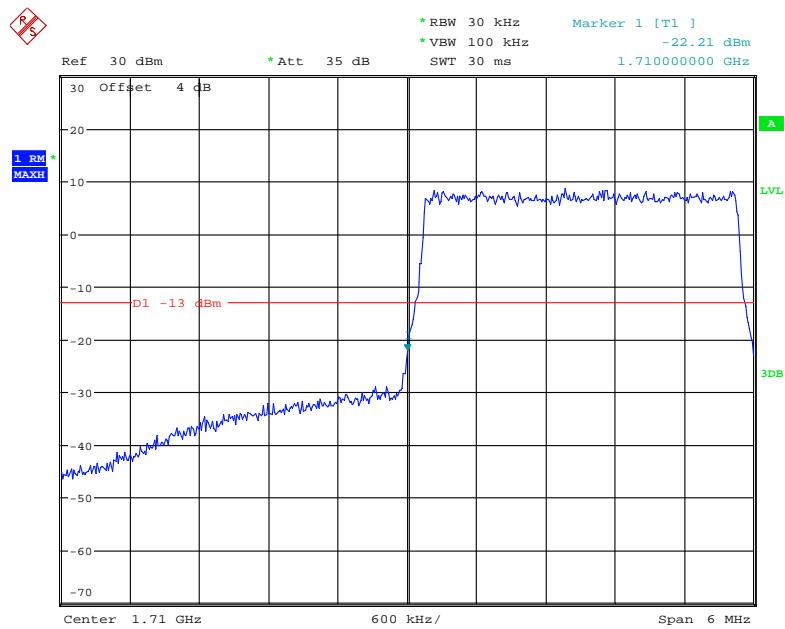
Date: 23.APR.2019 18:05:27

16QAM_1.4MHz_6 RB_Left

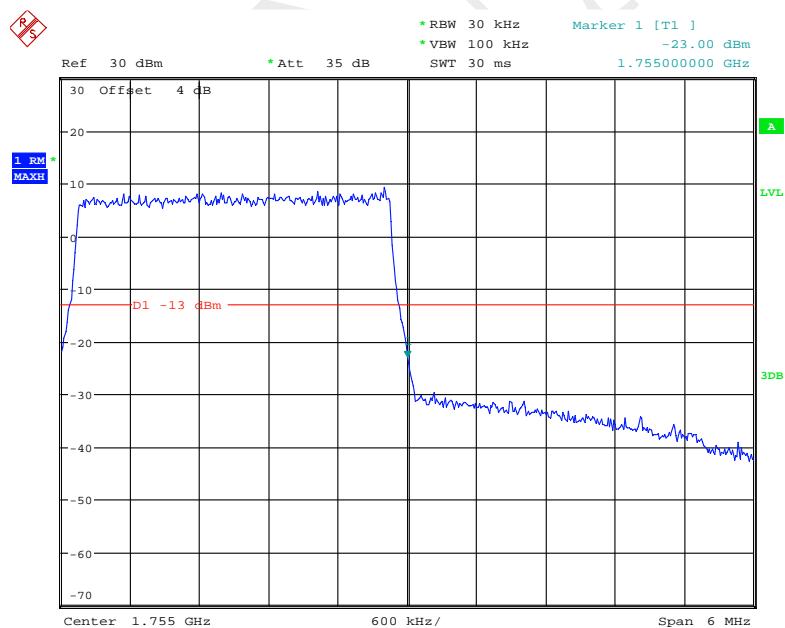
Date: 23.APR.2019 17:43:47

16QAM_1.4MHz_6 RB_Right

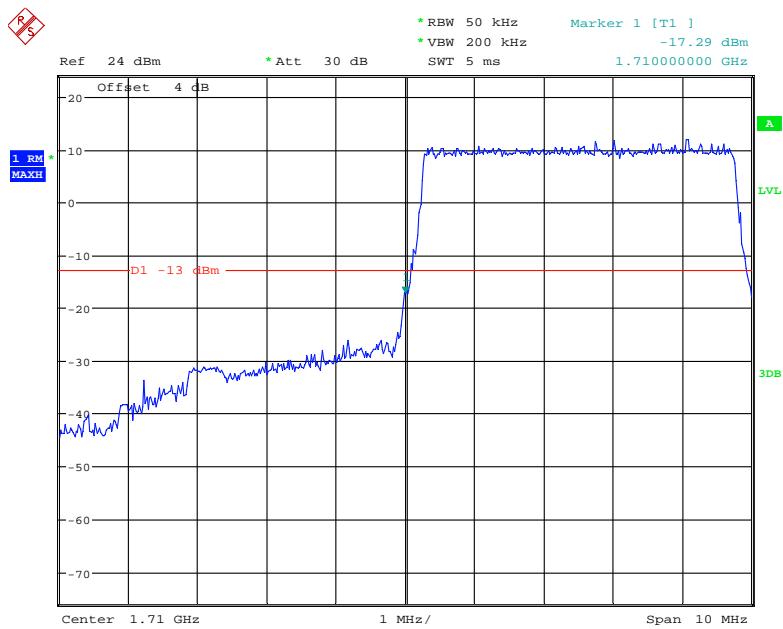
Date: 23.APR.2019 17:44:58

16QAM_3MHz_15 RB_Left

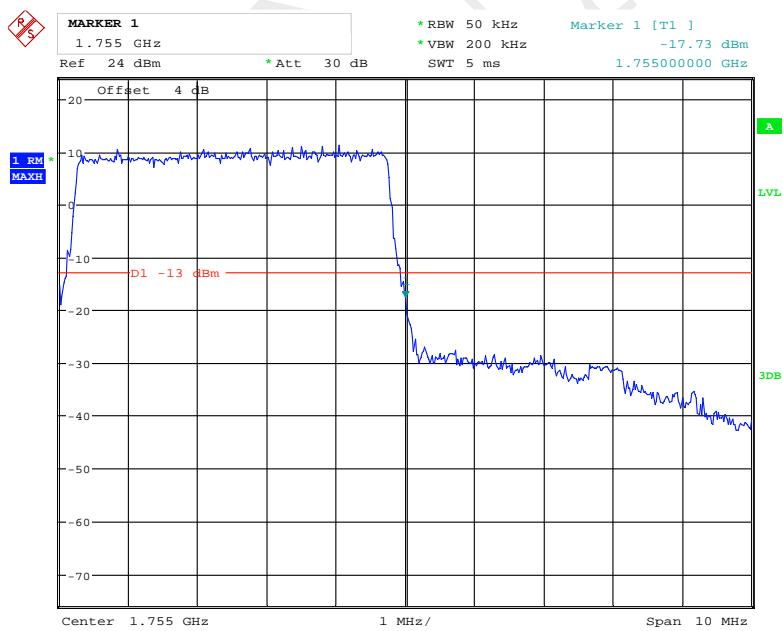
Date: 23.APR.2019 17:46:16

16QAM_3MHz_15 RB_Right

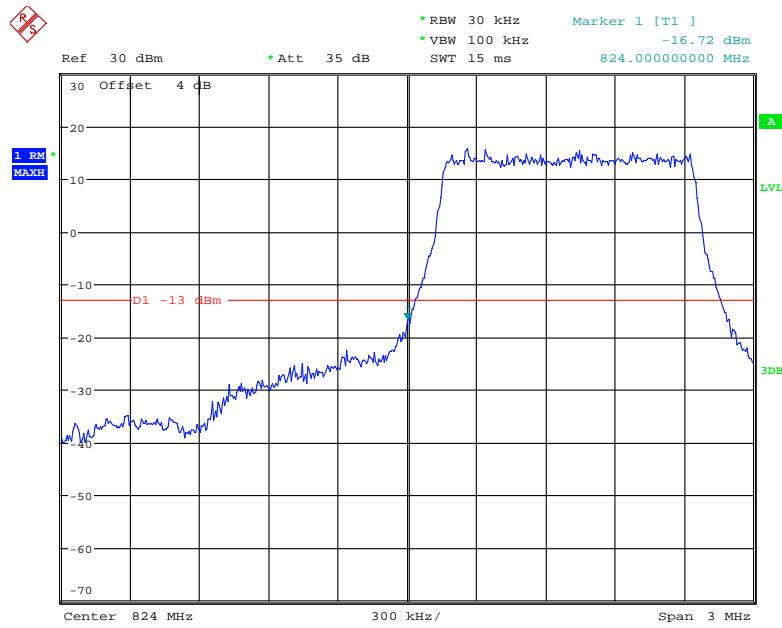
Date: 23.APR.2019 17:47:27

16QAM_5MHz_25 RB_Left

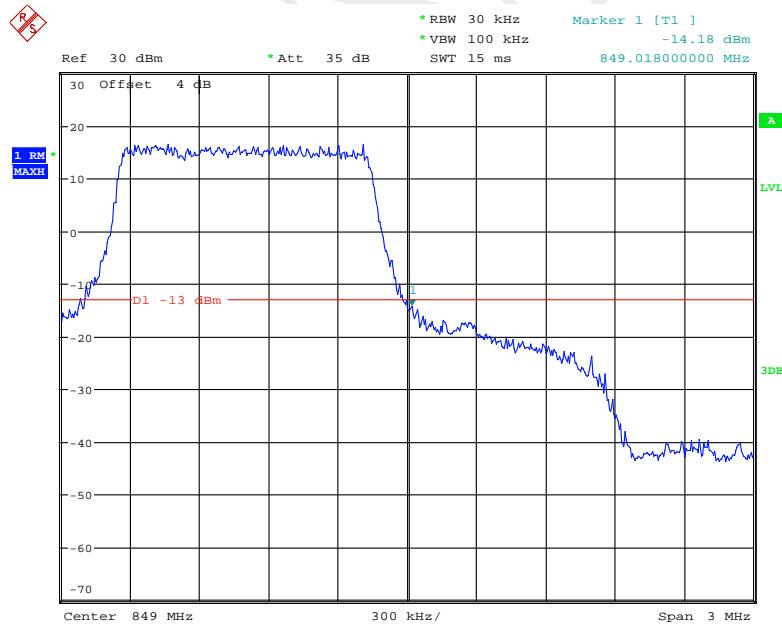
Date: 27.APR.2019 11:21:36

16QAM_5MHz_25 RB_Right

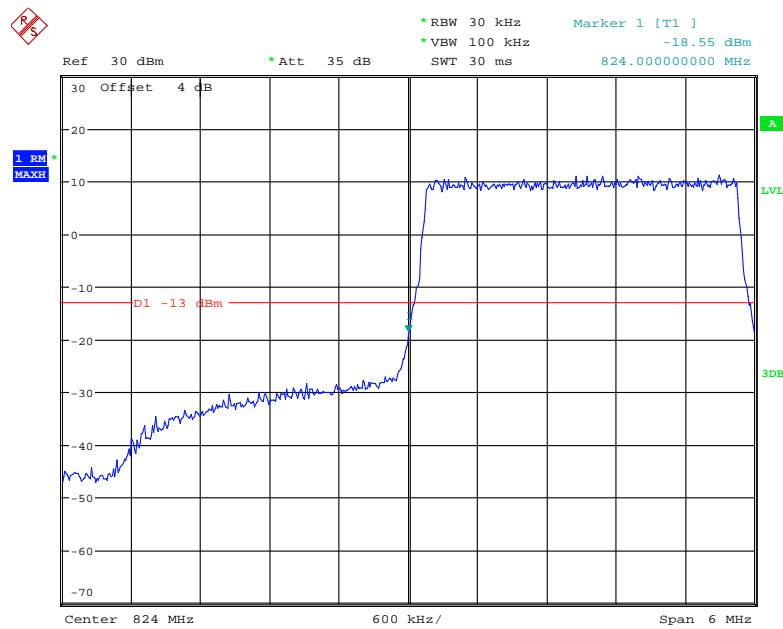
Date: 27.APR.2019 11:22:07

LTE Band 5**QPSK_1.4MHz_6 RB_Left**

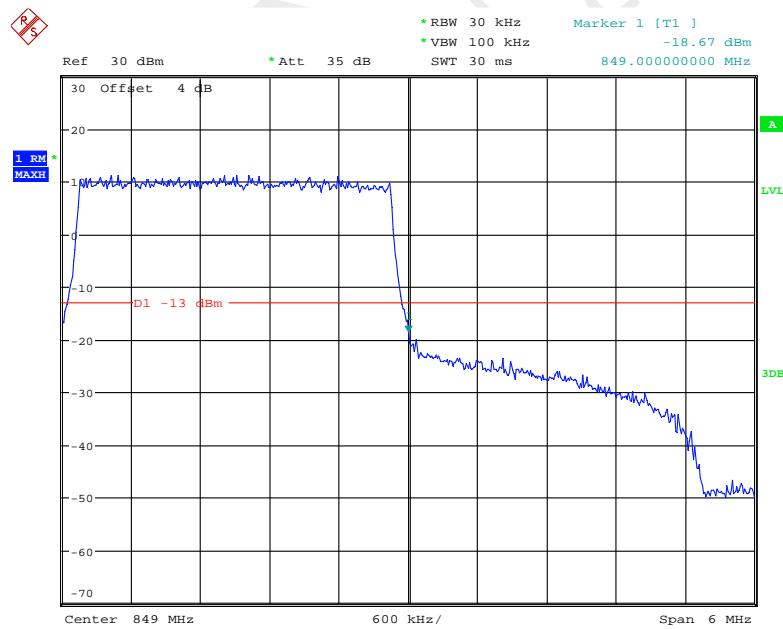
Date: 23.APR.2019 18:07:01

QPSK_1.4MHz_6 RB_Right

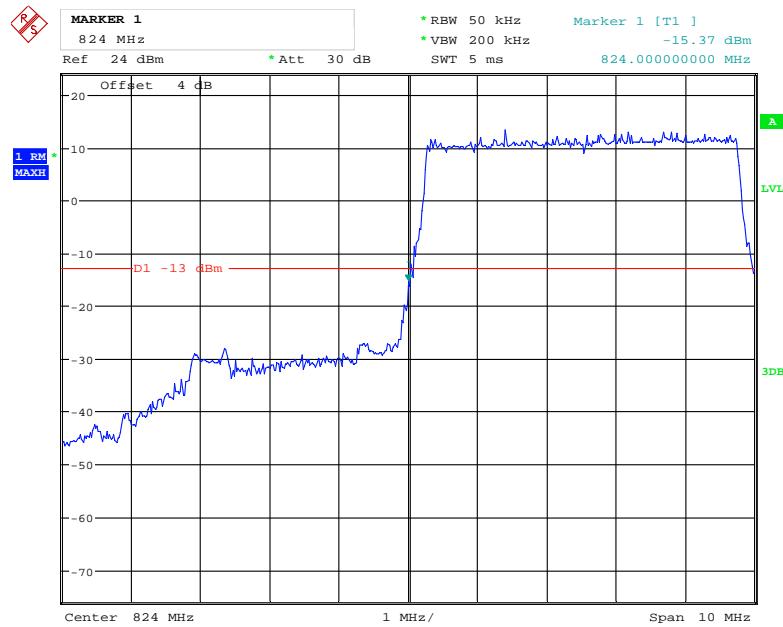
Date: 23.APR.2019 18:08:34

QPSK_3MHz_15 RB_Left

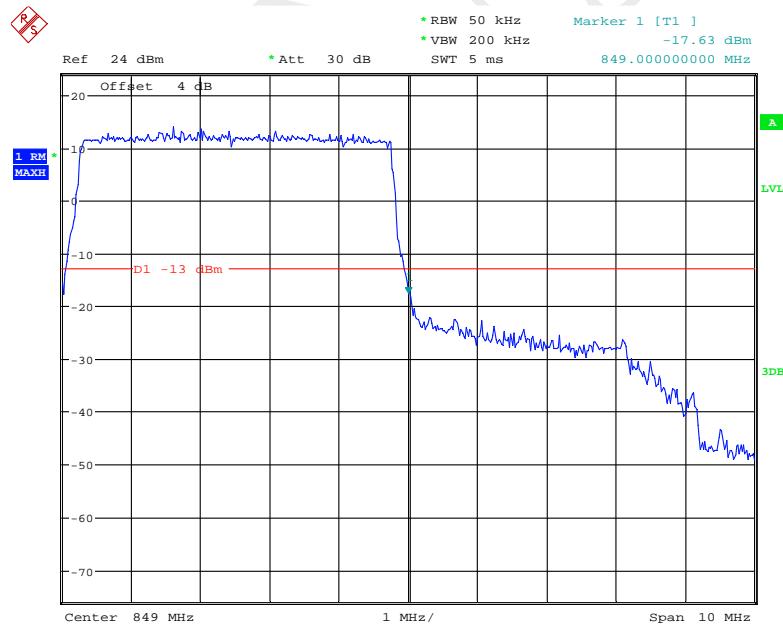
Date: 23.APR.2019 18:10:11

QPSK_3MHz_15 RB_Right

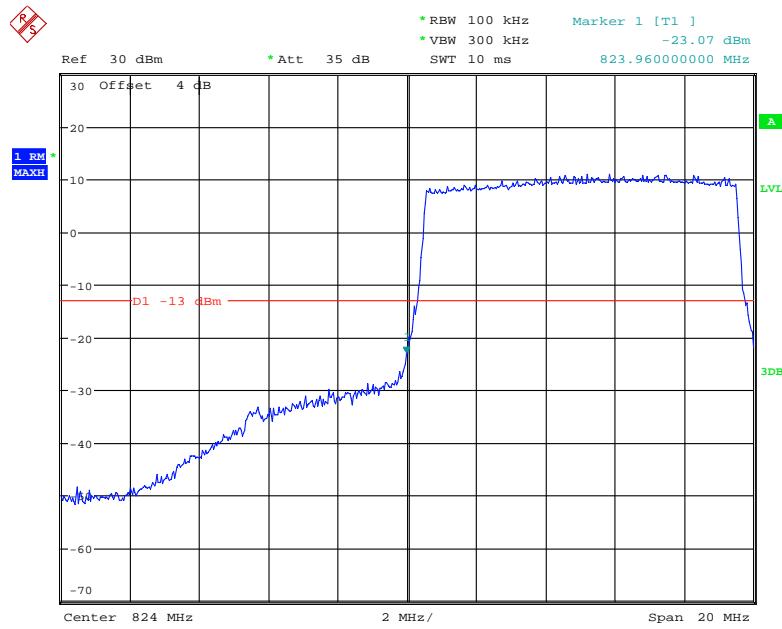
Date: 23.APR.2019 18:11:36

QPSK_5MHz_25 RB_Left

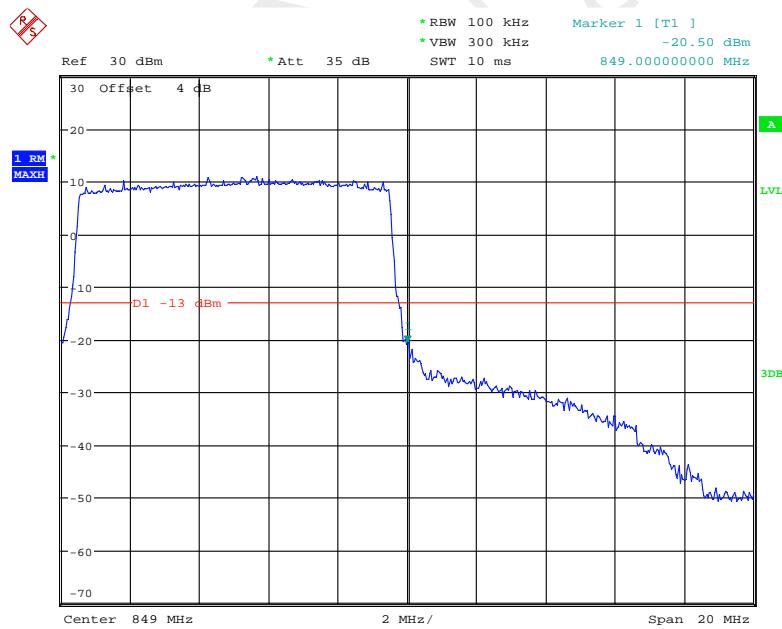
Date: 27.APR.2019 11:26:48

QPSK_5MHz_25 RB_Right

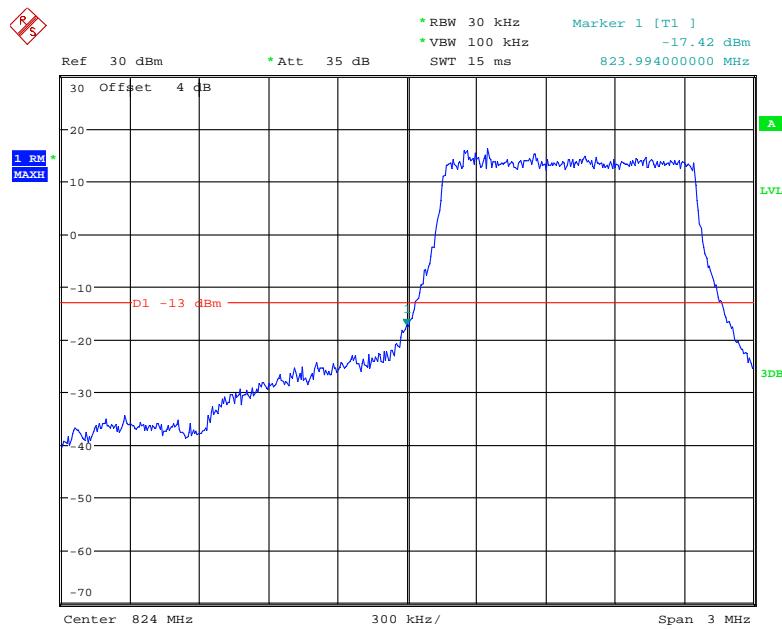
Date: 27.APR.2019 11:28:14

QPSK_10MHz_50 RB_Left

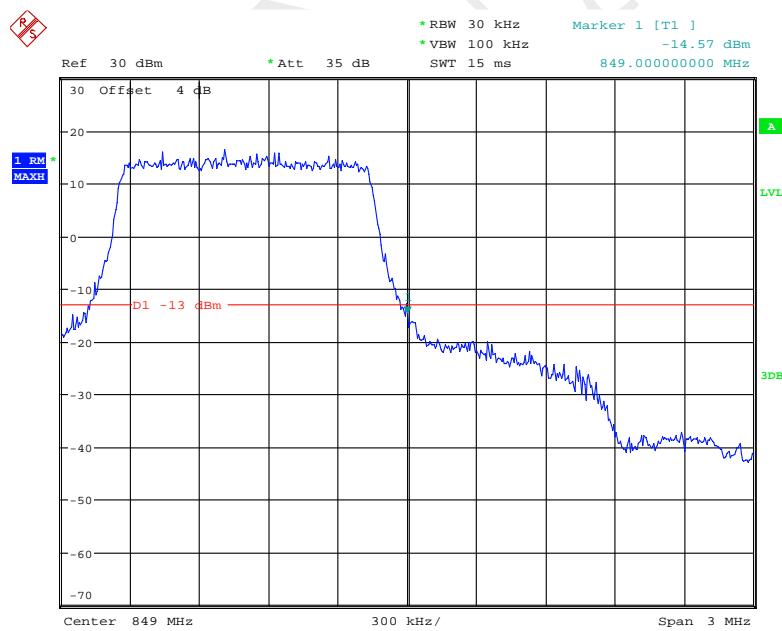
Date: 23.APR.2019 18:15:30

QPSK_10MHz_50 RB_Right

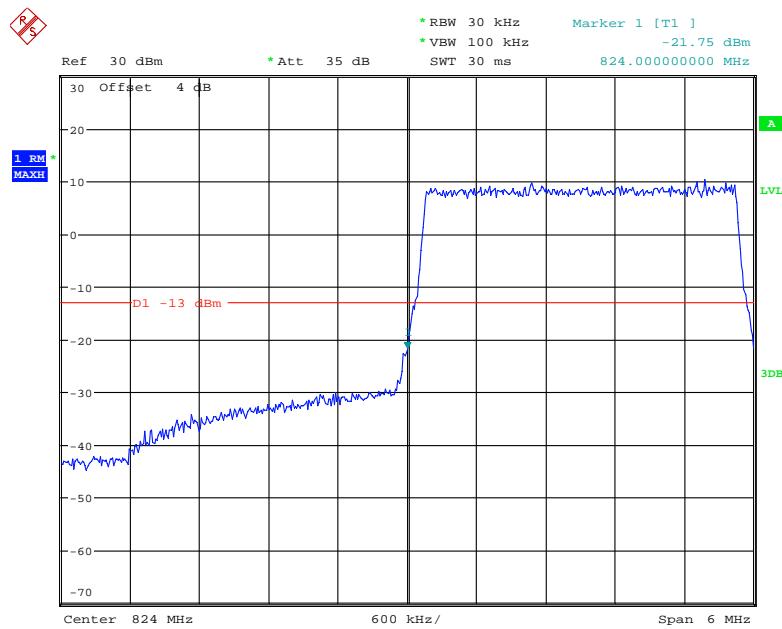
Date: 23.APR.2019 18:16:46

16QAM_1.4MHz_6 RB_Left

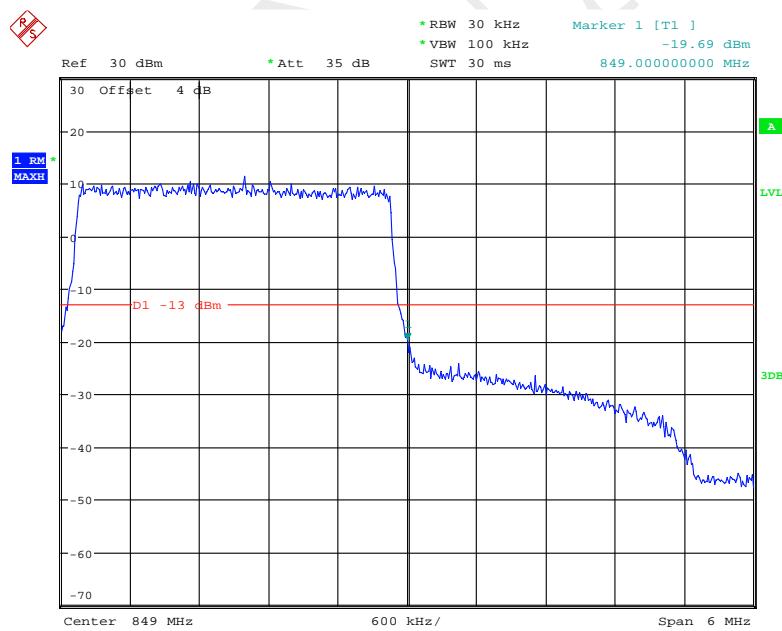
Date: 23.APR.2019 18:07:45

16QAM_1.4MHz_6 RB_Right

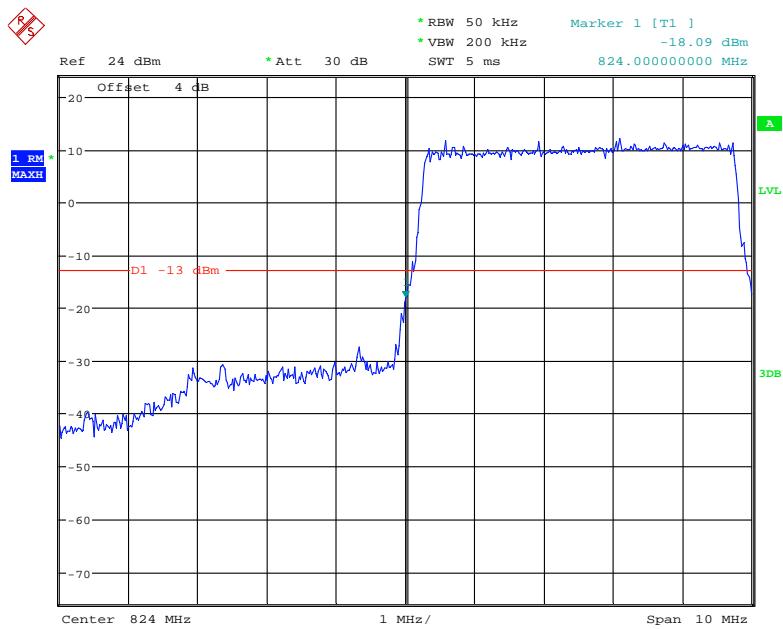
Date: 23.APR.2019 18:09:12

16QAM_3MHz_15 RB_Left

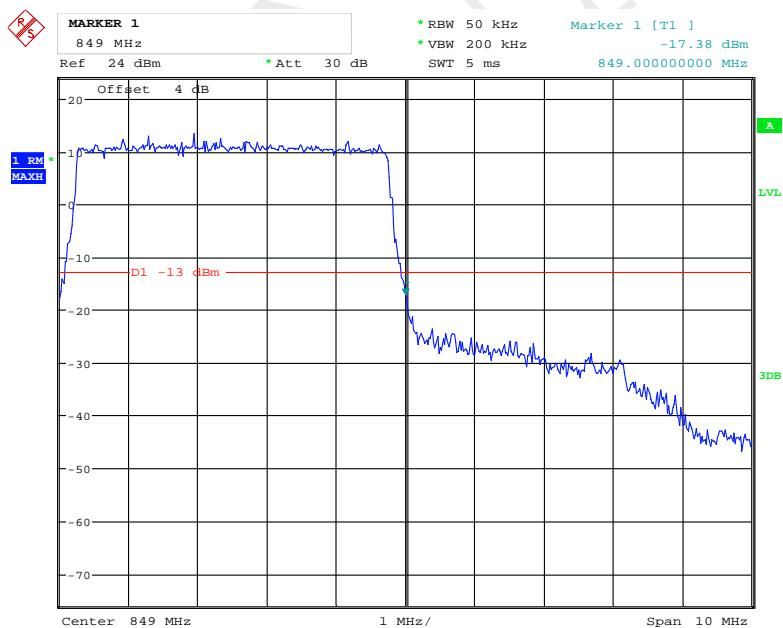
Date: 23.APR.2019 18:10:51

16QAM_3MHz_15 RB_Right

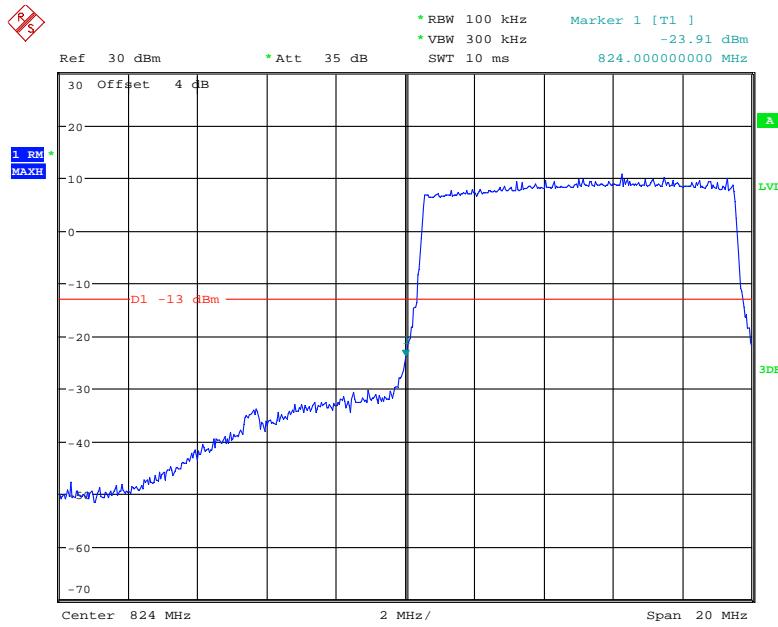
Date: 23.APR.2019 18:12:20

16QAM_5MHz_25 RB_Left

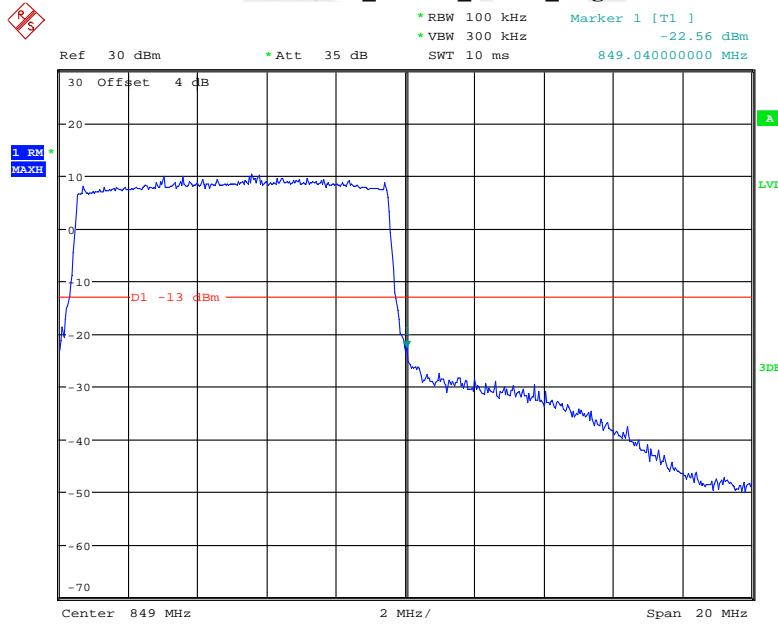
Date: 27.APR.2019 11:27:05

16QAM_5MHz_25 RB_Right

Date: 27.APR.2019 11:27:26

16QAM_10MHz_50 RB_Left

Date: 23.APR.2019 18:16:07

16QAM_10MHz_50 RB_Right

Date: 23.APR.2019 18:17:20

FCC §2.1055, §22.355 & §24.235 & §27.54- FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

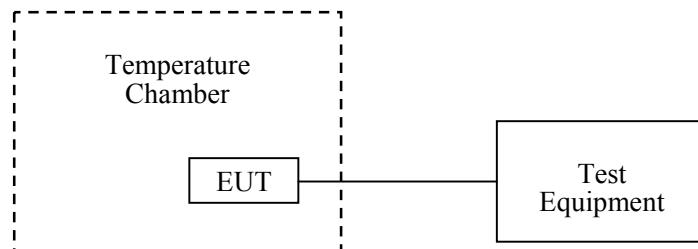
According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	2018-09-05	2019-09-05
R&S	Wideband Radio Communication Tester	CMW500	147473	2018-08-03	2019-08-03
R&S	Universal Radio Communication Tester	CMU200	106 891	2018/12/14	2019/12/14
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019/3/26	2020/3/26
UNI-T	Multimeter	UT39A	M130199938	2018-07-24	2019-07-24
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.1~27.2°C
Relative Humidity:	61~64%
ATM Pressure:	100.2~100.8 kPa

The testing was performed by Elena Lei from 2019-04-22 to 2019-04-26.

WCDMA Band II: R99

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	7.4	-5	-0.00266	Pass
-20		-3	-0.00160	
-10		-6	-0.00319	
0		-1	-0.00053	
10		-2	-0.00106	
20		0	0.00000	
30		-3	-0.00160	
40		-6	-0.00319	
50		-4	-0.00213	
20	6.6	-1	-0.00053	
20	8.4	1	0.00053	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limits
°C	V _{DC}	Hz	ppm	ppm
-30	7.4	4	0.00478	2.5
-20		3	0.00359	
-10		6	0.00717	
0		4	0.00478	
10		1	0.00120	
20		2	0.00239	
30		1	0.00120	
40		3	0.00359	
50		0	0.00000	
20	6.6	6	0.00717	
20	8.4	4	0.00478	

LTE Band 2:

QPSK, Channel Bandwidth:10MHz Middle Channel, f_c = 1880 MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	7.4	1.22	0.0006	Pass
-20		1.37	0.0007	
-10		1.20	0.0006	
0		1.18	0.0006	
10		1.29	0.0007	
20		-1.13	-0.0006	
30		1.30	0.0007	
40		1.30	0.0007	
50		1.30	0.0007	
20	6.6	1.19	0.0006	
20	8.4	1.17	0.0006	

16QAM, Channel Bandwidth:10MHz Middle Channel, f_c = 1880 MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	7.4	-3.62	-0.0019	Pass
-20		-3.61	-0.0019	
-10		-3.63	-0.0019	
0		-3.66	-0.0019	
10		-3.46	-0.0018	
20		-2.85	-0.0015	
30		-3.66	-0.0019	
40		-3.61	-0.0019	
50		-3.74	-0.002	
20	6.6	-3.67	-0.002	
20	8.4	-3.60	-0.0019	

LTE Band 4:

Temperature °C	Voltage V _{DC}	Test Result (MHz)		Limit (MHz)	
		F _L	F _H	F _L	F _H
-30	7.40	1710.51	1754.47	1710	1755
-20		1710.59	1754.53	1710	1755
-10		1710.58	1754.47	1710	1755
0		1710.52	1754.46	1710	1755
10		1710.53	1754.53	1710	1755
20		1710.54	1754.49	1710	1755
30		1710.54	1754.46	1710	1755
40		1710.55	1754.45	1710	1755
50		1710.61	1754.43	1710	1755
20		1710.60	1754.26	1710	1755
20		8.14	1710.53	1710	1755

Temperature °C	Voltage V _{DC}	Test Result (MHz)		Limit (MHz)	
		F _L	F _H	F _L	F _H
-30	7.40	1710.57	1754.45	1710	1755
-20		1710.54	1754.50	1710	1755
-10		1710.62	1754.47	1710	1755
0		1710.56	1754.46	1710	1755
10		1710.60	1754.41	1710	1755
20		1710.54	1754.49	1710	1755
30		1710.58	1754.47	1710	1755
40		1710.59	1754.45	1710	1755
50		1710.65	1754.55	1710	1755
20		1710.57	1754.26	1710	1755
20		8.14	1710.56	1710	1755

LTE Band 5:

QPSK, Middle Channel, $f_c = 836.5$ MHz, Channel Bandwidth:10MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	7.4	1.27	0.0015	2.5
-20		1.37	0.0016	
-10		-1.26	-0.0015	
0		1.26	0.0015	
10		1.15	0.0014	
20		-0.24	-0.0003	
30		1.54	0.0018	
40		1.34	0.0016	
50		-1.28	-0.0015	
20	6.6	1.10	0.0013	
20	8.4	1.17	0.0014	

16QAM, Middle Channel, $f_c = 836.5$ MHz, Channel Bandwidth:10MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	7.4	-1.24	-0.0015	2.5
-20		1.37	0.0016	
-10		1.24	0.0015	
0		1.30	0.0016	
10		1.15	0.0014	
20		-0.44	-0.0005	
30		1.30	0.0016	
40		1.38	0.0016	
50		-1.34	-0.0016	
20	6.6	1.16	0.0014	
20	8.4	-1.29	-0.0015	

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

***** END OF REPORT *****