

Luminar 6000 SERIES GAS LOG FIRE



Introducing the Luminar 6000 Gas Log Fire by Illusion, Australia's foremost manufacturer of Gas Log Fires. The Luminar 6000 features luxury, perfomance and wide viewing window making it the perfect choice to keep larger living areas warm.

Capable of heating up to 160 sq metres, the stunning Illusion Luminar 6000 Inbuilt Gas Log Fires are available in a range of colours including Metallic Black with several trim options designed to suit any decor.

Clever fascia design incorporates a drop down control panel cover and convenient operation switch allowing you to turn the appliance on or off quickly.

An optional remote control allows you to adjust the Luminar Gas Log Fire to suit your own comfort levels from the convenience of a cosy lounge chair.

Australia's Leading Gas Log Fire Manufacturer

CERTIFICATION

IAPMO-R&T **(**) OCEANA GasMark

Certificate Holder: Illusion Australia Ptv. Ltd.

145 South Gippsland Hwy. Dandenong South Vic 3175

ABN: 35005 834 784

A.G.Building Developments Pty. Ltd.

Certificate Number: GMK 10350 **Issue Date:** 21/7/2017

Distributor:	Brand Name:	Model ID:	Gas Type	MJ/h
ILLUSION	LLIMINIΔR	6000	ΝΔΤΙΙΡΔΙ	

All Illusion Luminar Gas Log Fires have been tested and approved to AS: 4558


Manufacturer:


Run Chaner

Chief Executive Officer of the IAPMO Group This GasMark Schedule supersedes all previously issued Schedules

53

DIMENSIONS

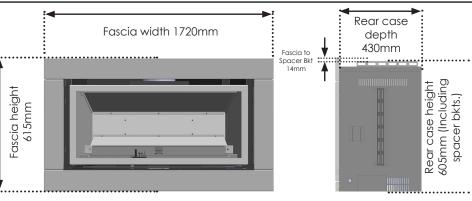

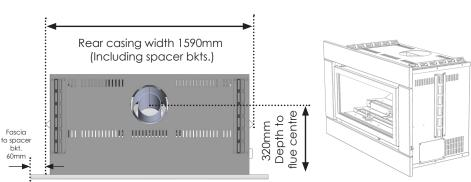

Please note: Luminar gas log fires can be installed as either wall mounted or floor mounted. The Flue system must be installed by an Authorised installer. Some installations may require the provision of a hearth to protect the floor from radiant heat. Contact your Illusion dealer for more information.



bkt.

The dimensions, etc quoted here are correct at the time of writing but may be subject to charge. The unique and dealer before commencing any building works or installations of these appliances. A slight reduction in performance may accept it is high politions. I large alass areas or lack of insulation are present. Ultimate reserves result if high ceilings, large glass areas or lack of insulation are present. Ultimate reserves the right to alter specifications without notice.

Photos are for illustrative purposes only. Some colours may vary due to the printing process.



FRAME CUTOUT


Luminar 6000 Frame and plaster cutout dimensions. NOTE: Minimum frame depth 450mm.

Example Floor mount shown below.

FLOOR MOUNT

The frame and plaster cutout dimensions as shown at right should be cut as accurately as possible to ensure adequate coverage by the appliance fascia. Illusion can supply fabricated full metal frames to simplify the installation and reduce costs.


Frame cutout size is 1610mm wide and 610mm high




WALL MOUNT

A Hearth is only required for the wall mounted version if the bottom of the fascia is closer than 300mm to the floor. The hearth must extend 150mm past either side of the fascia sides and must be constructed of non combustible materials.

Frame cutout size is 1610mm wide and 610mm high





INSTALLATION

