



3.5mm 4C Male to Male Cable - Riser Rated CMR/FT4

AUD-260-xx - Specifications

Description

This ultra slim 4C audio cable has a 3.5mm male on one end and a 3.5mm male on the other. It is typically used to connect audio devices such as iPods, MP3 players and smart phones to a 3.5mm headset with a microphone. The ultra slim connectors and cable are designed to be lightweight, durable and fit perfectly in mobile devices. They also work with most protective cases.

Physical Characteristics

| | |
|-----------------------|--------------------------|
| Connector Plating | Gold |
| Cable Diameter | 2.8mm |
| Wire Gauge | 28AWG |
| Jacket Material | PVC - Polyvinyl Chloride |
| Fire Rating | FT4 (Riser CMR) |
| Cable Shielding | 85% Bare Copper Spiral |
| Storage Temperature | -10 C to +70 C |
| Operating Temperature | 0 C to 45 C |

Connectors

| | |
|----------------------|---------------|
| Connector A | 3.5mm 4C Male |
| Connector B | 3.5mm 4C Male |
| Connector A Diameter | 7.6mm |
| Connector B Diameter | 7.6mm |

Approvals

| | |
|---------|-------------|
| c(UL)us | Yes - Cable |
|---------|-------------|

Environmental

| | |
|--------------------|-----|
| RoHS | Yes |
| Reach | Yes |
| Conflict Materials | Yes |

Package Information

| | |
|------------------|---|
| Package Quantity | 1 |
|------------------|---|

Warranty Information


| | |
|----------|------------------|
| Warranty | Limited Lifetime |
|----------|------------------|





3.5mm 4C Male to Male Cable - Riser Rated CMR/FT4

AUD-260-xx - Line Drawing

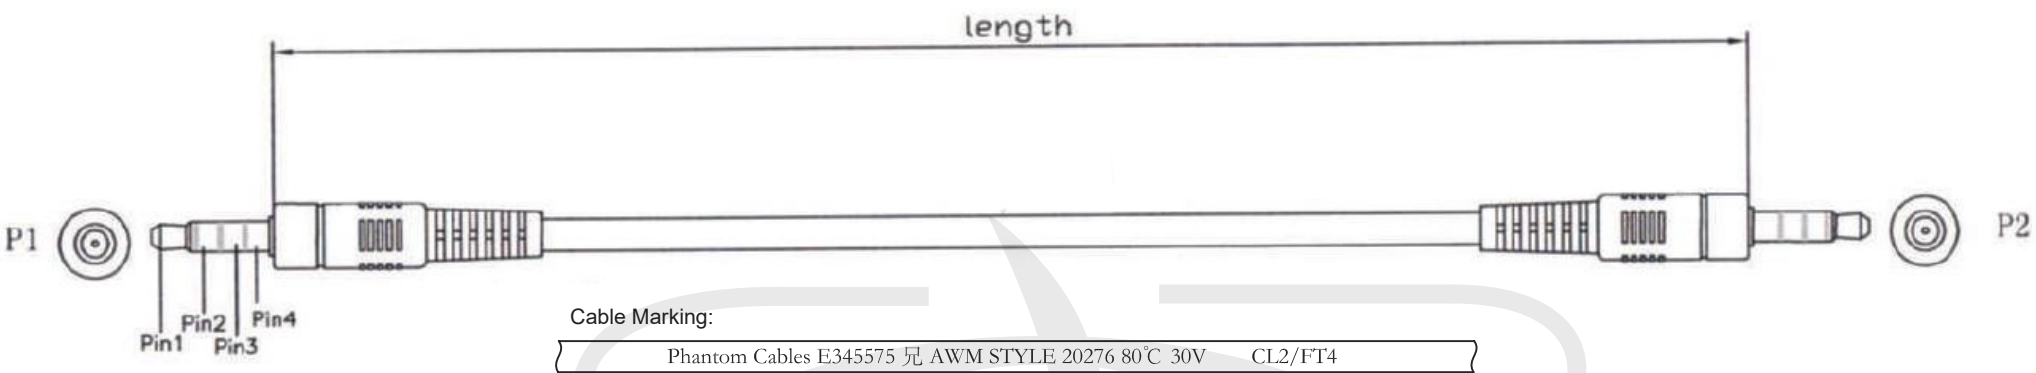

| P/N: | Length: |
|------------|-----------|
| AUD-260-01 | 305±15MM |
| AUD-260-02 | 610±15MM |
| AUD-260-03 | 915±20MM |
| AUD-260-06 | 1830±30MM |
| AUD-260-10 | 3050±40MM |
| AUD-260-15 | 4575±50MM |

| P1 | PIN OUT | P2 |
|----|---------|----|
| 1 | White | 1 |
| 2 | Red | 2 |
| 3 | Sp | 3 |
| 4 | Yellow | 4 |

