



OS2 Singlemode 9 Micron AFL (Corning) Duplex Fiber Zip Cord - 2mm Jacket - OFNP

Plenum Fiber Bulk Cable (per meter)



BK-F2Z-SMB-P - Specifications

Description

This cable is primarily used in the assembly of duplex fiber patch cords used in server rooms, data centers and other point to point indoor applications.

Physical Characteristics

Color	Yellow
Fiber Optic Type	Plenum Zipcord 2.0 Singlemode Duplex 9/125 micron
Fiber Core Diameter	9 micron \pm 2.0 micron
Nominal Diameter	2.0mm x 4.0mm
Tension(Installation)	22 lbs
Tension(Long Term)	7 lbs
Bending Radius(Installation)	2.0cm
Bending Radius(Long Term)	1.2cm
Operating Temperature	0°C ~ +70°C
Storage Temperature	-40°C ~ +75°C
Maximum Attenuation	0.5
Gigabit Ethernet Min. Link Distance	5,000M
10 Gigabit Ethernet Min. Link Distance	10,000M
Fire Rating	OFNP

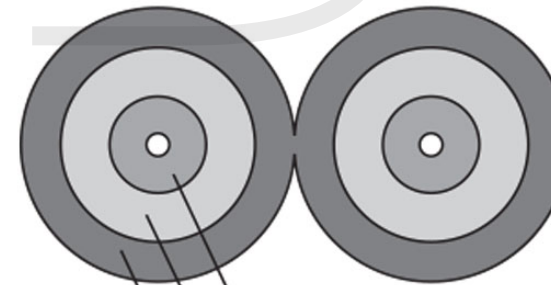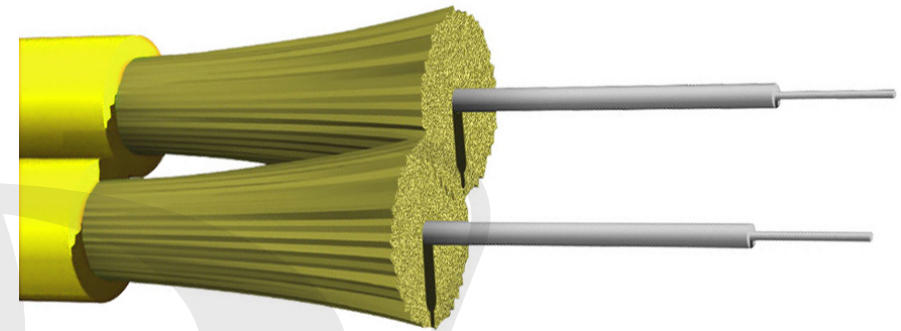

tight buffered fiber (900 μ m buffer)
aramid yarn
outer jacket

Certification(s)

ETL	Yes
c(ETL)	Yes

Product Support

RoHS	Yes
Country of Origin	USA

Packaging Information

Package Quantity	1
Product Weight	0.03 lbs [0.01 kg]