




RG6 18AWG Bare Copper 60% AL Braid + 100% Foil 75 Ohm CMR Bulk Cable

BK-RG641-BK - Specifications

Description

This bulk RG6 cable consists of a 18AWG solid center conductor. It is ideal for CATV video applications.

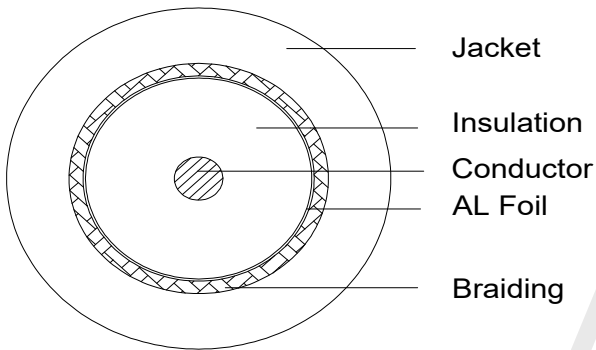

Physical Characteristics

Lengths Available	250 foot / 1000 foot [305m] Pull Box
Color	Black/White
Cable Diameter	6.90mm
Wire Gauge	18AWG
Inner Conductor	1/1.02mm Solid Bare Copper - Oxygen-Free
Insulation	4.57mm Foamed Polyethylene
Shield 1	Bonded Aluminum Foil
Shield 2	5*16*0.12mm 60% AL
Jacket Material	PVC - Polyvinyl Chloride
Jacket Rating	CMR/FT4 [Riser Rated]
Impedance	75±3Ω

Capacitance	54±3pF/m
Return Loss Operating	20dB Min
Temperature	-20°C ~ 75°C

Approvals

c(ETL)us	Yes
----------	-----

Environmental

RoHS	Yes
------	-----

Packaging Information

Package Quantity Cable	1 Pull Box
Length	1000ft 250ft
Product Weight	28.33 lbs 7.08 lbs



RG6 18AWG Bare Copper 60% AL Braid + 100% Foil 75 Ohm CMR Bulk Cable

BK-RG641-BK - Specifications

Attenuation: (20°C)

Frequency(MHz)	Max. (dB/100ft)	Max. (dB/100m)
50	1.50	4.9
100	2.00	6.5
200	2.80	9.2
400	4.10	13.6
700	5.60	18.4
900	6.20	20.3
1000	6.50	21.4
1450	8.00	26.2
1800	8.50	27.9
2100	9.50	31.1
2250	10.00	34.0
3000	11.40	37.5

Printing:

RG6/U 18AWG BC 3GHz CMR/FT4 C(ETL)US 5019640 RoHS XX/XX/XX 0002FT-----1000FT