



RJ45 Cat6 Slim Profile 180 Degree Jack, 110 Punch-Down

JK-C6PB-xx - Specifications

Description

This keystone insert consists of a RJ45 Cat6 slim profile 180 degree jack female on one end and a standard 110 punch down on the other end. It fits into a standard keystone opening and used to terminate bulk Cat6 UTP cable.

Physical Characteristics

Color	Black/ Blue /White
Connector Plating	Nickel
Size	Standard Keystone

Connectors

Front	RJ45 Cat6 Female
Back	Standard 110 Terminate

Environmental


RoHS	Yes
------	-----


Packaging Information

Package Quantity	1
Product Weight	0.05 lbs [0.02 kg]

Contents

Included in Package	1 Insert
---------------------	----------

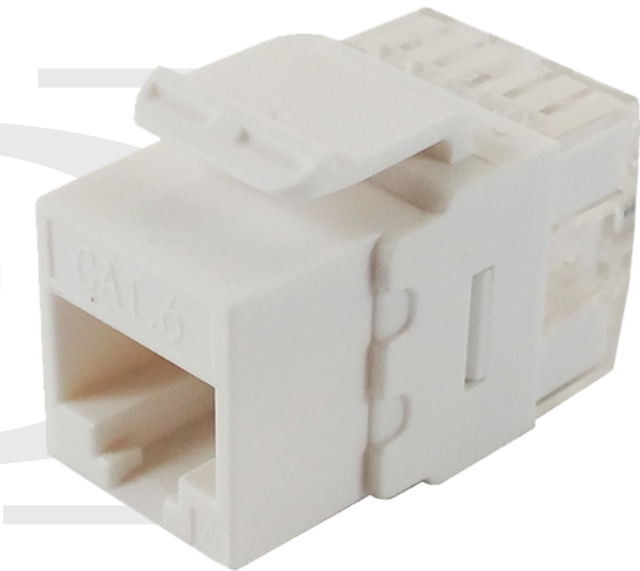

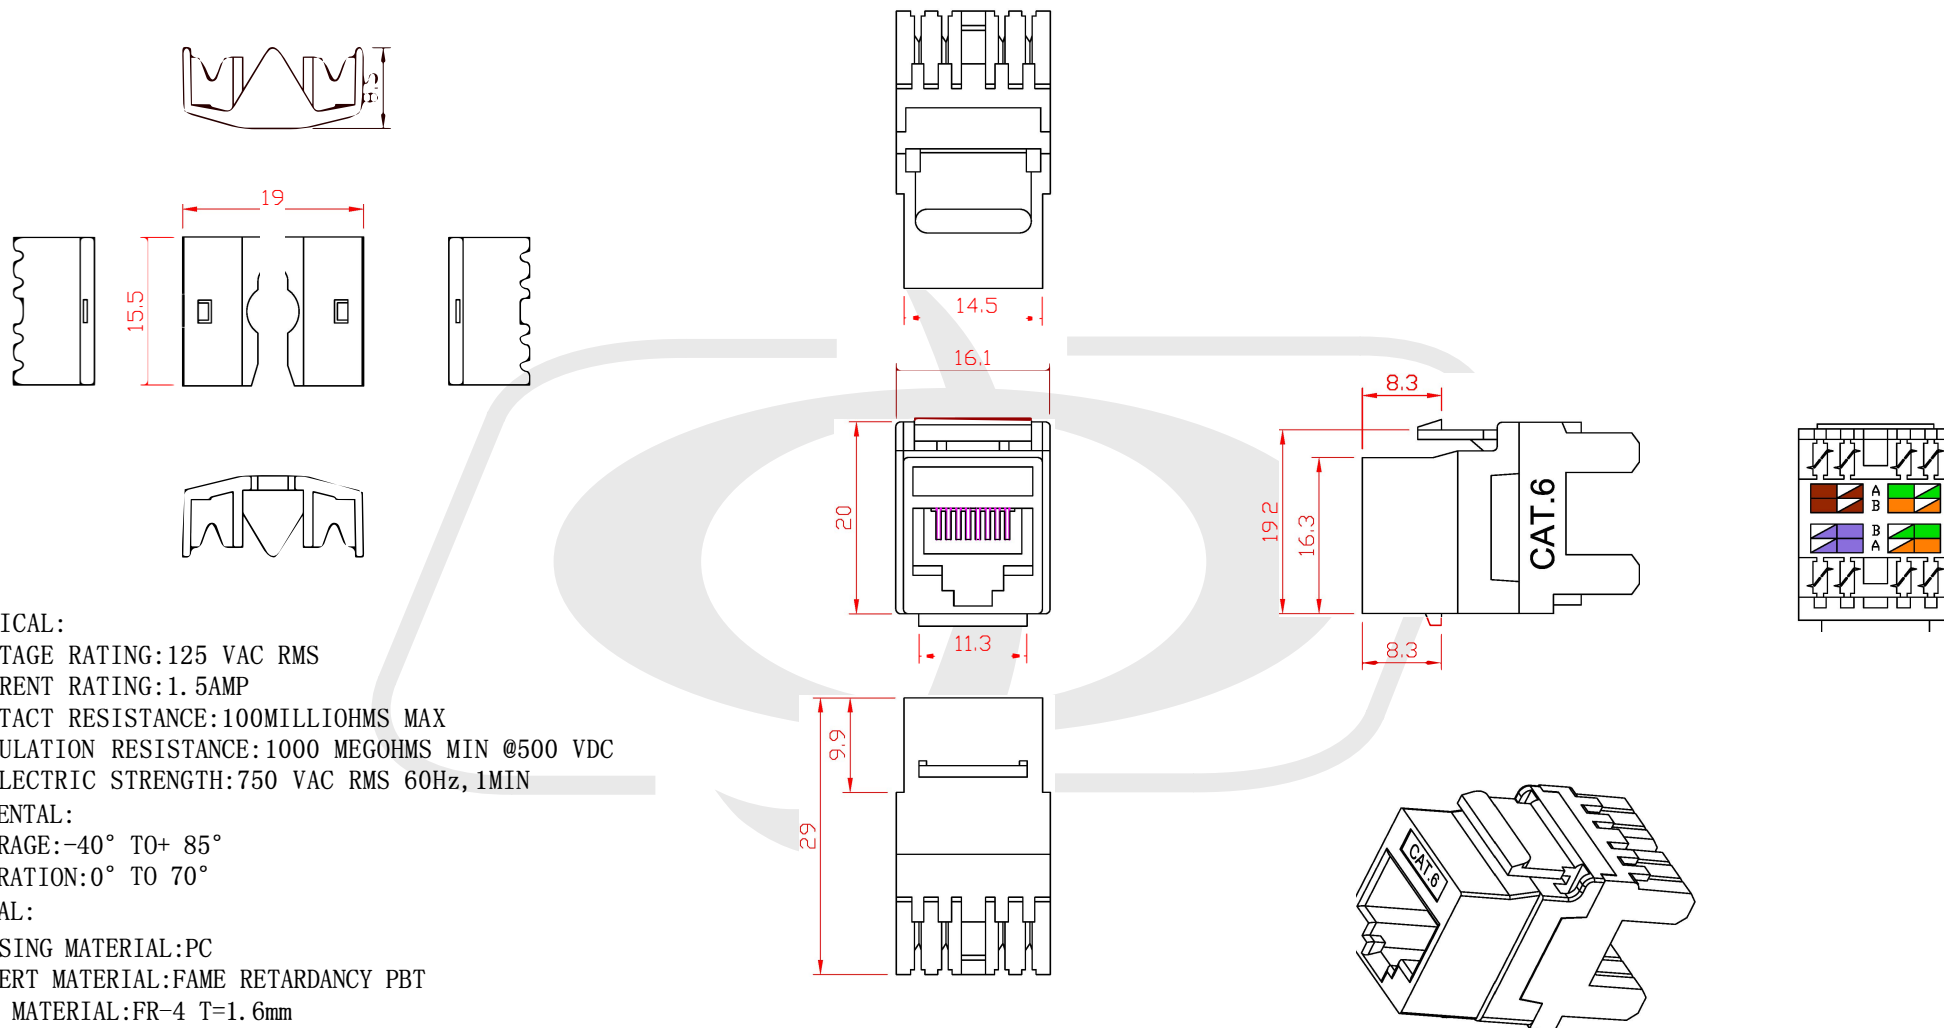

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1 MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO + 85°
2. OPERATION: 0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL: PC
2. INSERT MATERIAL: FAME RETARDANCY PBT
3. PCB MATERIAL: FR-4 T=1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
6. RJ45 JACK ; LIFE: 750 FTIMES MIN
7. IDC LIFE: 200 FTIMES MIN
8. WIRE: AWG 22-26