Description

This 12 port Cat5e self mount patch panel has RJ45 female ports on the front and 110 punch-down style terminals on the rear. It is meant to be mounted on a wall and provides an easy method to terminate raw Cat5e runs.

Physical Characteristics

Color	Black
Connector Type	Cat5e
Color Code	568A or 568B
Ports	12
Product Dimensions	12" W x 1.75" H [30 cm W x 4.45 cm H]
Rackmountable	No, Meant to be Wall Mounted

Connectors

Front	12 - RJ45 CAT5e Female
Rear	12 x 4 Pair - 110 Style Punch-Down Terminations

Environmental

RoHS	Yes

Packaging Information

Package Quantity	1 - Patch Panel
	2 - Screws
	1 - Wall Mount Clip
Product Weight	0.85 lbs [0.39 kg]

PHANTOM CABLES

IDC
110 & Krone tool compatible

RJ45
TOP ENTRY JACK

254±0.3

82±0.3

57.4±0.3

CAT5e

1 2 3 4 5 6   7 8 9 10 11 12

47.3±0.3

38.2±0.3
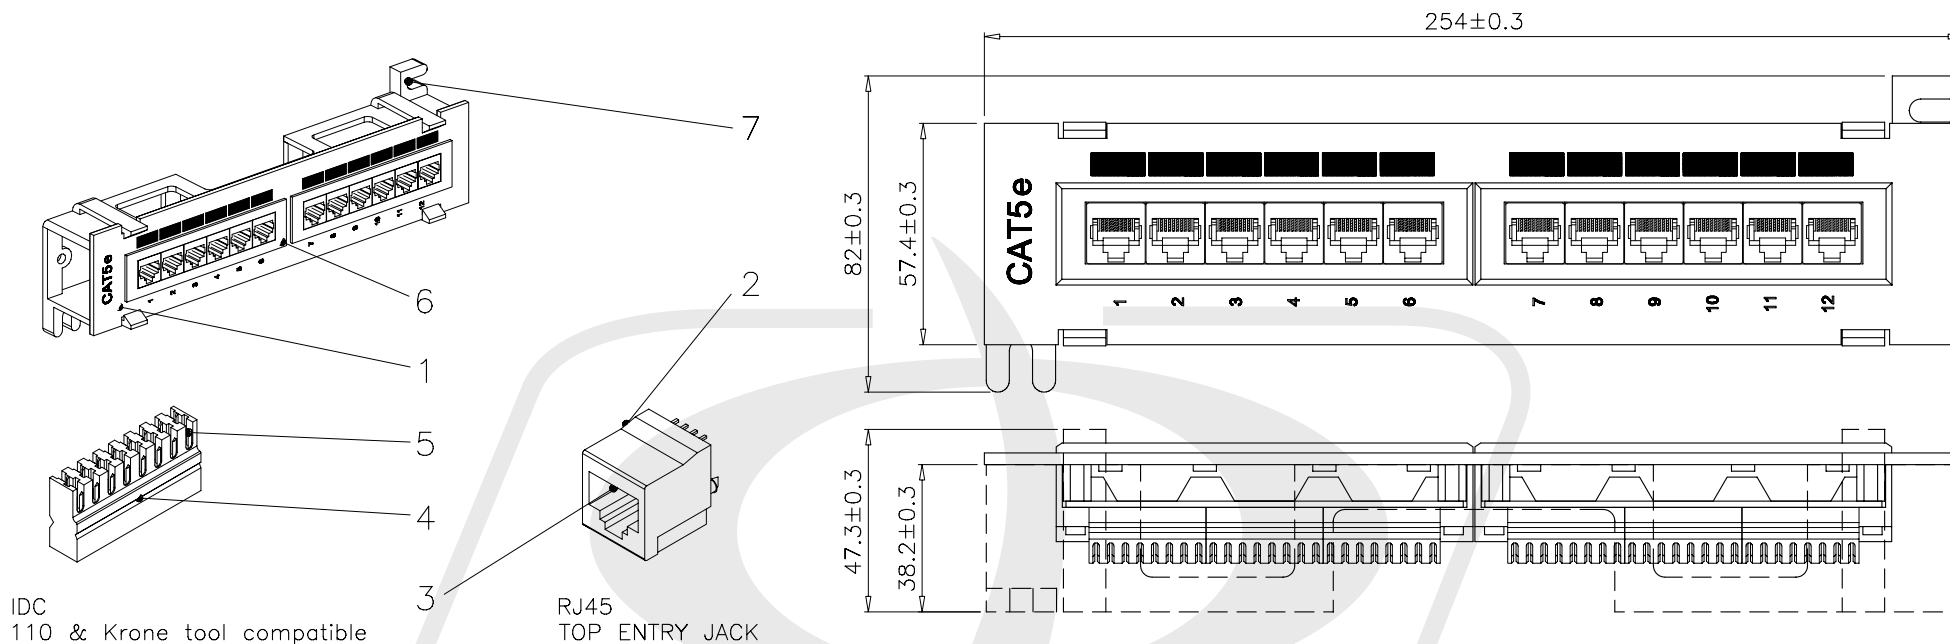
Specification:

Material :
1. Panel : 3.0 m/m SPCC with Black color painting.
2. RJ45 Housing : PBT, UL 94V-0.
3. RJ45 Contact material & finished :
   3-1. Phosphor Bronze with 50-60 micro-inch Nickel plated.
   3-2. Contact area : Min. 3 mm 50 micro-inch Gold plated.
4. IDC Housing : PC, UL 94V-2.
5. IDC Terminal material & finished :
   5-1. Phosphor Bronze with 50 micro-inch Tin-Lead plated
        over 50-60 micro-inch Nickel plated.
   5-2. 110 & Krone tool compatible.
   5-3. Use for 22-26 AWG stranded and solid wire.
6. Jack Bracket Set : ABS UL 94V-0, Black color.
7. Panel Bracket : ABS UL 94V-0.

5 4 1 2 3 6 7 8

3P
THIRD PARTY TESTING   C5e
CERTIFIED

1

8B

2

5 4 1 2 3 6 7 8