



24-Port Angled CAT6 Shielded Patch Panel, 19" Rackmount 1U - Pass-Through

PP-24C6S-APT - Specifications

Description

This 24 port Cat6 1U shielded patch panel has RJ45 female to female feed-through keystone couplers on both ends. It is meant to be mounted on a 19" rack or cabinet and provides an easy method to couple Cat6 patch cables.

Physical Characteristics

Color	Black (Powder Coat)
Material	Steel
Connector Type	CAT6 Shielded
Ports	24
Rack Space	1U
Product Dimensions	19" W x 3.5" H [48 cm W x 8.9 cm H]
Rackmountable	Yes
Cable Management	Yes

Connectors

Front	24 - RJ45 CAT6 Female
Rear	24 - RJ45 CAT6 Female

Environmental


RoHS	Yes
------	-----

Packaging Information

Package Quantity	1 - Patch Panel
Product Weight	2.5 lbs [1.13 kg]




Built from components:
PP-24KAS-1U
JK-C6-FFS

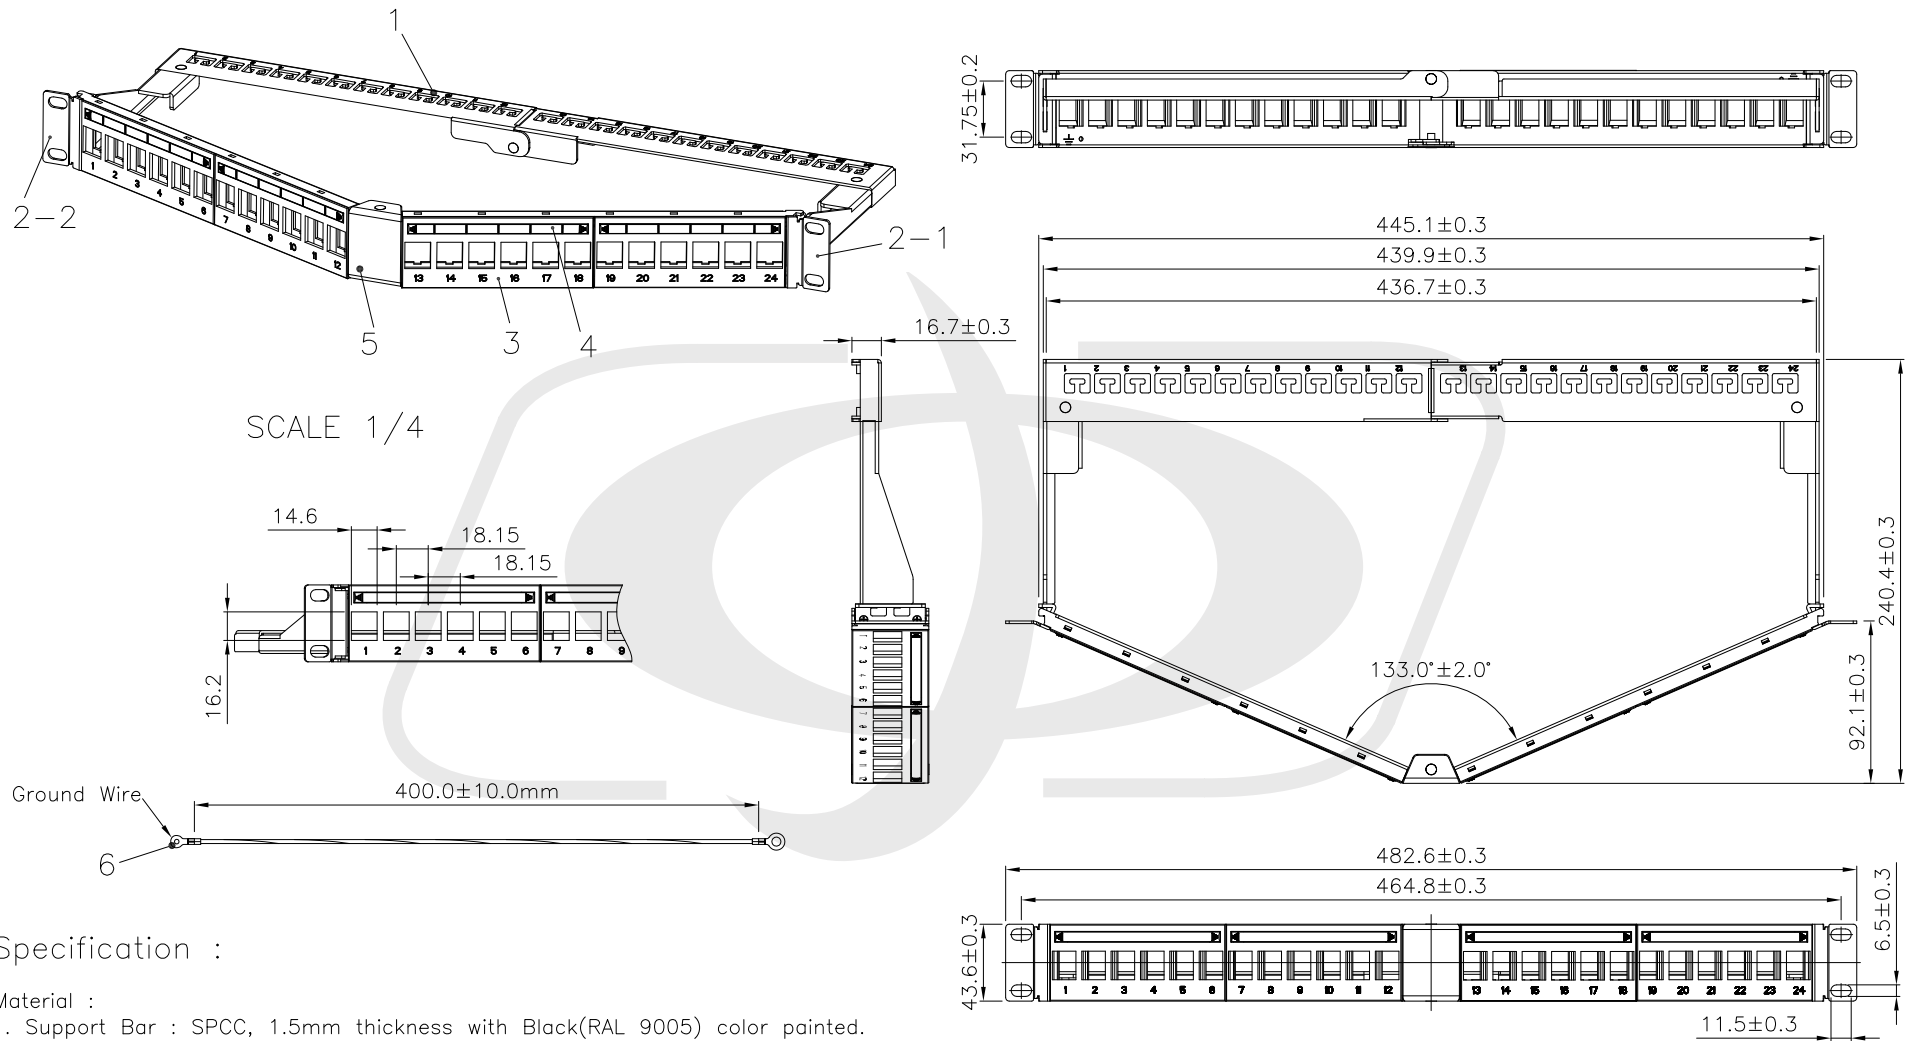

Specification :

Material :

1. Support Bar : SPCC, 1.5mm thickness with Black(RAL 9005) color painted.
2. Rear Panel :
2-1 Rear Panel: SPCC, 1.5mm thickness with Nickel plated.
2-2 Front Plate Edge: Black (RAL 9005) color painted after Nickel-plated for both side.
3. Front Plate : ABS, UL 94-HB.
4. Identification :
4-1. Paper.
4-2. I.D. Plate : PC, UL 94V-0.
5. Middle-sheet : SPCC, 1.5mm thickness with Black(RAL 9005) color painted.
6. Ground Wire : 18 AWG Wire, with Green/Yellow striped color, length 40 cm.

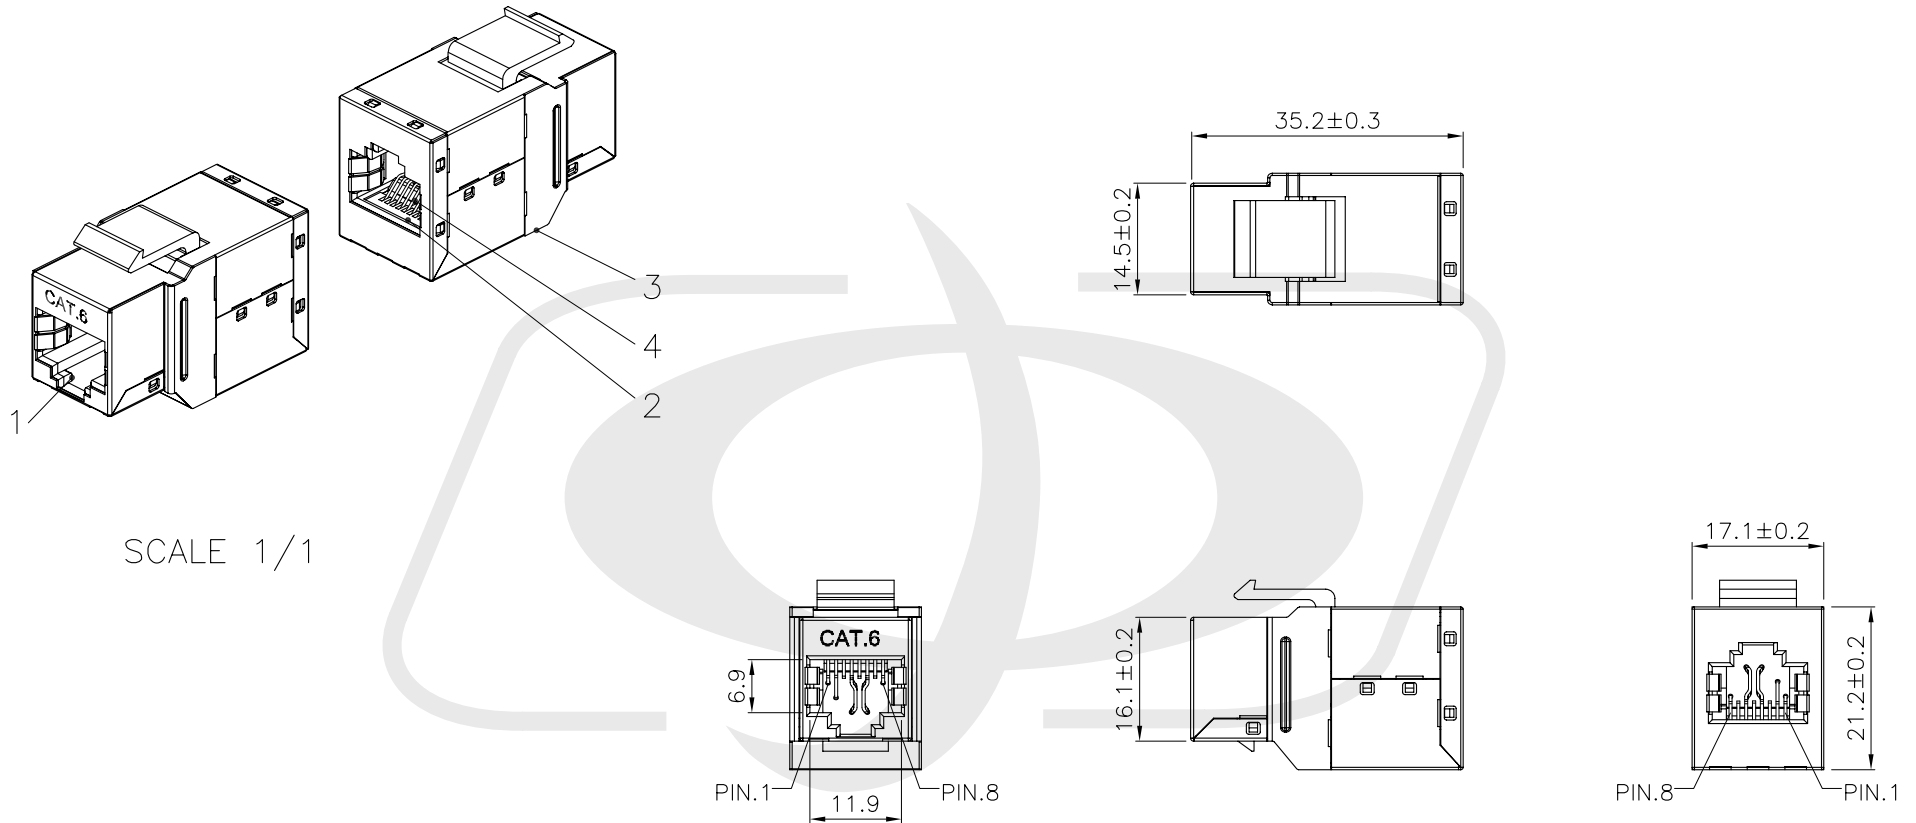

SCALE 1/1

Specification :

Material :

1. RJ45 Jack Housing : ABS+PC, UL 94V-0, with Black color.
2. Contact Bracket : PC, UL 94V-2, Transparent color.
3. RJ45 Jack Shield : Bronze with Nickel plated.
4. RJ45 Jack Contact :
 - 4-1. Material : Phosphor Bronze with Nickel plated.
 - 4-2. Finish : 50 micro-inch Gold plated on Plug contact area.
5. PCB : FR4, UL 94V-0.