




Deckenleuchten | 322 stripLED 57.5 W DC 24 V
CRI 90
65384W00



Technische Daten	
Typ	Oberfläche
Installationsposition	Wand - Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	General Lighting
Light emission direction	internal
Lampe Nennleistung	57.5 W DC
Lichtstrom (Lichtquelle)	6000 lm
Frequency	50-60 Hz
Ähnlichste Farbtemperatur / Tone	3000 K
Farbwiedergabeindex	90 Ra
Gleichstrom/Gleichspannung	CV
Isolierklasse	3
IP	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Einschließlich Driver	Nein
Leuchte dimmbar	DALI - 1-10V
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein
Typ Lichtabstrahlung	Einflammig
Nettogewicht	7 Kg
Schutz vor elektrostatischen Entladungen	Nein
Schutz vor Stoßspannungen	Nein
Optiktechnologie	Dot free

Oberfläche Gehäuse	
Material	Aluminium 6060
Farbe	Bronze
Bearbeitungstyp	Flüssiglackierung

Oberfläche Diffusor	
Material	Polycarbonat UV-beständige
Farbe	Opal

Elektronik	
	99332 1-10V Controller
	99374 On/Off Driver 198-264V AC / 185-275V DC 75 W
	99722 DALI Controller
	83062 DALI - Push and Simply Dim Controller 198-264V AC / 176-280V DC 150 W
	83018 N/O button On/Off Driver 198-264V AC / 180-275V DC 75 W

Deckenleuchten | 322 stripLED 57.5 W DC 24 V | CRI 90 65384W00

Single emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 322 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 6000 lm, with a 104.3 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a bronze finish, processed by means of liquid painting; the diffuser is made of uv resistant polycarbonate. The ingress protection degree is IP40; the total weight is of 7 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 57.5 W.

The device features protection class III and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F.

Illuminotechnical Eigenschaften

Light Output Ratio (LOR)	39 %
Lichtstrom (Lichtquelle)	6000 lm
Leuchten Lichtstrom	2369 lm
Consumption	58 W
Leuchten Lichtausbeute	40 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	2 Step MacAdam
Farbwiedergabeindex	90 Ra
Standardumgebungstemperatur	-20 / +50 °C

LED Life / Failure Ratio


L70 B20 C0 70000h (at Tj 65 Ta 25)

UGR

UGR axial	13.7
UGR transversal	13.7
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Light distribution symmetry	Symmetrical
Optik C0/C180	174°

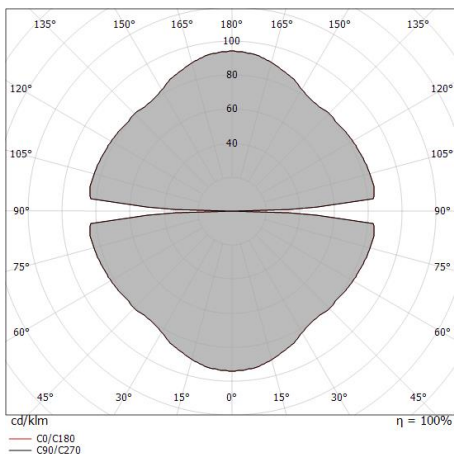


Distance [m]	Cone diameter [m]	Illuminance [lx]	E(0°) E(C0)	87.1°	892 0
0.5	19.74		E(0°) E(C0)	87.1°	223 0
1.0	39.48		E(0°) E(C0)	87.1°	99 0
1.5	59.22		E(0°) E(C0)	87.1°	56 0
2.0	78.96		E(0°) E(C0)	87.1°	36 0
2.5	98.70		E(0°) E(C0)	87.1°	25 0
3.0	118.44		E(0°) E(C0)	87.1°	

Distance [m] Cone diameter [m] Illuminance [lx]
— C0/C180 (Half-peak divergence: 174.2°)



Tour_CI | Ceiling Lights | Accessories
65384W00



Distanzstück-Kit für Tour_C

Material:Aluminium 6026, farbe:Bronze, bearbeitungstyp :Flüssiglackierung.

Code

65390