



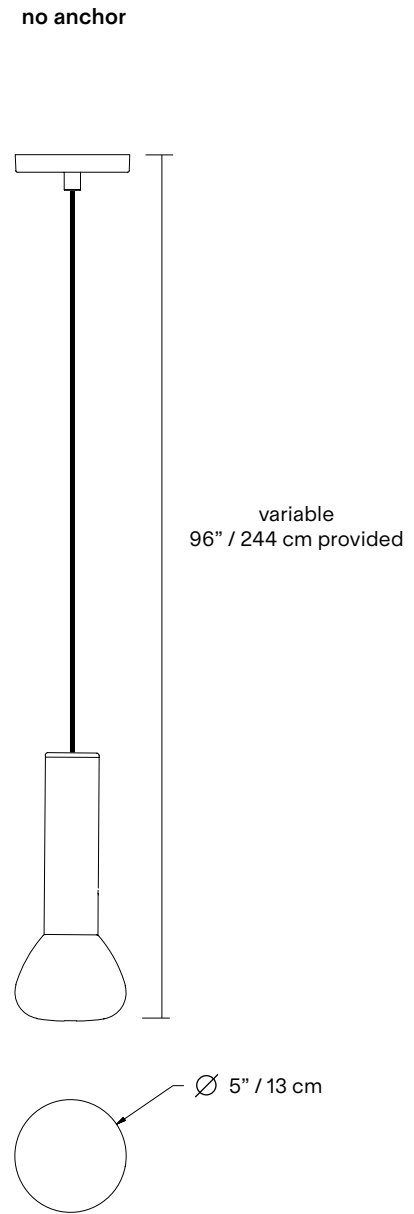
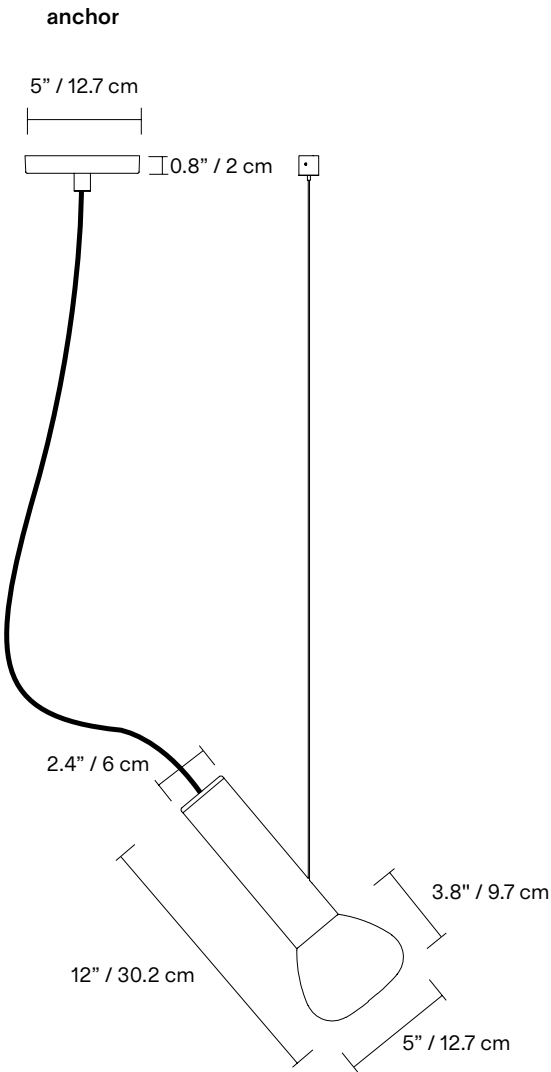


PARC 02



Parc is a collection inspired by childhood imagination and the essentiality of homemade forms — created in collaboration with Swiss designer Adrien Rovero. Evoking the archetype of a flashlight, each lamp of the Parc Collection is a playful reminder of time spent in nature, when a simple tube and piece of string could be used to fashion any number of creations. These makeshift things, at once naive and functional, harness the unique beauty of peeling an object back to its essence.

| | |
|------------------------------|--|
| TYPE | Pendant |
| CONSTRUCTION | Hand blown frosted glass Powder coated aluminum body Polyester cord |
| SPECIFICATIONS | Source: LED lamp provided (G9 base) Power consumption: 4.5W Lumen output: 319lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 25 000h |
| CONTROL | Refer to our recommended list of dimmer models |
| CORD LENGTH | 108" / 274 cm |
| STAINLESS STEEL CABLE | 96" / 244 cm |
| WEIGHT | 3.5lb / 1.6kg |
| CERTIFICATIONS |     IP20 |
| WARRANTY | 2 years |



*dimensions are approximate and may vary slightly

FINISH



BK
Textured
black



WH
Textured
white



MB
Textured
midnight
blue



BE
Textured
blue



BG
Textured
beige



BU
Textured
burgundy



GN
Textured
green



TC
Textured
terracotta

CORD

(*CORDS ONLY AVAILABLE IN BLACK OR WHITE VINYL FOR AUSTRALIA)



BK
Black



WH
White



MB
Midnight
blue



BE
Blue



BG
Beige



BU
Burgundy




GN
Green

NOTES

- Must be installed by an electrician
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on our website for cleaning instructions
- Ceiling anchor not meant for slanted ceilings (available upon request)

LAMP ANATOMY

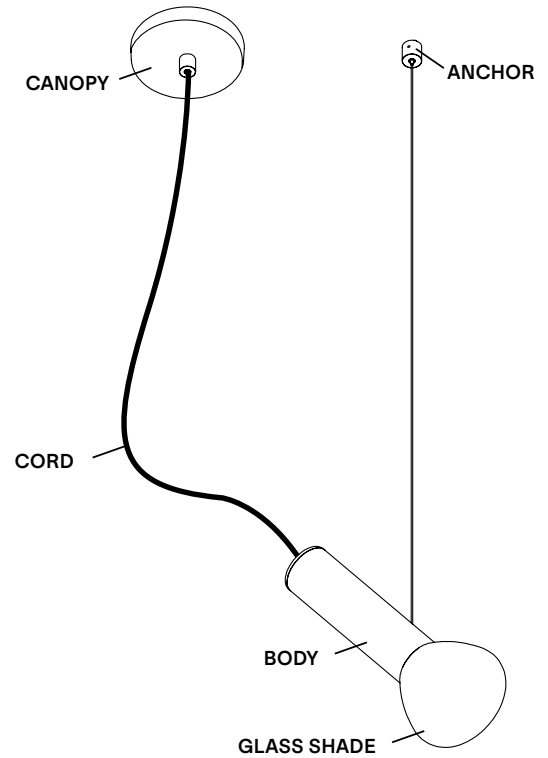

| | | Example | Fill with your selection |
|--------------------------|---|---------------------|--------------------------|
| COLLECTION | PARC Prc | PRC | PRC |
| MODEL | 02 | 02 | 02 |
| POSITION | A Anchor NA No anchor | A | |
| FINISH | BK Textured Black WH Textured White MB Textured Midnight Blue BE Textured Blue BG Textured Beige BU Textured Burgundy GN Textured Green TC Textured Terracotta CC Custom colour* | BK | |
| CORD | BK Black WH White MB Blue BE Blue BG Beige BU Burgundy GN Green CC Custom colour* | BK | |
| CANOPY AND ANCHOR | BK Textured Black WH Textured White MB Textured Midnight Blue BE Textured Blue BG Textured Beige BU Textured Burgundy GN Textured Green TC Textured Terracotta CC Custom colour* | BK | |
| FULL SKU | | PRC02ABKBKBK | |
| | | NOTES | |

*Custom colour available upon request. Material library on website.

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|------------------|----------------|-----------|-----------|------------------|
| LUTRON - MAESTRO | MAELV-600 | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | SELV-300P | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | SELV-300P | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | CTELV-303P | 100% | 0% | Phase Cut |
| LUTRON - DIVA | DVELV-300P | 100% | 0% | Phase Cut |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 100% | 30% | Phase Cut |

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|-----------------|-----------|-----------|-----------|------------------|
| VARILIGHT | V-PRO | 100% | 2% | Phase Cut |
| LEGRAND - NILOÉ | 3 996 35 | 87% | 15% | Phase Cut |
| NIKO | 310-0280X | 94% | 5% | Phase Cut |
| NIKO | 310-0190X | 100% | 1% | Phase Cut |

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.
