



Octave®
Top-mount/undermount double-equal kitchen sink
K-3842-1

Features

- 36" minimum base cabinet width.
- Double-equal bowls.
- 9" (229 mm) depth provides generous workspace.
- Single faucet hole.
- Includes bottom sink rack and sponge caddy.

Material

- Premium 18-gauge stainless steel.

Installation

- Dual-mount sink can be installed as top-mount or undermount.
- Includes top-mount installation hardware.
- Undermount installation kit not included.

Recommended Products/Accessories

K-8801 Sink drain and strainer with tailpiece
K-8799 Sink drain and strainer basket
K-23726 Drain treatment
K-23729 Stainless steel cleaner

Optional Products/Accessories

K-6453 Right-Bowl Sink Rack
K-11352 Disposal Flange with Stopper

Included Components

Product consists of:

K-6139 Sponge Caddy
K-6483 Sink Rack
1177160 Hardware Kit, Self-Rimming




Codes/Standards

ASME A112.19.3/CSA B45.4

**Lifetime Limited Warranty for
KOHLER® Stainless Steel Sinks**

See website for detailed warranty information.

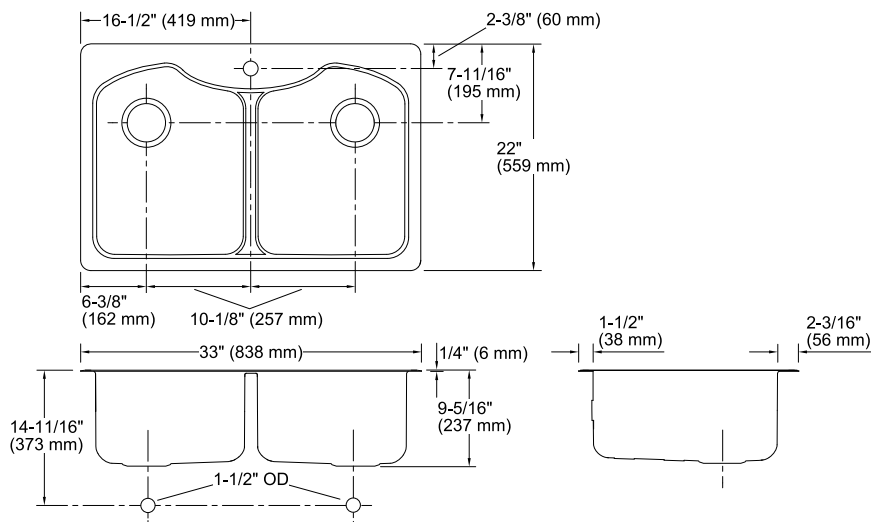

Technical Information

All product dimensions are nominal.

Bowl configuration:	Double equal
Installation:	Top-mount, Under-mount
Cutout:	Top-mount, 32-1/2" x 21-1/2" (826 mm x 546 mm) with 1/2" (13 mm) radius corners
Min. base cabinet width:	36" (914 mm)
Bowl area (Left):	Length: 14-3/8" (365 mm) Width: 18-5/16" (465 mm) Water depth: 9" (229 mm)
Bowl area (Right):	Length: 14-3/8" (365 mm) Width: 18-5/16" (465 mm) Water depth: 9" (229 mm)
Number of deck holes:	1
Faucet hole(s):	1-7/16" (37 mm)
Drain hole:	3-5/8" (92 mm)

Notes

Install this product according to the installation instructions.