


# 2" DURASAFE 2-SIDED CORNER PAD



## Custom Rigid Back Corner Pad

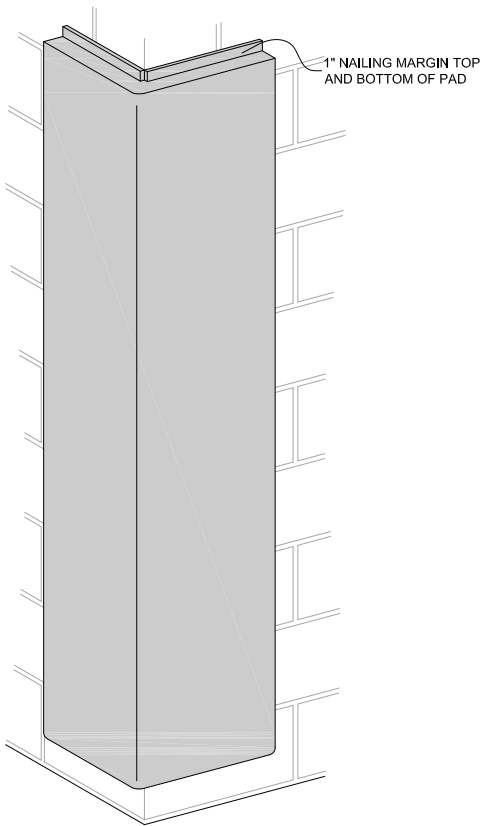

1" NAILING MARGIN TOP AND BOTTOM OF PAD


**WARNING**  
 This pad is provided to reduce the possibility of minor injuries. However, any activity involving motion and severe impacts may result in serious injuries, including but not limited to paralysis or death. No pad can guarantee the prevention of serious head or neck injuries that are due to a violent impact while participating in various sports activities.

### SAMPLE 6'-0" HEIGHT DIMENSIONS

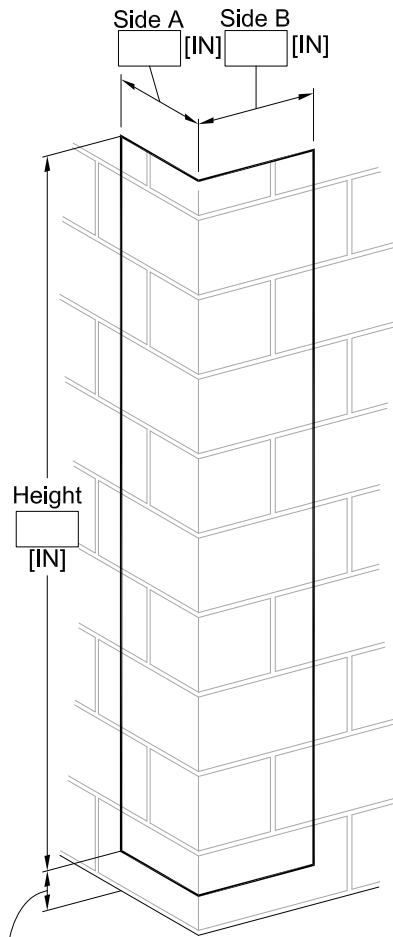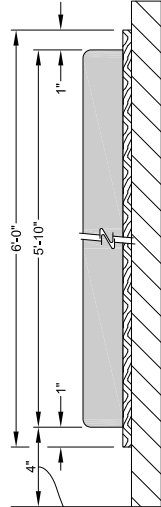

MAXIMUM ALLOWABLE DIMENSION TO MINIMIZE THE POSSIBILITY OF BODY CONTACT WITH THE WALL (Per ASTM Standard Specification F2440)

CORNER PAD - ADD 2 SIDES AND 5" CORNER

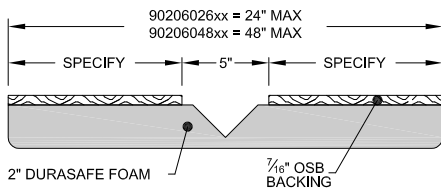

### COLOR SELECTION

<input type="checkbox"/>	01 - Light Blue	<input type="checkbox"/>	09 - Gray
<input type="checkbox"/>	02 - Royal Blue	<input type="checkbox"/>	10 - Maroon
<input type="checkbox"/>	03 - Red	<input type="checkbox"/>	11 - Purple
<input type="checkbox"/>	04 - White	<input type="checkbox"/>	12 - Black
<input type="checkbox"/>	05 - Orange	<input type="checkbox"/>	13 - Navy Blue
<input type="checkbox"/>	06 - Yellow Gold	<input type="checkbox"/>	14 - Kelly Green
<input type="checkbox"/>	08 - Tan	<input type="checkbox"/>	15 - Dark Green

### NAILING MARGINS?

- NONE  
 TOP & BOTTOM  
 TOP  
 BOTTOM

Pad numbers are calculated by adding the lengths of each side and the corner allowances. Maximum total width is 48". Pads requiring more than this dimension must be split into two or more pads.

### Optional Additional Items to Specify

See Page No. G-343 for specification on Porter No. 343 and 344 Molded Inserts.

See Page No. G-347-3 for specification on Porter No. 347100, 347300 and 347400 Wall Attachment Fittings.

SELECT PAD:

- 90206026xx - 24" x 72" OR LESS CORNER PAD - RIGID BACK  
 90206048xx - 48" x 96" OR LESS CORNER PAD - RIGID BACK

**PORTER**<sup>®</sup>

888-277-7778 PORTER@PORTERATHLETIC.COM  
 © COPYRIGHT 2017 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER \_\_\_\_\_

PROJECT NAME \_\_\_\_\_

**PORTER**  
 WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90206

8/11/2017

# 2" DURASAFE 2-SIDED CORNER PAD

Custom Rigid Back Corner Pad

## SPECIFICATIONS

### PORTER No. 90206026xx - 2" DURASAFE CORNER PAD 24"x72" (EACH)

Pads shall be fabricated to specified dimensions, with a "V" cut in filler and backing board as required, to facilitate installation and provide a neat, custom fit on exposed wall corners. Pads are two-sided (corner).

Pads will be constructed of 2" foam cemented to 7/16" backing board and covered with flame-retardant, vinyl-coated polyester folded and stapled securely to back of oriented strand board.

Panel shall meet the min. ASTM F2440 Standard Specification. Panels that have not been tested to this minimum standard shall not be considered as equal.

Entire face of panel, including the 1" nailing margins, shall be upholstered in a heavy (19-oz.) fire-retardant, high tensile, vinyl-coated polyester fabric material. Cover material shall be designated as flame resistant in accordance with NFPA 701, and State of California. The cover material shall have a tear strength of 100 P.S.I. and shall be mildew and rot resistant and fortified with an infection combating fungicide. Vinyl covering shall be folded and stapled securely to backside of oriented strand board. Vinyl covering is available in 14 colors - see color chart for options.

The installing contractor shall be responsible for proper inspection and installation of all pads. Attachment methods including but not limited to 1" nailing margins and/or "Z" clips supplied as specified. Installation shall be made in accordance with current factory suggested procedures.

Certifications:

- ASTM F2440 Standard Specification for Indoor Wall/Feature Padding

### PORTER No. 90206048xx - 2" DURASAFE CORNER PAD 48"x96" (EACH)

Same specifications as above except 48" x 96" or less in size.

PORTER  
WWW.PORTERATHLETIC.COM/FACILITY

WALL PAD SPECIFICATION SHEET

G-90206