

TOPCon

DHN-72X16

0~+5W

560~580W



Higher Power Generation Efficiency

N-type TOPCon module could increase power generation by 3%+ per watt compared with PERC module



Lower Degradation Rate, PID Resistance

First-year $\leq 1\%$, 2-30 year $\leq 0.4\%$; excellent Anti-PID performance



Lower Temp. Coefficient

More power generation under high-temperature



Better Dim Light Performance

Excellent performance under dim light

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO

ISO 45001: 2018/International standards for occupational health & safety

ISO 14001: 2015/Standards for environmental management system


ISO 9001: 2015/Quality management system



Quality Guarantee

15-Year Material & Technology Warranty


30-Year Linear Power Output Warranty

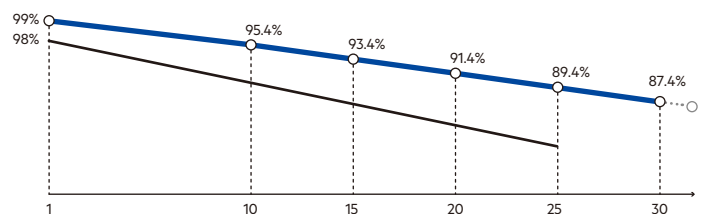

▲ DAH Solar Linear power output guarantee ▲ Standard Linear power output guarantee

Mechanical Specification

Cable	4.0mm ² , 350/250mm in length, (Including Connector) length can be customized
No.of Cells	144 (6×24)
Glass	3.2mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible
Weight	29kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	2279×1134×35mm
Packing	31pcs/Pallet, 620pcs/40HQ

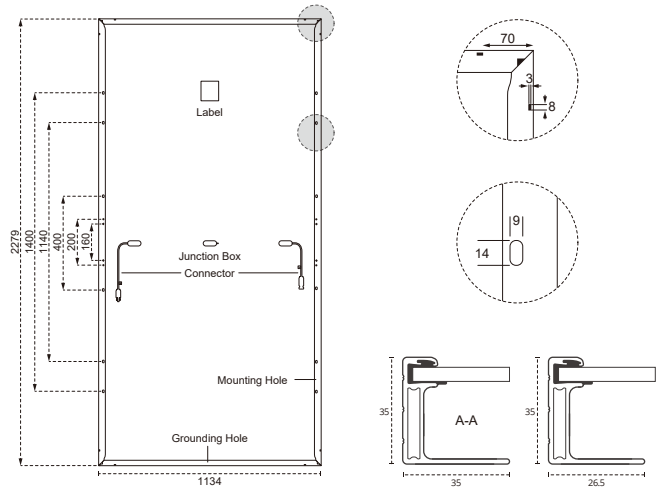

STC-Electrical Characteristics

Module Type	DHN-72X16				
Maximum Power (Pmax/W)	560	565	570	575	580
Open-circuit Voltage (Voc/V)	50.6	50.8	51.0	51.2	51.4
Maximum Power Voltage (Vmp/V)	42.8	43.0	43.2	43.4	43.6
Short-circuit Current (Isc/A)	13.90	13.96	14.02	14.08	14.14
Maximum Power Current (Imp/A)	13.08	13.14	13.19	13.25	13.30
Module Efficiency (%)	21.67	21.86	22.06	22.25	22.44

Standard Test Environment : Irradiance 1000W/m² , Cell temperature 25°C, Spectrum AM1.5

NOCT—Electrical Characteristics

Maximum Power (Pmax/W)	421	425	429	432	436
Open-circuit Voltage (Voc/V)	48.1	48.3	48.5	48.6	48.8
Maximum Power Voltage (Vmp/V)	40.7	40.9	41.0	41.2	41.4
Short-circuit Current (Isc/A)	11.22	11.27	11.32	11.37	11.42
Maximum Power Current (Imp/A)	10.36	10.40	10.44	10.49	10.53

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Operating Parameters

Maximum System Voltage	1500V DC
Power Tolerance	0~+5W
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of Isc (α Isc)	0.046%/°C
Temperature Coefficient of Voc (β Voc)	-0.25%/°C
Temperature Coefficient of Pmax (γ Pmp)	-0.30%/°C

Mechanical Loads

Snow load, frontside / Wind load, backside	5400Pa/2400Pa
--	---------------

I-V Curve

