


Hooks Self-Locking

Rigging

All three hooks are equipped with stainless steel triggers.

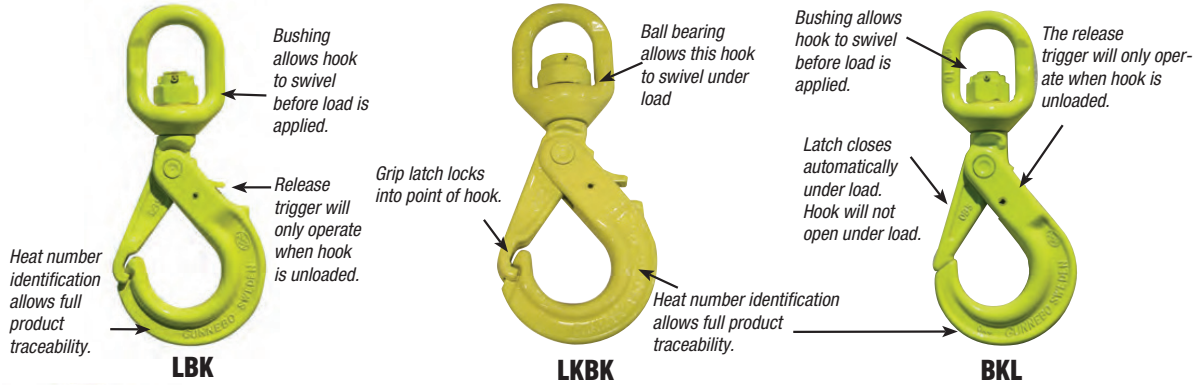

SELF-LOCKING HOOKS - LBK SWIVEL EYE GRIP LATCH (WITH BRONZE BUSHING)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)							Weight Each (Lbs.)
					L	B	C	E	F	G	H	
589751	LBK-7/8-10	9/32"	100	4,300	6.9	1.5	1.1	1.5	0.47	0.79	0.87	1.8
589751	LBK-7/8-10	5/16"	100	5,700	6.9	1.5	1.1	1.5	0.47	0.79	0.87	1.8
589753	LBK-10-10	3/8"	100	8,800	8.4	1.9	1.4	1.7	0.59	0.87	1.1	4.0
589754	LBK-13-10	1/2"	100	15,000	9.3	2.1	1.9	1.9	0.75	1.1	1.4	8.4
589755	LBK-16-10	5/8"	100	22,600	12.8	2.7	2.6	2.4	0.91	1.1	1.7	13.2

* Design Factor 4:1 Proof tested and certified.
Note: Hook may not be swiveled when under load.

SELF-LOCKING HOOKS - LKBK SWIVEL EYE GRIP LATCH (WITH BALL BEARINGS)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)							Weight Each (Lbs.)
					L	B	C	E	F	G	H	
589963	LKBK-7/8-10	9/32"	100	4,300	6.9	1.5	1.1	1.5	0.47	0.79	0.87	1.8
589963	LKBK-7/8-10	5/16"	100	5,700	6.9	1.5	1.1	1.5	0.47	0.79	0.87	1.8
589965	LKBK-10-10	3/8"	100	8,800	8.4	1.9	1.4	1.7	0.59	0.87	1.1	4.0
589966	LKBK-13-10	1/2"	100	15,000	9.3	2.1	1.9	1.9	0.75	1.1	1.4	8.4
589967	LKBK-16-10	5/8"	100	22,600	12.6	2.7	2.4	2.4	0.91	1.1	1.7	13.2

* Design Factor 4:1 Proof tested and certified.

SELF-LOCKING HOOKS - BKL WITH BRONZE BUSHING (SWIVEL EYE TYPE)

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	Dimensions (Inches)							Weight Each (Lbs.)
					L	B	C	E	F	G	H	
590102	BKL-6-10	7/32"	100	2,700	5.9	1.1	0.9	1.3	0.43	0.59	0.83	1.5
590104	BKL-7/8-10	9/32"	100	4,300	7.2	1.5	1.1	1.5	0.47	0.67	1.0	2.6
590104	BKL-7/8-10	5/16"	100	5,700	7.2	1.5	1.1	1.5	0.47	0.67	1.0	2.6
590106	BKL-10-10	3/8"	100	8,800	8.6	1.7	1.4	1.7	0.59	0.83	1.2	4.4
590107	BKL-13-10	1/2"	100	15,000	11.0	2.1	1.9	1.9	0.75	1.2	1.5	8.4
590108	BKL-16-10	5/8"	100	22,600	13.5	2.4	2.6	2.4	0.87	1.5	1.9	15.6
590109	BKL-18/20-10	3/4"	100	35,300	14.4	2.7	2.8	2.9	1.0	1.7	2.5	24.5

* Design Factor 4:1 Proof tested and certified.

Note: Hook may not be swiveled when under load.

