





MEDIUM TEMPERATURE
LOW OPEN FRONT-FRONT LOAD

<u>MODELS</u>

KGL - OF - (40, 50, 60) - S

KGL - OF - (40, 50, 60) - R





PULL DOWN NIGHT CURTAIN STANDARD





REMOTE AND SELF CONTAINED 404A REF - FORCED AIR REFRIGERATION

ALTERNATE REFRIGERANTS AVAILABLE BY SPECIAL REQUEST

IN COMPLIANCE
WITH
NATIONAL
ENERGY
STANDARDS





5659 Royalmount Ave.

Montreal, QC, Canada H4P 2P9

Telephone: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / Toll Free: 877.453.8832

12000 Biscayne Blvd.,Suite #108 Miami, FL, United States 33181

Telephone: 786.600.4687 / Toll Free 844.218.8477

Fax: 786.661.4100

Email: sales@mvpgroupcorp.com




员	MODEL	O.A LENGTH INCHES	VOLUME FT ³	CASE TEMP	ELECTRICAL - 115 VOLTS							WEIGHT LBS.		CRATE SIZE		
					COMPRESSOR		LIGHTS	EVAP	TOTAL	NEMA	NO	WITH	W		Н	
					H.P.	F.L.A.	L.R.A.	FANS HTRS	PAN	AMPS	115V PLUG	CRATE	CRATE	"L"	"W"	"H"
	KGL-OF-40-S	41	12.98	36/41 F	5/8	8.9	47	.85	6.7	16.42	5-20P	357	507	43-3/4	34-1/2	67-3/4
	KGL-OF-50-S	50-1/8	16.21	36/41 F	3/4	16	64	1.33	6.7	24.00	5-30P	394	569	53	34-1/2	67-3/4
	KGL-OF-60-S	60-5/8	19.85	36/41 F	3/4	16	64	1.39	6.7	24.06	5-30P	45 <mark>4</mark>	653	63-1/2	34-1/2	67-3/4

REMOTE		O.A.	CASE	115 VOLTS		WEIGHT LBS.		
	MODEL	LENGTH INCHES	TEMP	TOTAL AMPS	B.T.U.	NO CRATE	WITH CRATE	
	KGL-OF-40-R	41	36/41 F	.40	4125	291	441	
	KGL-OF-50-R	50-1/8	36/41 F	.43	4897	317	491	
	KGL-OF-60-R	60-5/8	36-41 F	.49	5141	376	575	

NOTE

- THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT
- LENGTH INCLUDES (2) ENDS AT 1-1/2" EACH
- B.T.U.'S CALCULATED AT +14°F AND 90°F AMBIENT CASES ENGINEERED TO OPERATE AT 75°F AND 55% RH
- ON REMOTE CASES IF NO FLOOR DRAIN IS PROVIDED-AN EVAPORATIVE PAN MUST BE ORDERED AND 6.7 AMPS ADDED TO THE AMP LOAD
- REMOTE CASES PROVIDED WITH EXPANSION VALVE AND LIQUID SOLENOID FOR PUMPDOWN CYCLE
- REMOTE CASES ARE HARD WIRED NO PLUGS

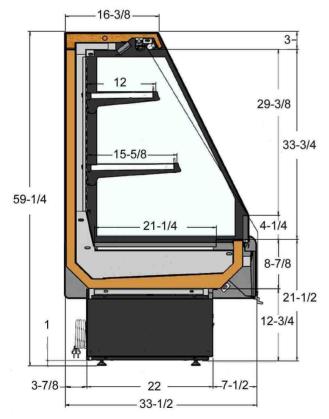

ADJUSTABLE FEET ADJUSTABLE LEGS CASTERS

STANDARD FEATURES

- INSULATION INJECTED FOAM
- INTERIOR PVC COATED STEEL-GRAY
- EXTERIOR PVC COATED STEEL-SILVER
- ENDS-FOAMED -BLACK POLYSTYRENE
- PULL DOWN NIGHT CURTAIN
- CORD AND PLUG ON 16 AMP OR LESS
- CASES ARE MULTIPLEXIBLE
- LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
- PRODUCT STOP ON ALL SHELVES
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- ADJUSTABLE SHELVES
- ADJUSTABLE FEET
- EVAPORATIVE DRAIN PAN ON S/C
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7
- THESE CASES COMPLY WITH THE NATIONAL ENERGY STANDARS

OPTIONAL FEATURES

- CASTERS ADD 4-3/8" TO HEIGHT
- ADJUSTABLE STAINLESS STEEL LEGS-FROM 5-1/8" TO 7-5/8"
- IF THERE IS NO FLOOR DRAIN AN EVAP PAN MUST BE ORDERED ADD 6.7 AMPS TO 115V. - ON REMOTE
- OTHER COLORS AVAILABLE
- STAINLESS STEEL EXTERIOR
- STAINLESS STEEL INTERIOR
- ADDITIONAL SHELVES
- PRICE TAG MOULDING

WARRANTY

ONE YEAR PARTS AND LABOR WITH FOUR ADDITIONAL YEARS COMPRESSOR (PARTS ONLY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE