



TSUN GEN3 Microinverter

TSOL-MS600-D/TSOL-MS800-D



Maximized Efficiency

Individual optimization, se-parate dedicated MPPT for each panel.

New topology design, max. efficiency up to 96.7%.

Flexibility

Suitable for TSOL-ESK series AC module solution.

Plug & play installation, Easy to install.

Safety

Max. DC voltage 60V. No threat for high DC voltage.

Integrated LoM protection function. Ensure the safety of power grid.

Reliability

Die casting design and glue filling technology. Better thermal dissipation.

Standard 12 years warranty, Quality guaranteed.

CE VDE 0126 VDE 4105 EN 50549 INMETRO RD 1699 G 98



TSUNESS Co., Ltd

sales@tsun-ess.com www.tsun-ess.com +86-512-66186028

Technical Data

Model	TSOL-MS600-D	TSOL-MS800-D
Input(DC)		
Recommended Module Power [W]	300-550	300-550
Start up Voltage [V]	22	22
MPPT Voltage Range [V]	16-60	16-60
Max. Input Voltage [V]	60	60
Max. Input Current [A]	14	14
Max. Input Short-circuit Current[A]	20	20
Quantity of MPPT	2	2
Output [AC]		
Max. Continuous Output Power [VA]	600	800
Nominal Continuous Output Power [W]	600	800
Nominal Output Current [A]	2.61	3.48
Max. Output Current [A]	3	4
Nominal Output Voltage [V]	220/230/240(175~270), L/N/PE	
Nominal Frequency [Hz]	50/60	
Power Factor	>0.99 default, 0.8 leading ... 0.8 lagging	
Output Current Harmonic Distortion	<3%	
Max. Units Per Branch	7	5
Efficiency		
Peak Inverter Efficiency	96.7%	
CEC Weighted Efficiency	96.5%	
Nominal MPPT Efficiency	99.9%	
EU Efficiency	96.3%	
Night Time Power Consumption [mW]	< 50	
Mechanical Data		
Dimensions [WxHxD mm]	250 * 180 * 30	
Weight [kg]	3	
Type of Enclosure	IP67	
Cooling	Natural Convection	
Environmental Data		
Operating Ambient Temperature Range [°C]	-40 °C to 65°C	
Operating Internal Temperature Range [°C]	-40 °C to 85°C	
Relative Humidity	0-100% condensing	
Max. Operating Altitude Without Derating [M]	2000	
Monitor	Integrated WiFi (Optional)	

Diagram

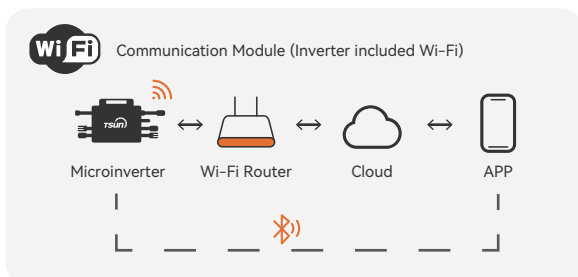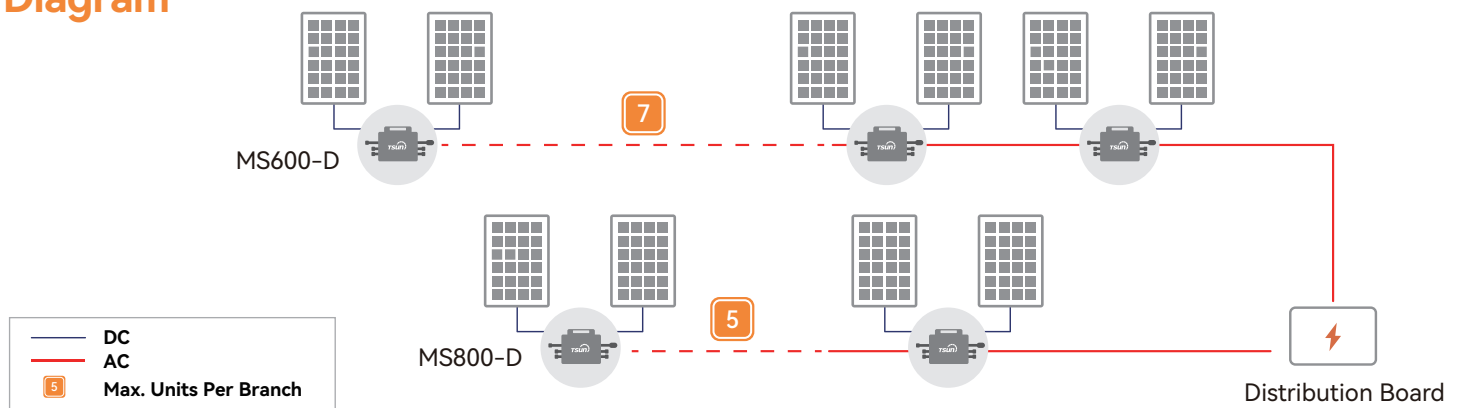

For more information , visit / contact us at www.tsun-ess.com

© 2022 TSUNESS . All rights reserved.All specifications are subject to change without prior notice