

# 💈 PV-ezRACK®

## Beaver Tile Interface H119, Width 150mm

#### Assembly

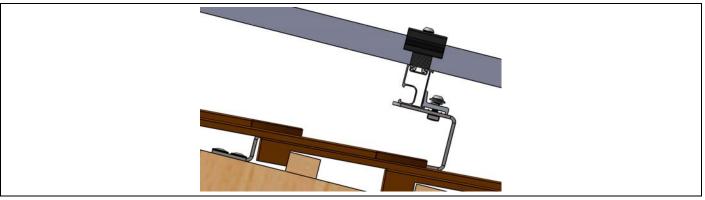

#### Component

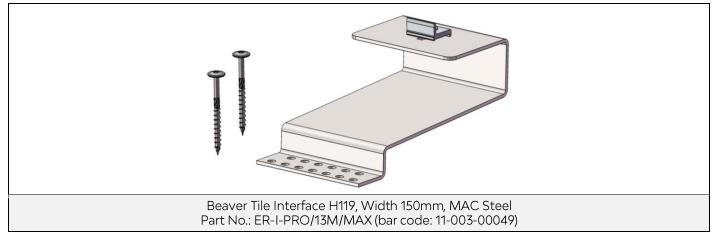

#### **Technical Specification**

Application	Beaver Tile Roof with Timber Purlin		
Screw Specification	2 x Wood screws M8*100, T40, Electro Galvanised ETA Certification		
Dimensions	L290mm*W150mm*H119mm		
Packaging	10 units per carton		
Weight	2.359 Кд		
Material	Main parts: MAC Steel (Zn-Mg-Al Coating Steel) Rail clamp: AL6005-T5 Fasteners: SUS 304	238 290	
Color	Silver		
Standard	BS EN 1990:2002   EN 1995-1-1   DIN EN 1991-1- 4   DIN EN 1991-1-3   VDI 6012 Blatt 1.4		

f @ClenergyGlobal @ClenergyClub @ClenergyAUS ท 🖸 @Clenergy 🞯 @ClenergyClub y @Clenergy\_global



### **Related Components**

Rail	Inter Clamp	End Clamp	Grounding Lug
Main Material and Finish:	Main Material and Finish:	Main Material and Finish:	Main Material and Finish:
AL6005-T5, Anodised (no	AL6005-T5, Anodised (no	AL6005-T5, Anodised (no	AL6005-T5, Anodised (no
less than 10 μm, excluding	less than 10 μm, excluding	less than 10 μm, excluding	less than 10 μm, excluding
machined surfaces)	machined surfaces)	machined surfaces)	machined surfaces)
0 0			
Grounding Clip	Cable Clip	Сар	Wood Screw
Main Material and Finish: Stainless steel SUS304	Main Material and Finish: PA6	Main Material and Finish: Silica gel	Main Material and Finish: Carbon Steel, Electro Galvanised

👔 @ClenergyGlobal @ClenergyClub @ClenergyAUS 👔 🖸 @Clenergy 🞯 @ClenergyClub 🕥 @Clenergy\_global