

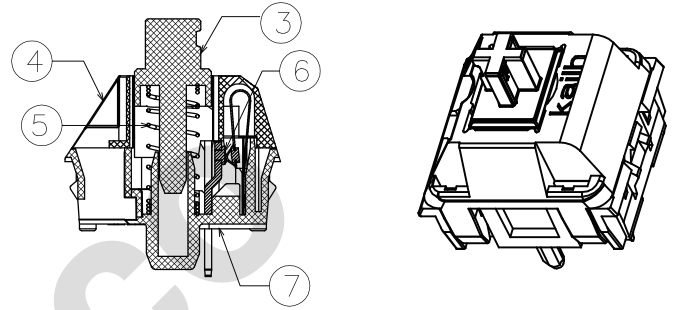
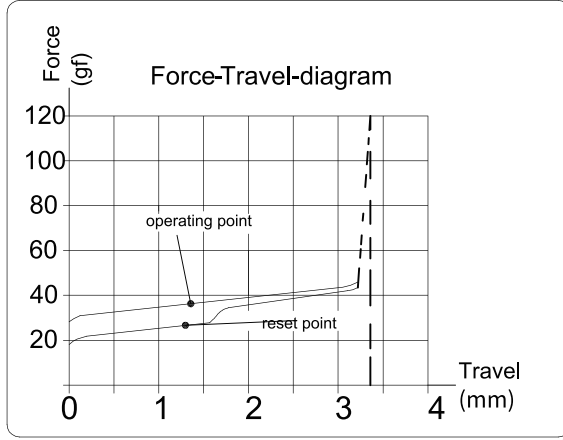
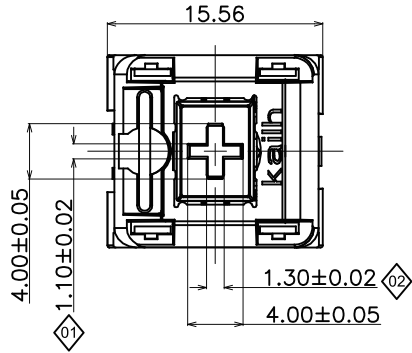

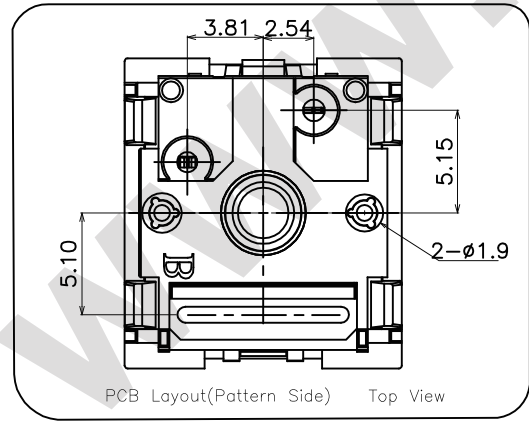
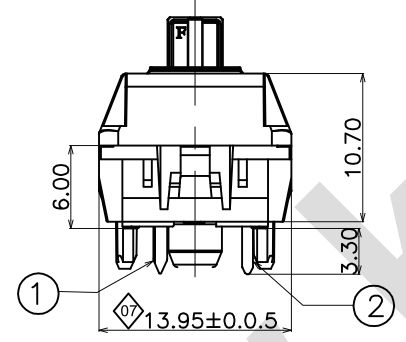


ABIDE BY WEEE & ROHS

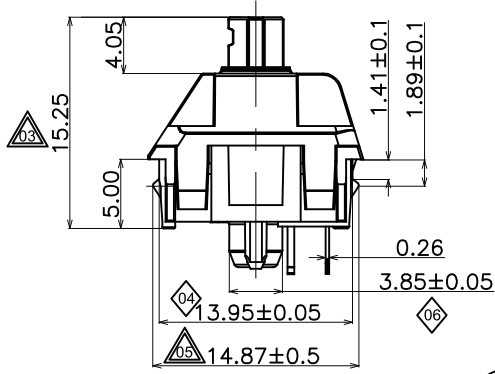

- Specification :
- 1.Rating :12V AC/DC max. 2V DC min. 10mA AC/DC max. 10μA DC min.
 - 2.Contact Resistance : 200mΩ Max
 - 3.Insulation Resistance :100MΩ Min (DC500V)
 - 4.Withstand Voltage :AC100V(50-60Hz) for 1 minute
 - 5.Bounce Time:≤5msec (at 16 in/sec. actuation speed)
 - 6.Operation Force :37±10gf
 - 7.Pre travel:1.3^{0.4}_{-0.3} mm
 - 8.Total travel:3.4±0.4 mm
 - 9.Operating Life :50,000,000 Cycles.



⑦	Base	1	PC			
⑥	contact	2	Composite gold			
⑤	Spring	1	Stainless Steel			
④	Cover	1	PC			
③	Keystroke	1	POM	Burgundy		
②	static plate	1	Brass	Plating Sn		
①	movable plate	1	Copper Alloy			
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	Kailh KAIHUA ELECTRONICS CO.,LTD			
DRAWN	Guyuxin	2022.4.16				
CHECKED			TITLE:	PGI511 Keystroke Switch		
APPROVALS			PART NO:	CPGI51101S128		
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10<L	±0.20				
	5<L	±0.15				
	L≤5	±0.10	±2°	DRAWING NO.	KHA-PGI511-365EN	SHEET: 10F1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
---------	------	-------	--------------	---------	--------	--------


Kailh

KAIHUA ELECTRONICS

Document Number:

KH-PS2204-31

Product Specification

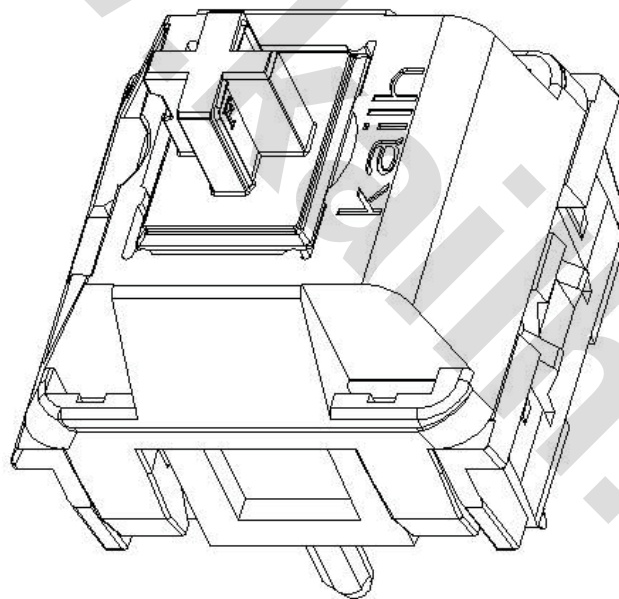

P/N:

CPG151101S128

Title :

PG1511Keyboard Switch

P/N: CPG151101S128	DOC. No.: KH-PS2204-31	Rev.: A	Page: 2/10
------------------------------	----------------------------------	-------------------	----------------------

Content

1. Scope	3
2. Product Application	3
3. Technology Parameters	3
4. Ratings	3
5. Profile Dimensions	3
6. Electrical Performance	4
7. Mechanical Performance	5~6
8. Environmental Performance	7~8
9. Recommended PCB Layout	9
10. Loading Parameter Specification	10
11. Precaution	10

P/N: CPG151101S128	DOC. No.: KH-PS2204-31	Rev.: A	Page: 3/10
------------------------------	----------------------------------	-------------------	----------------------

1. Scope:

This Product Specification covers the requirement of Mechanical Keyboard switch on product performance, test methods and quality assurance provisions.

2. Product Application:

Mainly applied on computer keyboards, cash registers, industrial equipment and Man-Machine interface.

3. Technology Parameters:

Ambient Humidity: 45 ~ 85% RH

Operating Temperature Range: $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Storage Temperature Range: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Suggested storage period: about 6 months

Require the tin part on the switch terminals should keep good after storage guarantee date

Normal Condition:

Ambient temperature: $20 \pm 2^{\circ}\text{C}$

Relative humidity: $65\% \pm 5\% \text{RH}$

Air pressure: 86~101KPa

Solder Ability: Lead-tin soldering: $245^{\circ}\text{C} \pm 5\text{s}$

Lead free soldering: $255^{\circ}\text{C} \pm 5\text{s}$

Withstand Soldering Temperature: Wave soldering: $260 \pm 5^{\circ}\text{C} \quad 5 \pm 0.5\text{s}$

4. Ratings

Rating: 12V AC/DC max. 2V DC min


10mA AC/DC max. $10\mu\text{A}$ DC min

Insulation Resistance: $\geq 100\text{M}\Omega/\text{DC } 500\text{V}$


Withstand Voltage: 100 AC 1 Minute

Mechanical Life: 50,000,000 Cycles



5. Profile Dimensions


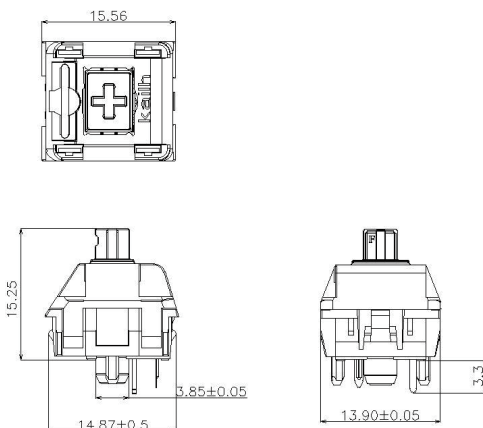


6. Electrical Performance

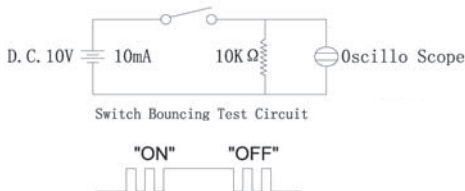
Item	Description	Test Condition	Requirement
6.1	Contact Resistance	<p>Static load: (Operation force)x2, which is applied on the center of Switch stem.</p> <p>Measurement tool: Contact resistance Meter. (1KHz,20mV,5~50mA)</p> <p>Measured at low current (100mA or less).</p>	200mΩ Max
6.2	Insulation Resistance	<p>Apply a Voltage of DC 500 V for 1 minute, according to the below method.</p> <p>(1) Between terminals. (2) Between terminal and Body.</p>	100mΩ Min
6.3	Dielectric withstanding voltage	<p>Apply a Voltage of AC100 V (50~60Hz) for 1 minute, according to the below method.</p> <p>(1) Between terminals. (2) Between terminal and Body.</p>	No evidence of breakdown
6.4	Bouncing	<p>Operation speed: 3~4 times/s</p> <p>Oscillo scope</p> <p>Switch Bouncing Test Circuit</p>  <p style="text-align: center;">Switch Bouncing Test Circuit</p> <p style="text-align: center;">"ON" "OFF"</p>	<p>Before Life cycle: On: 5ms MAX Off: 5ms MAX</p> <p>After Life cycle: On: 10ms MAX Off: 10ms MAX</p>

7. Mechanical Performance

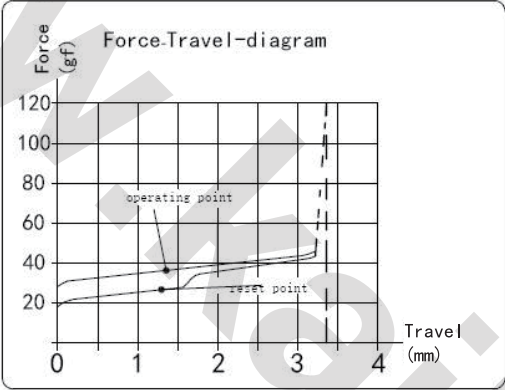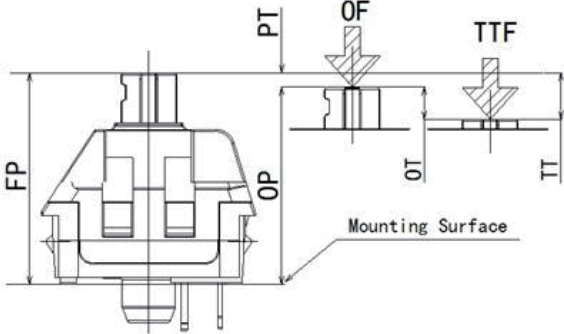Item	Description	Test Condition	Requirement
7.1	Load Curve	<p>Place the vertical direction of switch operation and gradually increase the load applied to the center of the stem until it stop.</p>  <p>The graph shows Force (gf) on the y-axis (0 to 120) and Travel (mm) on the x-axis (0 to 4). It features two curves: an upper curve for the operating point and a lower curve for the reset point. The operating point is marked at approximately 35 gf and 1.5 mm, while the reset point is at approximately 25 gf and 1.5 mm. A vertical dashed line is drawn at approximately 3.5 mm travel.</p>	See page 9
7.2	Loading parameter	<p>Place the vertical direction of switch operation and gradually increase the load applied to the center of the stem until it stop.</p>  <p>The diagram shows a cross-section of the switch. Labels include: FP (Frame Height), OP (Operating Point), pT (Plunger Travel), OF (Operating Force), TTF (Total Travel Force), OT (Operating Travel), TT (Total Travel), and Mounting Surface.</p>	See page 9

7.3	Static Strength	<p>A static load of 3kgf shall be applied in the direction of button operation for a period of 60 seconds.</p> 	<p>No damage (Electrical) And mechanical</p>
7.4	Stem Pull Strength	<p>Break by a pull force applied opposite to the direction of stem operation.</p>	<p>5kgf Min</p>
7.5	Shock	<p>Measured by according to the below condition: (1) Acceleration: 80g (2) Cycles of test: 3 cycles each in 6 directions, for a total of 18 cycles.</p> 	<p>Shall meet No.6, 7.1, 7.2.</p>
7.6	Life Test	<ol style="list-style-type: none"> 1) D.C.12V 10mA resistance load 2) Operation speed: 5-6 times / s 3) Push force: 150gf 4) Operation number: 50,000,000cycles 	<p>Contact resistance: 1000mΩ Max Bouncing: 10ms Max Operation force: Variation rate within ±30%</p>


8. Environmental Performance

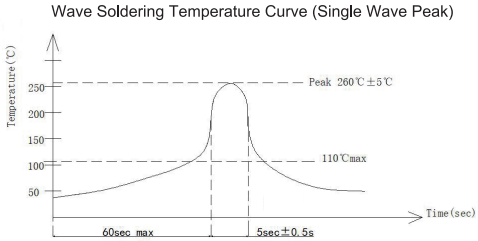Item	Description	Test Condition	Requirement												
8.1	Cold test	(1) Temperature: $-20\pm 2^{\circ}\text{C}$ (2) Duration of test: 48h (3) Take off a drop water (4) Standard conditions after test: 1h	Contact resistance: 200mΩ Max Shall meet: No. 6.2 to 6.4 No. 7.1 to 7.2												
8.2	Heat test	(1) Temperature: $70\pm 2^{\circ}\text{C}$ (2) Duration of test: 48h (3) Take off a drop water (4) Standard conditions after test: 1h	Contact resistance: 200mΩ Max Shall meet: No. 6.2 to 6.4 No. 7.1 to 7.2												
8.3	Temperature cycle	(1) Test cycles: 5 cycles (2) Standard condition after test: 1h <table border="1" data-bbox="411 1317 1015 1507"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration of test</th> </tr> </thead> <tbody> <tr> <td rowspan="4">1 cycle</td> <td>$20\pm 5^{\circ}\text{C}$</td> <td>1h</td> </tr> <tr> <td>$-20\pm 2^{\circ}\text{C}$</td> <td>1h</td> </tr> <tr> <td>$20\pm 5^{\circ}\text{C}$</td> <td>1h</td> </tr> <tr> <td>$70\pm 5^{\circ}\text{C}$</td> <td>1h</td> </tr> </tbody> </table>		Temperature	Duration of test	1 cycle	$20\pm 5^{\circ}\text{C}$	1h	$-20\pm 2^{\circ}\text{C}$	1h	$20\pm 5^{\circ}\text{C}$	1h	$70\pm 5^{\circ}\text{C}$	1h	Contact resistance: 200mΩ Max Shall meet: No. 6.2 to 6.4 No. 7.1 to 7.2
	Temperature	Duration of test													
1 cycle	$20\pm 5^{\circ}\text{C}$	1h													
	$-20\pm 2^{\circ}\text{C}$	1h													
	$20\pm 5^{\circ}\text{C}$	1h													
	$70\pm 5^{\circ}\text{C}$	1h													
8.4	Soldering heat test	Soldering area: T/2 of PWB thickness. (PWB: T=1.6mm) Soldering temperature: $260\pm 5^{\circ}\text{C}$ Soldering time: $5\pm 0.5\text{s}$ 	Appearance: No abnormality.												

8.5	Solder ability	<p>1. Hand soldering: Please practice according to below condition: (1) Soldering Temperature: $350\pm 5^{\circ}\text{C}$ (2) Continual soldering time: $3\pm 0.5\text{s}$ (3) Capacity of soldering iron: $\leq 20\text{w}$</p> <p>2. Automatic PIP soldering: For the product of T/H according to below condition:</p>	At least 90% of surface area of immersed portion shall be covered by solder.
8.6	Humidity test	<p>(1) Temperature: $60\pm 2^{\circ}\text{C}$ (2) relative humidity: 90~95% R.H. (3) Duration of test: 48h (4) Take off a drop water (5) Standard conditions after test: 1h</p>	Contact resistance: 200m Ω Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2
8.7	Salt Spray	<p>Apply the following environment to test(Only for contact test) :</p> <p>(1) Temperature: $35\pm 5^{\circ}\text{C}$ (2) Salt water density: $5\pm 1\%$ (3) Duration: 12hours (4) After test, the salt deposit shall be removed by running water.</p>	Appearance: No corrosion spot, no crack, no base plate naked. Contact Resistance: 200 m Ω Max

9. Recommended PCB Layout


Mounting Options

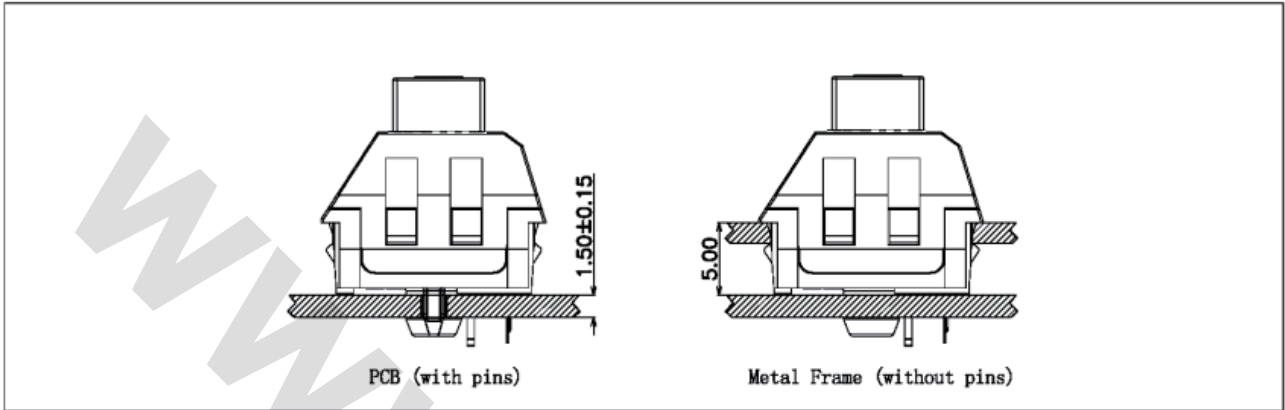


Circuit Board Layouts

Grid line spacing = 1.27mm


Keyswitch without fixation pins

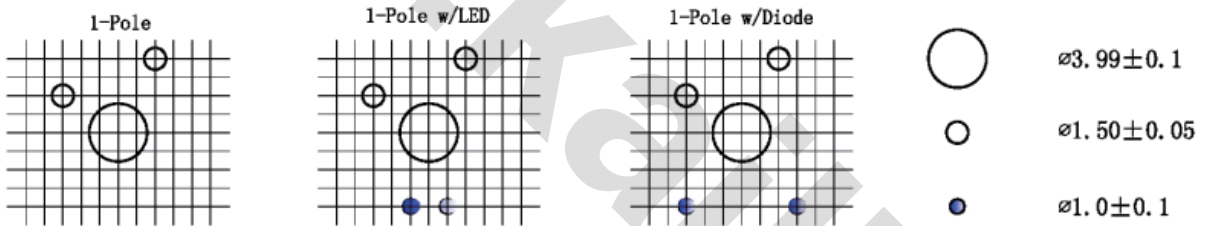

Keyswitch with fixation pins

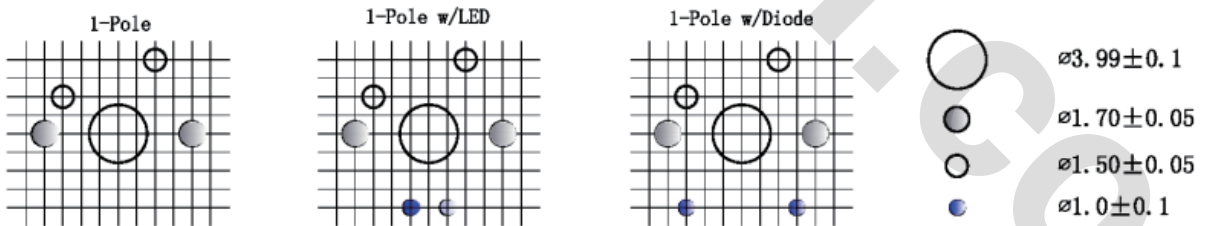

Metal Frame Cutout Dimensions

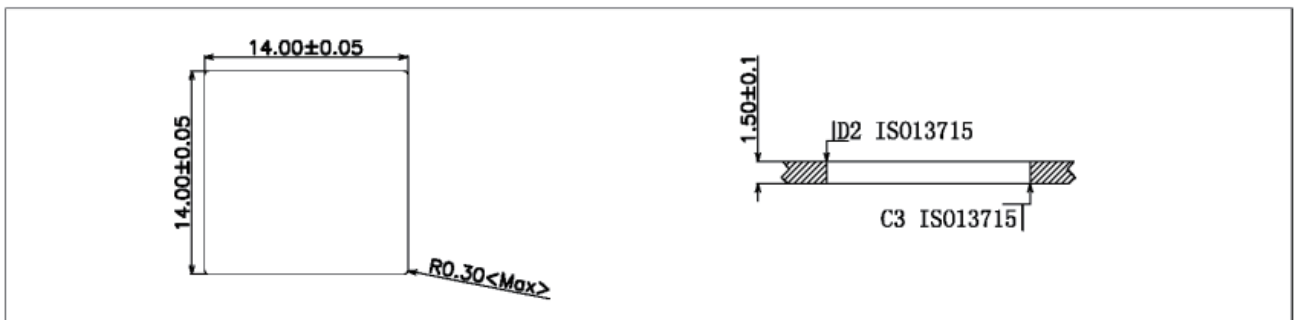

10. Loading Parameter (FP/OP/PT/OF / OT/TT) Specification

Parameter	Unit	Specification	Remark
FP	mm	15.25 ± 0.2	
OP	mm	13.95 ± 0.7	
PT	mm	1.3+0.4/-0.3	
OF	gf	37 ± 10	
OT	mm	1.2	Min.
TT	mm	3.4 ± 0.4	

11. Precaution

11.1 Immersion Soldering condition

ITEM	CONDITION
Preheat temperature	110°C Max (Ambient temperature of soldering surface of P.W.B)
Preheat time	60s, Max
Area of flux	1/2 Max of PWB Thickness
Temperature of solder	260±5°C
Time of immersion	5±0.5s
Number of soldering	2time Max (But should down heat of the first soldering)
Printed wiring board	Single side copper-clad laminates

- (1) After switches were soldered, please be careful not to clean switches with solvent
- (2) Under the condition of using soldering iron, soldering temperature shall be 350°C max within 3 sec.

11.2 Notes

- (1) Please be cautious not to give excessive static load or shock to switches.
- (2) Please be careful not to stack up P. W. B. after switches were soldered.
- (3) Preservation under high temperature and high humidity or corrosive gas should be avoided Especially.
When you need to preserve for a long period, do not open the carton.
- (4) The standard storage period is 3 months, with maximum up to 6months, preferably to be used as soon as possible.
After opening the package, you should put the remaining switches in a plastic bag to prevent from damp and corrosive gas.
- (5) This Product Specification is considered as the technical agreement on product between the receiving customer and Kailh. Any information on Product Catalogue which is in conflict with or different from the corresponding information of this document is considered as invalid.
- (6) It will be considered that customer already confirmed and accepted this specification if customer issue purchase order to us directly.
- (7) If there is no order or no request for new specification after 1 year upon this specification is issued, the specification will be regarded as invalid.
- (8) Products meet the ROHS & REACH environmental management substances control standards.