

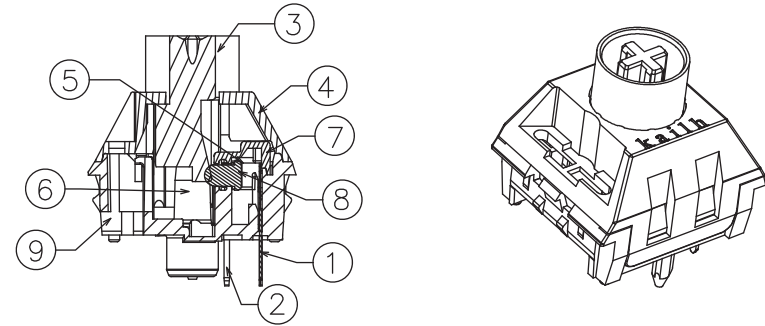
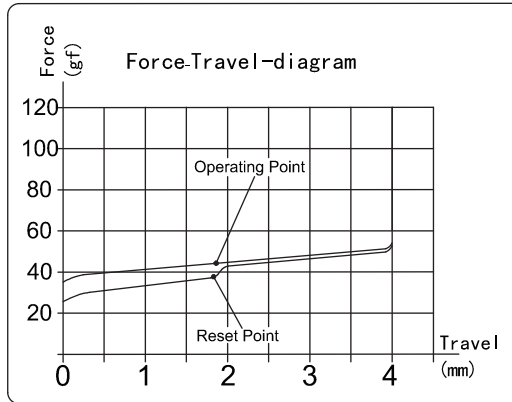




ABIDE BY WEEE & ROHS



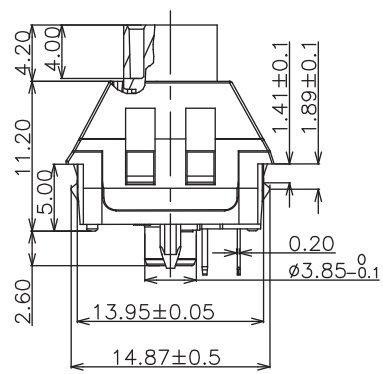


- Specification :
- 1. Rating: 12 VAC/DC max. 2 VDC min. 10mA AC/DC max. 10 μA DC min.
 - 2. Contact Resistance: 200mΩ Max
 - 3. Insulation Resistance: 100MΩ Min. (DC100V)
 - 4. Withstand Voltage: AC100V (50-60Hz) for 1 minute
 - 5. Operation Force: 45±10gf
 - 6. Conduction travel: 1.7±0.4mm
 - 7. Total travel: 4.0±0.3mm
 - 8. Electrical Life: 50,000,000 Cycles (min).
 - 9. Degree of protection: IP54(excluding the terminals)
- <Feel is allowed to have difference before and after life test>

■ Circuit Diagram



■ Circuit Diagram

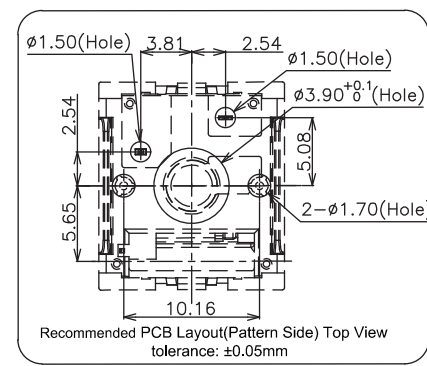

⑨	Base	1	POM	Yellow	
⑧	Slider	1	POM	Green	
⑦	Protecting Cover	1	Nylon	Nature	
⑥	Spring	1	Stainless Steel	Nature	
⑤	Contact	2	Composite gold		
④	Cover	1	POM	Yellow	
③	Keystroke	1	POM	Yellow	
②	Static Plate	1	Copper Alloy	Nature	
①	Movable Plate	1	Copper Alloy	Nature	
ITEM	PART NAME	TER'NO, QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	Kailh KAIHUA ELECTRONICS CO., LTD TITLE: PG1511F Keystroke Switch										
DRAWN	HuHaixin	2022.06.25											
CHECKED			PART NO:	CPG1511F01S138									
APPROVALS			TOLERANCES ARE: <table border="1" style="display: inline-table; vertical-align: middle;"> <tr><td>30<L</td><td>±0.30</td></tr> <tr><td>10<L30</td><td>±0.20</td></tr> <tr><td>5<L10</td><td>±0.15</td></tr> <tr><td>L≤5</td><td>±0.10</td></tr> </table> ANGLE UNIT: mm SCALE: 1:1 PROJ:			30<L	±0.30	10<L30	±0.20	5<L10	±0.15	L≤5	±0.10
30<L	±0.30												
10<L30	±0.20												
5<L10	±0.15												
L≤5	±0.10												
ECN NO.	REV.	DATE.	DRAWING NO.	KHA-PG1511F-167EN	SHEET: 1 OF 1								

NEW						
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.


Kailh

KAIHUA ELECTRONICS

Document Number:

KH-PS2206-11

Product Specification

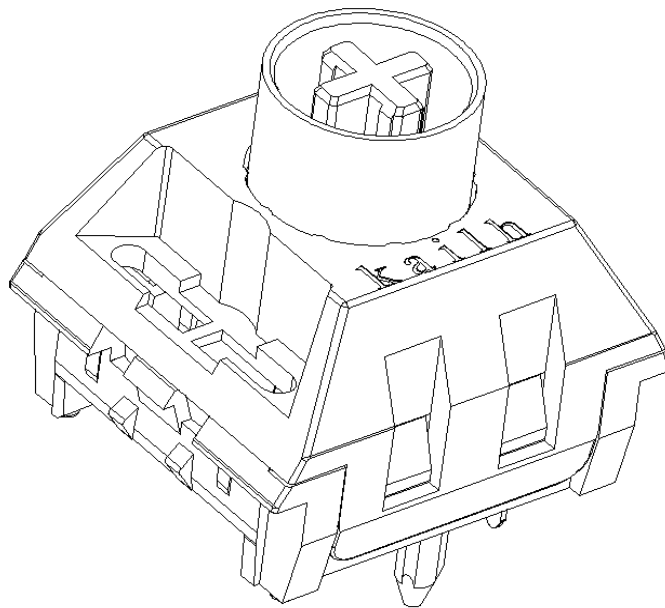

P/N:

CPG1511F01S138

Title :

PG1511F Keyboard Switch

P/N: CPG1511F01S138	DOC. No.: KH-PS2206-11	Rev.: A	Page: 2/11
-------------------------------	----------------------------------	-------------------	----------------------

Content

1. Scope	3
2. Product Application	3
3. Technology Parameters	3
4. Ratings	3
5. Profile Dimensions	3
6. Electrical Performance	4
7. Mechanical Performance	5~6
8. Environmental Performance	7~9
9. Recommended PCB Layout	10
10. Loading Parameter Specification	11
11. Precaution	11

P/N: CPG1511F01S138	DOC. No.: KH-PS2206-11	Rev.: A	Page: 3/11
-------------------------------	----------------------------------	-------------------	----------------------

1. Scope:

This Product Specification covers the requirement of Mechanical Keyboard switch on product performance, test methods and quality assurance provisions.

2. Product Application:

Mainly applied on computer keyboards, cash registers, industrial equipment and Man-Machine interface.

3. Technology Parameters:

Ambient Humidity: 45 ~ 85% RH

Operating Temperature Range: $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Storage Temperature Range: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Suggested storage period: about 6 months

Require the tin part on the switch terminals should keep good after storage guarantee date

Normal Condition:

Ambient temperature: $20 \pm 2^{\circ}\text{C}$

Relative humidity: $65\% \pm 5\% \text{RH}$

Air pressure: 86~101KPa

KH-PS2206-11: Lead-tin soldering: $245^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 5s \pm 0.5s

Lead free soldering: $255^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 5s \pm 0.5s

Withstand Soldering Temperature: $260^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 5s \pm 0.5s

4. Ratings

Rating: 12V AC/DC max. 2V DC min




10mA AC/DC max. 10 μ A DC min

Insulation Resistance: $\geq 100\text{M}\Omega/\text{DC}$ 100V


Withstand Voltage: 100 AC 1 Minute

Mechanical Life: 50,000,000 Cycles



5. Profile Dimensions





6. Electrical Performance

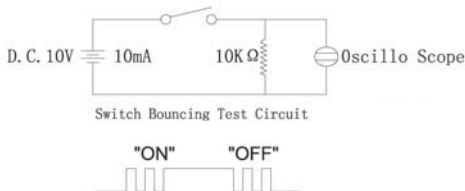Item	Description	Test Condition	Requirement
6.1	Contact Resistance	<p>Static load: (Operation force)x2, which is applied on the center of Switch stem. Be measured when the switch contact stabilization.</p> <p>Measurement tool: Contact resistance Meter. (1KHz,20mV,5~50mA)</p> <p>Measured at low current (100mA or less).</p>	200mΩ Max
6.2	Insulation Resistance	<p>Apply a Voltage of DC 100 V for 1 minute, according to the below method.</p> <p>(1) Between terminals. (2) Between terminal and Body.</p>	100mΩ Min
6.3	Dielectric withstanding voltage	<p>Apply a Voltage of AC100 V (50~60Hz) for 1 minute, according to the below method.</p> <p>(1) Between terminals. (2) Between terminal and Body.</p>	No evidence of breakdown
6.4	Bouncing	<p>Operation speed: 3~4 times/s Oscillo scope Switch Bouncing Test Circuit</p>  <p style="text-align: center;">Switch Bouncing Test Circuit</p>	<p>Before Life cycle: On: 5ms MAX Off: 5ms MAX</p> <p>After Life cycle: On: 10ms MAX Off: 10ms MAX</p>

7. Mechanical Performance

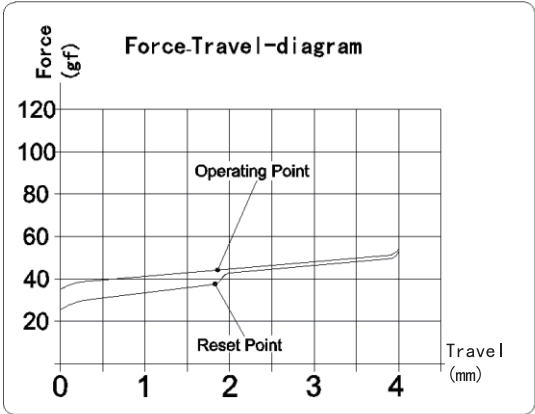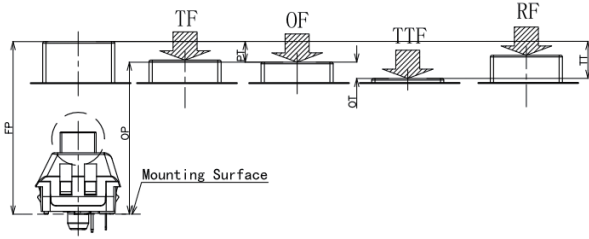Item	Description	Test Condition	Requirement
7.1	Load Curve	<p>Place the vertical direction of switch operation and gradually increase the load applied to the center of the stem until it stop.</p>  <p>The diagram is a line graph titled 'Force-Travel-diagram'. The vertical axis is labeled 'Force (gf)' and ranges from 0 to 120 in increments of 20. The horizontal axis is labeled 'Travel (mm)' and ranges from 0 to 4 in increments of 1. Two curves are shown: an upper curve representing the 'Operating Point' and a lower curve representing the 'Reset Point'. Both curves start at approximately 30 gf at 0 mm travel and rise to about 50 gf at 4 mm travel. The 'Operating Point' curve has a slight upward slope, while the 'Reset Point' curve is slightly lower and flatter.</p>	See page 11
7.2	Loading parameter	<p>Place the vertical direction of switch operation and gradually increase the load applied to the center of the stem until it stop.</p>  <p>The diagram shows a cross-section of a switch mechanism with various loading points and dimensions. Labels include: 'TF' (Top Force) at the top of the stem, 'OF' (Offset Force) at the top of the stem, 'TTF' (Top Travel Force) at the top of the stem, and 'RF' (Reset Force) at the bottom of the stem. Dimensions include 'R' (radius), 'OP' (Operating Point), and 'Mounting Surface' at the base of the switch.</p>	See page 11

7.3	Static Strength	<p>A static load of 3kgf shall be applied in the direction of button operation for a period of 60 seconds.</p> 	<p>No damage (Electrical) And mechanical</p>
7.4	Stem Pull Strength	<p>Break by a pull force applied opposite to the direction of stem operation.</p>	<p>5kgf Min</p>
7.5	Shock	<p>Measured by according to the below condition: (1) Acceleration: 80g (2) Cycles of test: 3 cycles each in 6 directions, for a total of 18 cycles.</p> 	<p>Shall meet No.6, 7.1, 7.2.</p>
7.6	Life Test	<ol style="list-style-type: none"> 1) D.C.12V 10mA resistance load 2) Operation speed: 5-6 times / s 3) Push force: 150gf 4) Operation number: 50,000,000 cycles 	<p>Contact resistance: 1Ω Max Bouncing: 10ms Max Operation force and tactile force: Variation rate within ±30%</p>


8. Environmental Performance

Item	Description	Test Condition	Requirement												
8.1	Cold test	(1) Temperature: $-20\pm 2^{\circ}\text{C}$ (2) Duration of test: 48h (3) Take off a drop water (4) Standard conditions after test: 1h	Contact resistance: 200mΩ Max Shall meet: No. 6.2 to 6.4 No. 7.1 to 7.2												
8.2	Heat test	(1) Temperature: $70\pm 2^{\circ}\text{C}$ (2) Duration of test: 48h (3) Take off a drop water (4) Standard conditions after test: 1h	Contact resistance: 200mΩ Max Shall meet: No. 6.2 to 6.4 No. 7.1 to 7.2												
8.3	Temperature cycle	(1) Test cycles: 5 cycles (2) Standard condition after test: 1h <table border="1"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration of test</th> </tr> </thead> <tbody> <tr> <td rowspan="4">1 cycle</td> <td>$20\pm 5^{\circ}\text{C}$</td> <td>1h</td> </tr> <tr> <td>$-20\pm 5^{\circ}\text{C}$</td> <td>1h</td> </tr> <tr> <td>$20\pm 5^{\circ}\text{C}$</td> <td>1h</td> </tr> <tr> <td>$70\pm 5^{\circ}\text{C}$</td> <td>1h</td> </tr> </tbody> </table>		Temperature	Duration of test	1 cycle	$20\pm 5^{\circ}\text{C}$	1h	$-20\pm 5^{\circ}\text{C}$	1h	$20\pm 5^{\circ}\text{C}$	1h	$70\pm 5^{\circ}\text{C}$	1h	Contact resistance: 200mΩ Max Shall meet: No. 6.2 to 6.4 No. 7.1 to 7.2
	Temperature	Duration of test													
1 cycle	$20\pm 5^{\circ}\text{C}$	1h													
	$-20\pm 5^{\circ}\text{C}$	1h													
	$20\pm 5^{\circ}\text{C}$	1h													
	$70\pm 5^{\circ}\text{C}$	1h													

8.4

Soldering heat test

Soldering area: T/2 of PWB thickness.
(PWB: T=1.6mm)
Soldering temperature: $260\pm 5^{\circ}\text{C}$
Soldering time: $5\pm 0.5\text{s}$

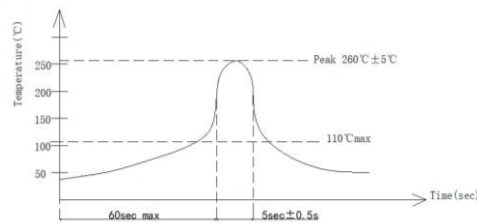

Appearance:
No abnormality.

8.5

Solder ability

Lead-tin soldering:
Soldering temperature: $245\pm 5^{\circ}\text{C}$
soldering time: $5\pm 0.5\text{s}$


Lead free soldering:
Soldering temperature: $255\pm 5^{\circ}\text{C}$
soldering time: $5\pm 0.5\text{s}$

At least 90% of surface area
of immersed portion shall be
covered by solder.

8.6	Humidity test	(1) Temperature: 60±2°C (2) relative humidity: 90~95% R.H. (3) Duration of test: 48h (4) Take off a drop water (5) Standard conditions after test: 1h	Contact resistance: 200mΩ Max Shall meet : No. 6.2 to 6.4 No. 7.1 to 7.2
8.7	Salt Spray	Apply the following environment to test(Only for contact test) : (1) Temperature: 35±5°C (2) Salt water density: 5±1% (3) Duration: 12hours (4) After test, the salt deposit shall be removed by running water.	Appearance: No corrosion spot, no crack, no base plate naked. Contact Resistance: 200 mΩ Max
8.8	Protection Against ingress of dust(IP5X)	The switches are placed in a position of normal use inside the test chamber. The test is carried out according to the second enclosure of IEC60529/GB4208. The test shall be continued for a period of 8h.	After test: Operating is normal Between terminals, terminal and surface of the crust, Dielectric withstand in voltage ≥100V
8.9	Protection against ingress of water(IPX4)	The switches are placed in a position of normal use inside the test table. The test is carried out according to the second enclosure of IEC60529/GB4208.	After test: Operating is normal. Water don't enter electric parts of the switch inside. Between terminals, terminal and surface of the crust, Dielectric withstand in voltage ≥100V

9. Recommended PCB Layout


Mounting Options

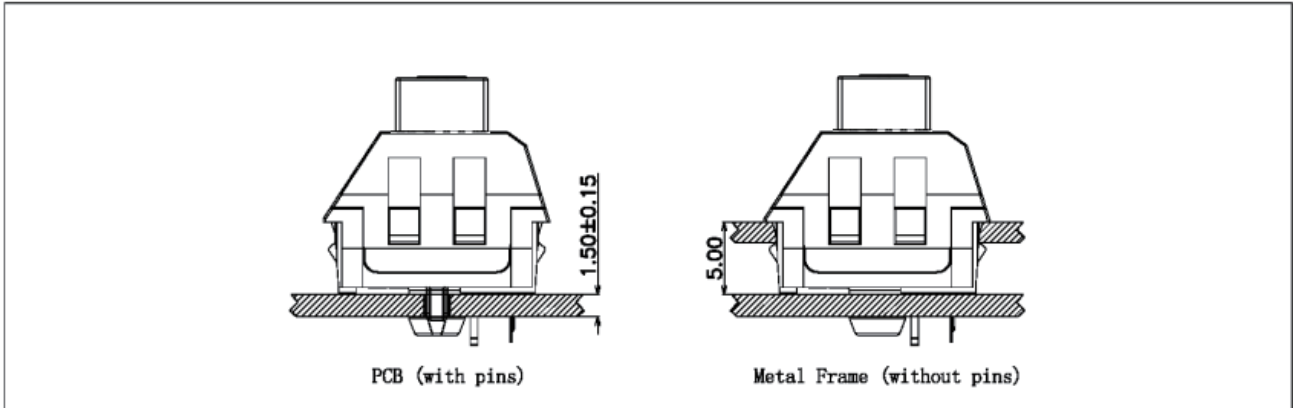


Circuit Board Layouts

Grid line spacing = 1.27mm


Keyswitch without fixation pins

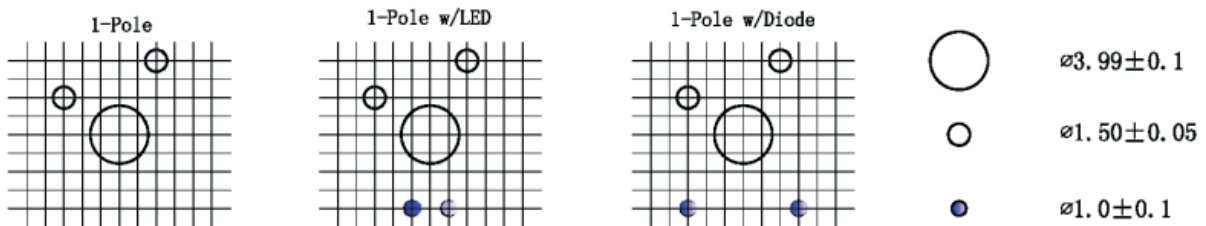

Keyswitch with fixation pins

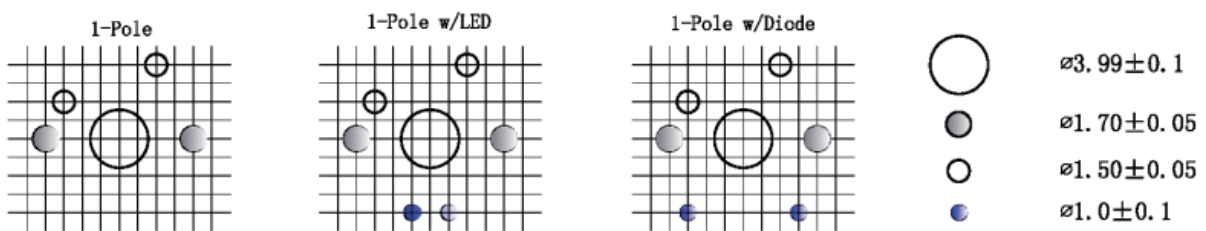

Metal Frame Cutout Dimensions

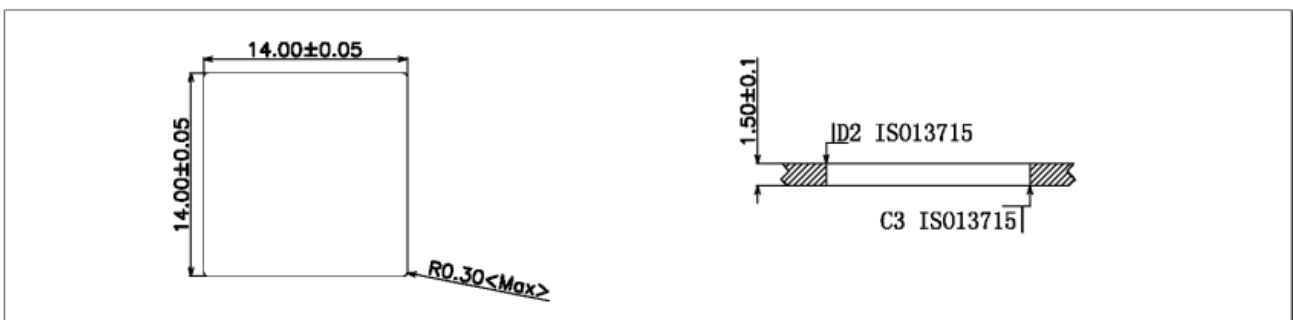

10. Loading Parameter (TT/PT/OT /OF) Specification

Parameter	Unit	Specification	Remark
TT	mm	4.0 ± 0.3	
PT	mm	1.70 ± 0.4	
OT	mm	1.6	Min
OF	gf	45 ± 10	

11. Precaution

11.1 Immersion Soldering condition

ITEM	CONDITION
Preheat temperature	110°C Max (Ambient temperature of soldering surface of P.W.B)
Preheat time	60s, Max
Area of flux	1/2 Max of PWB Thickness
Temperature of solder	260±5°C
Time of immersion	Soldering time: 5±0.5s
Number of soldering	2time Max (But should down heat of the first soldering)
Printed wiring board	Single side copper-clad laminates

- (1) After switches were soldered, please be careful not to clean switches with solvent.
- (2) Under the condition of using soldering iron, soldering temperature shall be 350°C±5°C with 3±0.5s.

11.2 Notes

- (1) Please be cautious not to give excessive static load or shock to switches.
- (2) Please be careful not to stack up P. W. B. after switches were soldered.
- (3) Preservation under high temperature and high humidity or corrosive gas should be avoided Especially.
When you need to preserve for a long period, do not open the carton.
- (4) The standard storage period is 3 months, with maximum up to 6months, preferably to be used as soon as possible.
After opening the package, you should put the remaining switches in a plastic bag to prevent from damp and corrosive gas.
- (5) This Product Specification is considered as the technical agreement on product between the receiving customer and Kailh. Any information on Product Catalogue which is in conflict with or different from the corresponding information of this document is considered as invalid.
- (6) It will be considered that customer already confirmed and accepted this specification if customer issue purchase order to us directly.
- (7) If there is no order or no request for new specification after 1 year upon this specification is issued, the specification will be regarded as invalid.
- (8) Products meet the ROHS & REACH environmental management substances control standards.