

# COLLECTION ABSTRACT COLOR GRAPHITE

ITEM NUMBER **ABS6006**  
APPLICATION **FLOOR, WALL**

## PRODUCT INFO

NOMINAL SHEET SIZE	8" x 9" HEXAGON
ACTUL SHEET SIZE	7.87" x 9.45" HEXAGON
MATERIAL	PORCELAIN
FINISH	MATTE
THICKNESS	10 MM
RECTIFIED	NO
FACES	24
VARIATION	V1 UNIFORM
COUNTRY OF ORIGIN	SPAIN
CERTIFICATIONS	RECYCLED CONTENT

## TESTING


DCOF WET	≥ 0.42
BREAKING STRENGTH UNI EN ISO 10545/4	≥ 1600-2400 N ≥ 35-45 N/MM <sup>2</sup>
CHEMICAL RESISTANCE UNI EN ISO 10545/13	A
STAIN RESISTANCE UNI EN ISO 10545/14	CLASS 5
WATER ABSORPTION UNI EN ISO 10545/3	≤ 0.5%
PEI/ABRASION ASTM C1027	2
VOC	CERTIFIED VOC FREE
RECYCLED CONTENT	YES
FROST RESISTANT	YES
HEAT RESISTANT	YES
DIRECT SUNLIGHT	YES

## INSTALLATION

RECOMMENDED GROUT JOINT	2 MM
SEALING REQUIRED	NO
SEALING RECOMMENDED	YES
RECOMMENDED PATTERNS	PER HEXAGON SHAPE

## PACKAGING

SOLD BY	BOX
SHEETS/BOX	25
SQ FT/BOX	9.9 SF
SQ FT/PIECE	0.40 SF
WEIGHT/SHEET	40.7 LBS

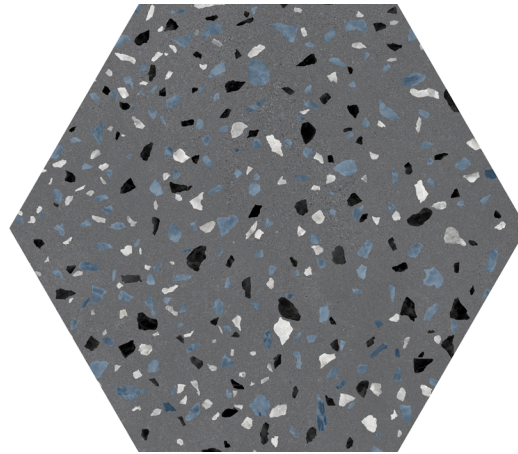

## USAGE

COMMERCIAL FLOORS	YES
RESIDENTIAL FLOORS	YES
RAMPS & INCLINES	NO
SHOWER WALL	YES
SHOWER FLOOR	YES
STEAM/SAUNA WALL	YES
STEAM/SAUNA FLOOR	NO
FIREPLACE SURROUND	YES

## POOL USAGE

POOL DECK	NO
POOL WATERLINE	YES
POOL SUBMERGED	YES
SPA/HOT TUB	YES

## EXTERIOR USAGE      FREEZING      NON-FREEZING

EXTERIOR COVERED WALL	YES	YES
EXTERIOR UNCOVERED WALL	YES	YES
EXTERIOR COVERED FLOOR	YES	YES
EXTERIOR UNCOVERED FLOOR	YES	YES

## ADDITIONAL INFORMATION

PLEASE VISIT [GLAZZIOSURFACES.COM](http://GLAZZIOSURFACES.COM) FOR ADDITIONAL PRODUCT INFORMATION INCLUDING INSTALLATION INSTRUCTIONS AND CARE & MAINTENANCE GUIDELINES.

ACTUAL COLOR, SIZE, AND TEXTURE MAY VARY. PLEASE REFER TO SAMPLE CHIP FOR VISUAL ACCURACY.

glazzio  
**SURFACES**