


MOTOR SPECIFICATION

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION

80855BNVA-A12

Q.R. No.	7979	CUSTOMER NO.	17847
CUSTOMER	BRIVIS (FASCO AUSTRALIA)		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty A.O.M.
	RPM.	1400	2.4 AMPS
	NOM. OUTPUT	315 WATTS	
ROTATION	ANTICLOCK WISE AT DRIVE END		
CAPACITOR	START	-----	μF/V RUN 8/440 μF/V
ENCLOSURE	FULLY VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN - SHAFT HORIZONTAL		
BEARING D.E.	6202 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU		
SUPPLY LEAD	FLEX 1100 ±30 GREY		
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	305-570-16	PAINT/ COLOUR	PC GREY CASE PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP85179-01		
CONNECTION DIAGRAM	393-531-02	RATING LABEL	563-04.FMT

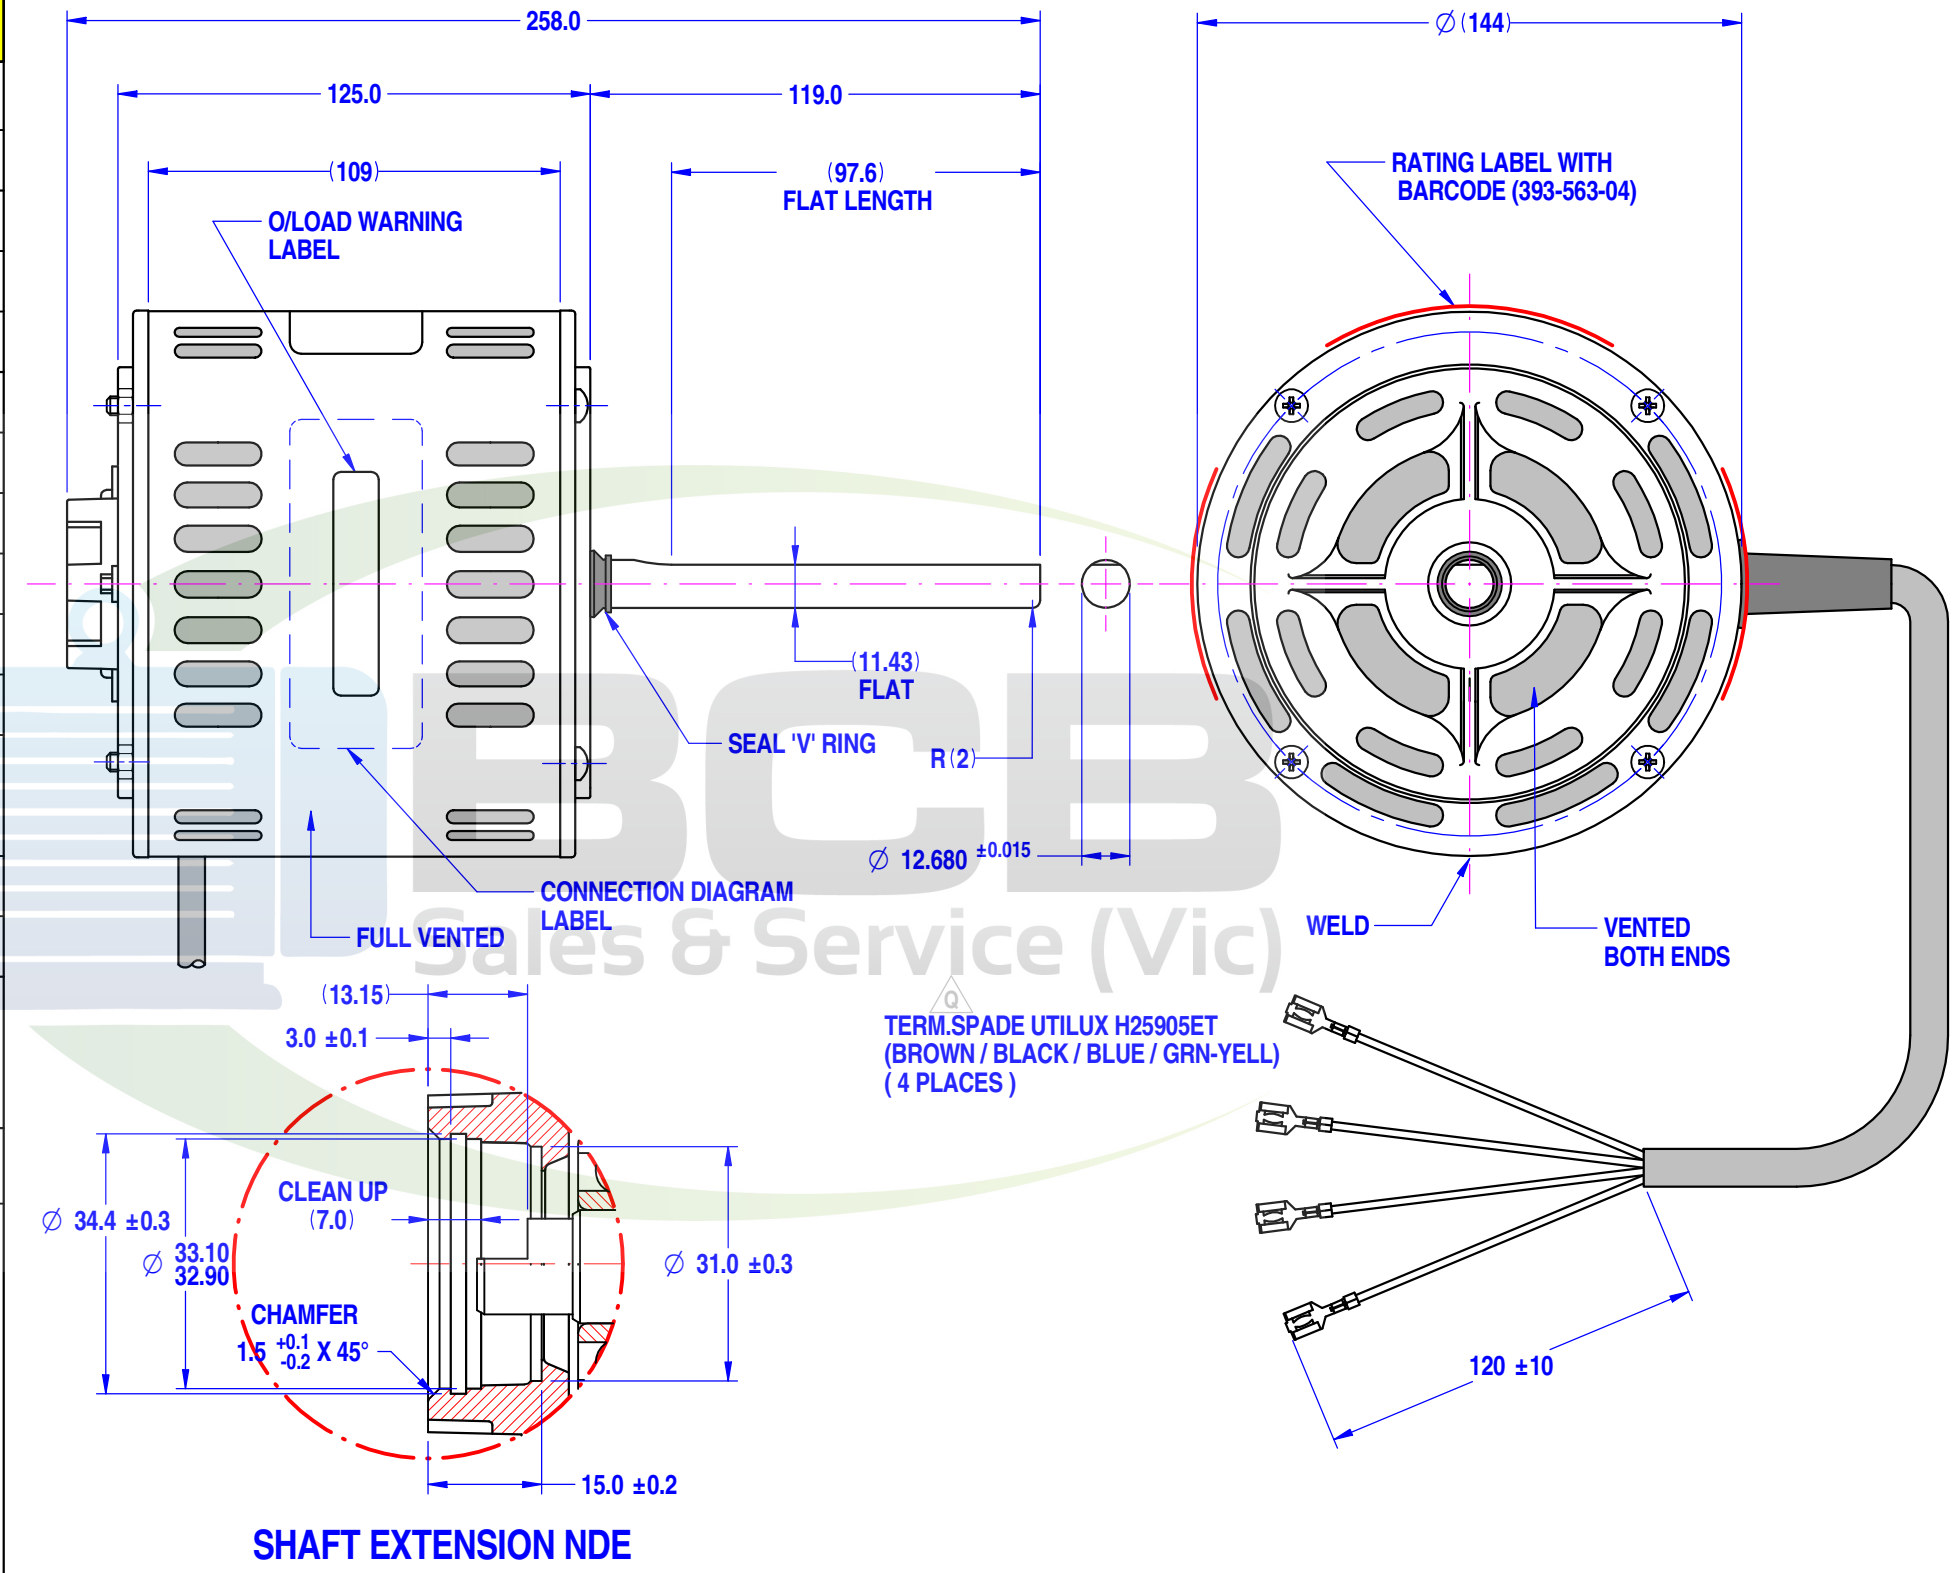

315W COOLER 17847

MODEL 80855BNVA-A12

ddmmyyxxxx

FASCO S/N

N693

VOLTS 240 R.P.M. 1400 CLASS B130 Hz 50
 WATTS 315 TYPE CSR μF/V S NIL Ph 1
 AMPS 2.4 DUTY AOM μF/V R 8/440 PROT. AUTO

SPECIAL REQUIREMENTS:

- 1)_CAPACITOR SUPPLIED BY CUSTOMER.
- 2)_STAMP MODEL NUMBER AND CUSTOMER NUMBER ON BULKPACK.

UNLESS OTHERWISE SPECIFIED :
 DIMENSIONS ARE IN MM.
 TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.1	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

MOTOR WEIGHT	8.0 kg.	
DRAWN	Veeranut	14/05/2018
CHECKED	Pipat	15/05/2018
RELEASED	Kanapote	21/05/2018
SCALE	N.T.S.	

29/7-8 MOO 3, BANGKRUAY - SAINOI Rd.,
 BANGKRANG, MUANG NONHABURI DISTRICT,
 NONHABURI 11000 THAILAND

FRAME	MOTOR	
STATUS	R	
SHEET	A3	
DWG. NO.	80855BNVA-A12	
REVISION	R	

MIC1802049 By: Veeranut Date: 14/05/2018 MIC R: CHANGE LABEL CONNECTION TO 393-531-02