


THIRD ANGLE PROJECTION

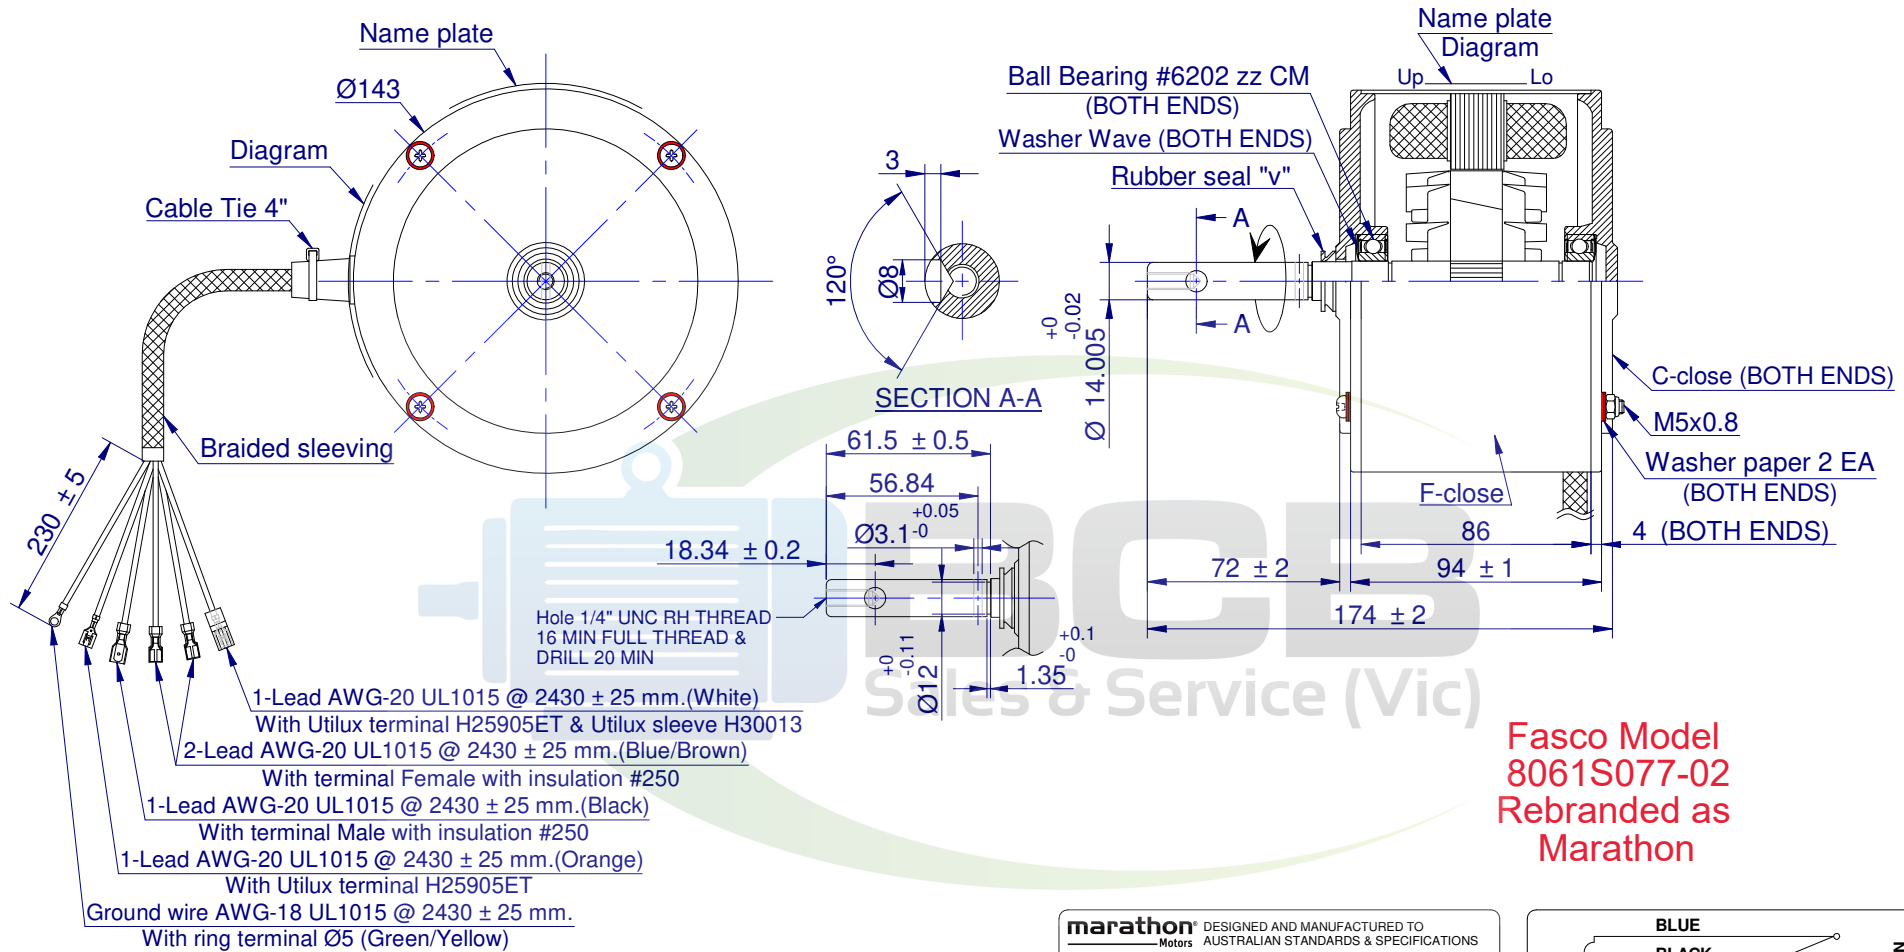


Fasco Model 8061S077-02
Rebranded as **Marathon**

marathon Motors DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

MODEL	8M61S077-02S		
	DDMMYYXXXX		

VOLTS 240 R.P.M. 920 CLASS B130 Hz 50
 WATTS 65 TYPE CSR μ F/V R 2/440 Ph 1
 AMPS 0.7 DUTY S1 AOM PROT. AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

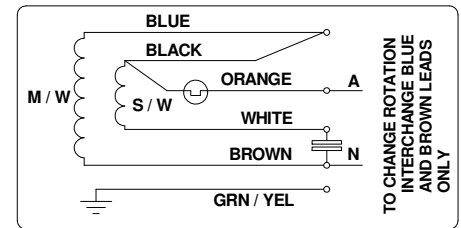

MOTOR SPECIFICATION									
Q.R. NO.	QR220071			CUSTOMER PART NO.	8061S077-02S				
MOTOR RATING	VOLTS	240	Hz	50	PH	1	DUTY	A.O.M.	
	RPM.	920					0.7	AMPS	
	NOM. OUTPUT	60 WATTS							
ROTATION	REVERSIBLE								
CAPACITOR	START	---	μ F/V	RUN	2/440 μ F/V				
MOTOR TYPE	CSR		INSULATION CLASS			B130			
THERMAL PROTECTION	AUTO RESET OVERLOAD								
DATA TEST NO.	W443-2967-SL		PAINT/COLOUR	GREY #5082					

- SPECIAL REQUIREMENTS:**
- 1) After the motor is complete, applied rust proof oil at shaft end.
 - 2) The tensile strength of each lead wire at least 4 Kgs.
 - 3) The runout of the shaft end circumference 0.08 mm.
 - 4) Capacitor supplied by customer.
 - 5) Motor to be packed in single carton.
 - 6) This motor is totally enclosed IP44

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES			MOTOR WEIGHT		

DECIMALS		ANGULAR	kg.		
X ± 1.0		± 30'			
.XX ± 0.1					
THIS DRAWING REMAINS THE PROPERTY OF REGAL BELOIT AUSTRALIA AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM REGAL BELOIT AUSTRALIA					
DRAWN	THANATCHA	12/10/2023			
CHECKED	EKAPHOP	12/10/2023			
RELEASED	WEERAPAN	12/10/2023			
SCALE	N.T.S.				

BCB
Sales & Service (Vic)
sales@bcbsales.com.au
03 9546 3833

FRAME	MOTOR		
STATUS	R		
SHEET	DWG. NO.		REVISION
A3	8M61S077-02S		B

DOC No. ...
By: Thanatcha
Date: 12/10/2023
DOC No. Add note "This motor is totally enclosed IP44"