


THIRD ANGLE PROJECTION

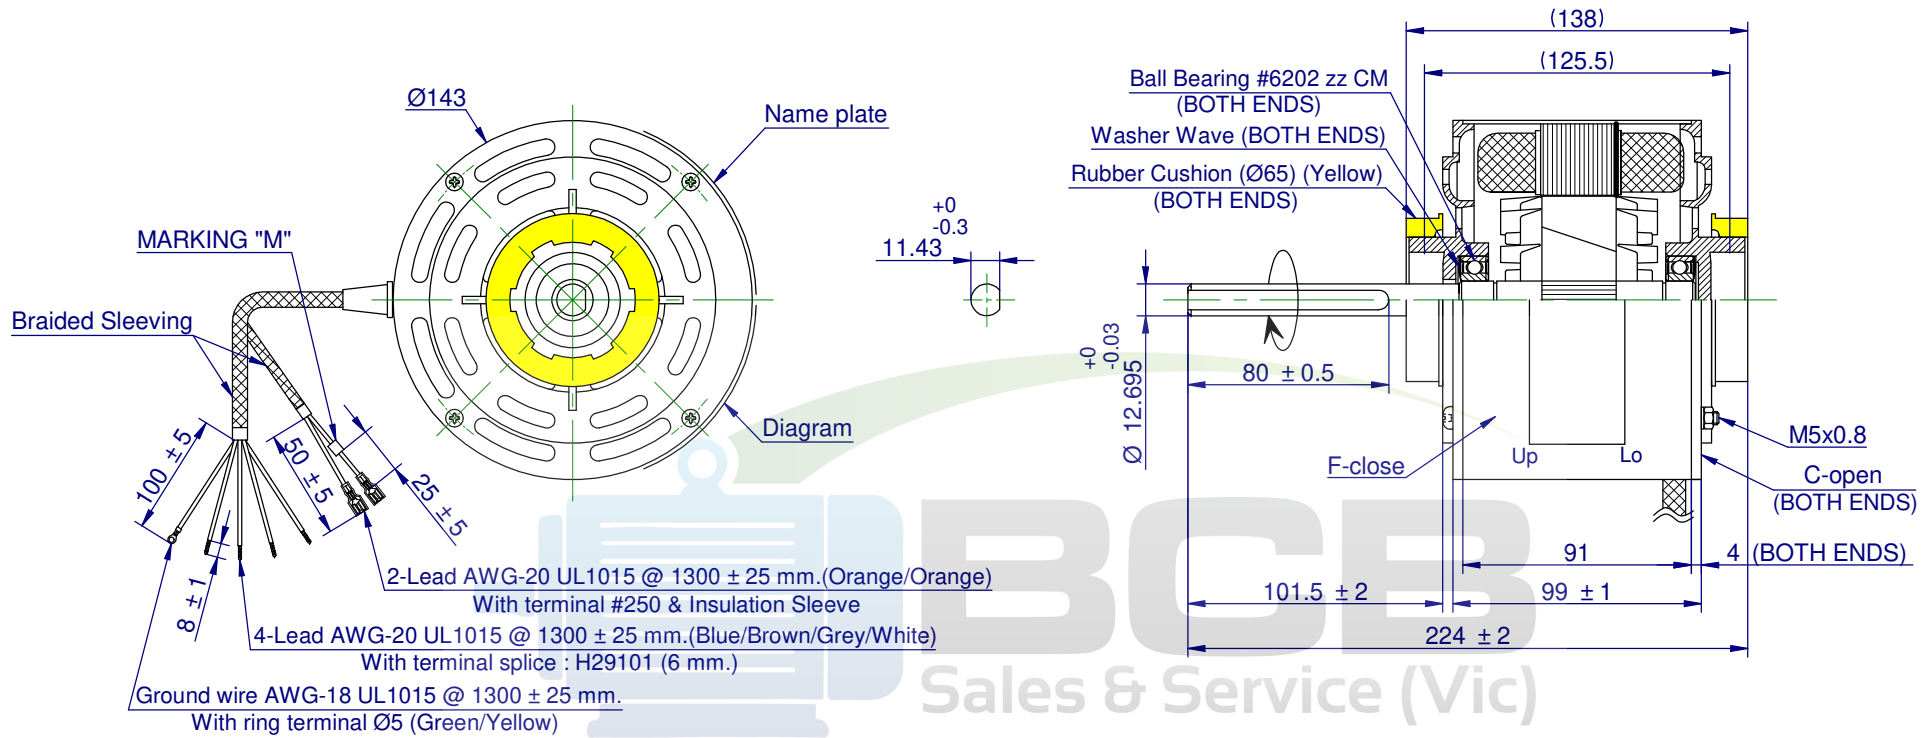

**Fasco Model  
808555MVA-A22  
Rebranded as  
Marathon**

MOTOR SPECIFICATION									
Q.R. NO.	QR230026			CUSTOMER PART NO.	808555MVA-A22				
MOTOR RATING	VOLTS	240	Hz	50	PH	1	DUTY	A.O.M.	
	RPM.	1350/3SP			1.8				
	NOM. OUTPUT	250 WATTS							
ROTATION	CLOCK WISE AT DRIVE END								
CAPACITOR	START	---	µF/V	RUN	8/400				
MOTOR TYPE	CSR		INSULATION CLASS			B130			
THERMAL PROTECTION	AUTO RESET OVERLOAD								
DATA TEST NO.	W443-2881-SL		PAIN/ COLOUR	GREY #5082					


- SPECIAL REQUIREMENTS:**
- 1) After the motor is complete, applied rust proof oil at shaft end.
  - 2) The tensile strength of each lead wire at least 4 Kgs.
  - 3) The runout of the shaft end circumference 0.10 mm.

**marathon** Motors DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

MODEL	8M8555MVA-A22		
	DDMMYYXXXX		

VOLTS 240 R.P.M. 1350/3SP CLASS B130 Hz 50  
WATTS 250 TYPE CSR µF/V R 8/400 Ph 1  
AMPS 1.8 DUTY AOM PROT. AUTO

**WARNING** MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

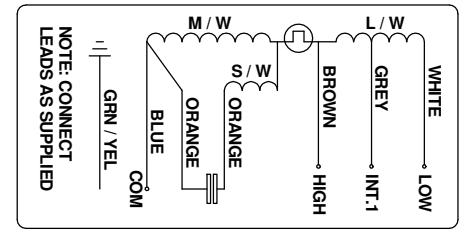

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.1	

MOTOR WEIGHT --- kg.

DRAWN	THANATCHA	12/05/2023
CHECKED	EKAPHOP	12/05/2023
RELEASED	WEERAPAN	12/05/2023
SCALE	N.T.S.	

THIS DRAWING REMAINS THE PROPERTY OF REGAL BELOIT AUSTRALIA AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM REGAL BELOIT AUSTRALIA

**BCB**  
Sales & Service (Vic)  
sales@bcbsales.com.au  
03 9546 3833

FRAME	MOTOR		
STATUS	250W 4P 3SP 240V S/S CW DE FASCO MODEL 808555MVA-A22		
SHEET	DWG. NO.	REVISION	
A3	8M8555MVA-A22	A	

DOC No. By: Date: DOC No. Note: