


CUSTOMER IS SOLELY RESPONSIBLE FOR MOTOR PERFORMANCE AND SUITABILITY IN APPLICATIONS FOR CUSTOMER'S USES.


THIS MOTOR IS INTENDED FOR SAMPLING AND CUSTOMER APPROVAL ONLY. NO APPLICATION FEES OR APPROVAL IS IMPLIED AS THAT CAN ONLY BE DETERMINED BY THE CUSTOMER.

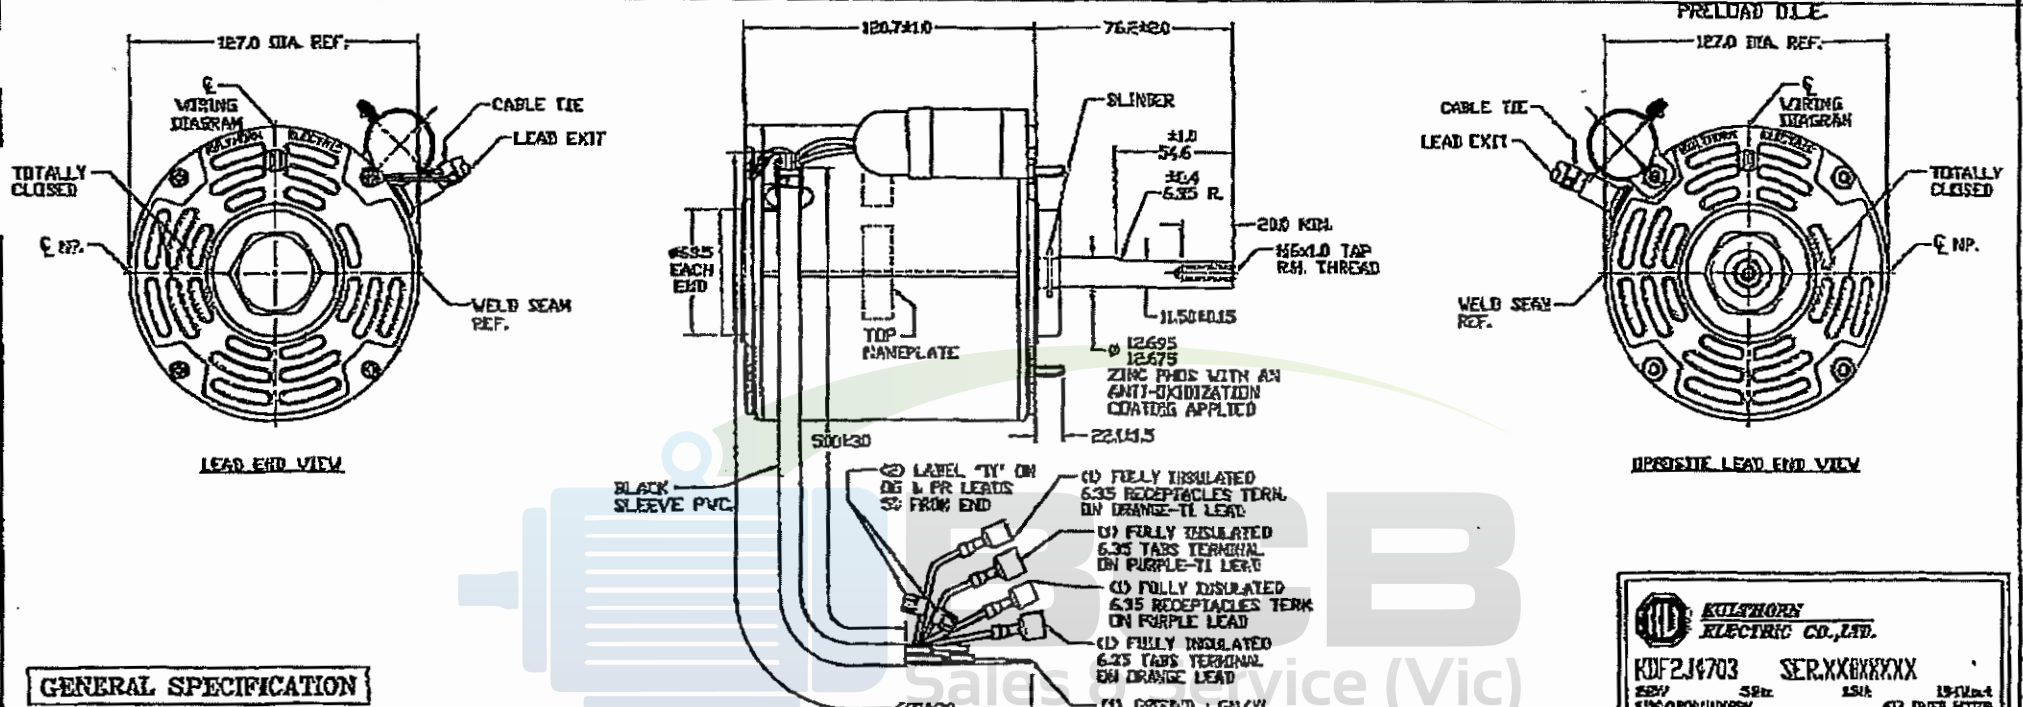

GENERAL SPECIFICATION

- | | |
|------------------------------|--|
| 1. MOTOR TYPE
MOTOR DUTY | CAPACITOR RUN MOTOR
CONTINUOUS AIR OVER MOTOR |
| 2. MOTOR MODEL | KDF2J4703 |
| 3. MOTOR DETAILS | 240V 50Hz 1.34A 1Ø 4P 194Wout
1300/1200/1100RPM
5 µF 440 VAC CAPACITOR
FAN BLADE
(4) M5 C-BOLTS EXTN. SIDE OF O.L.E.
EQUISPACED ON 117.5 P.C.D.
SPEC. NO. XXXX |
| APPLICATION MOUNTING | |
| 4. PERFORMANCE SPECIFICATION | |
| 5. MATERIAL DETAILS | COLD ROLLED STEEL
A0C 12 ALUMINIUM
S45C WITH ZINC PHOS. WITH AN ANTI-OXIDIZATION COATING
#6201 ZZ
#20 AWG. STANDARD COPPER WIRE
UL1015 60V 105°C PVC LEADS |
| (1) SHELL | |
| (2) END HEAD | |
| (3) SHAFT | |
| (4) BALL BEARING | |
| (5) LEAD WIRE (SINGLE CORE) | |
| 6. MECHANICAL SPECIFICATION | REVERSIBLE
SIDE OF OPPOSITE LEAD END
0.05mm T.I.R. MAX.
AT 15.0mm FROM SHAFT END |
| (1) ROTATION OF MOTOR | |
| (2) PRELOAD (WAVE WASHER) | |
| (3) CONCENTRICITY OF SHAFT | |

KULLSHORN ELECTRIC CO., LTD.
KDF2J4703 SER:XXXXXXXX
SERIAL NO. 5811
MFG. DATE 15/11/12
ALL OVER MOTOR YEARLY PROTECTED
MFG. IN CHINA

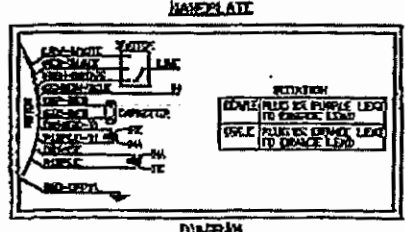

REV.	DATE	DESCRIPTION
REV. NO.	03/03/2012	
MOTOR MODEL	ELECTRICAL PER. SAMPLE NO.	ROTATION
KDF2J4703	K0945	REVERSIBLE
		WEIGHT
		Kg.
		CUSTOMER
DRAWN BY	CHECKED BY	APPROVED BY
PICHART		
UNIT	SCALE	DWG. NO.
□ INCH	NONE	

BCB SALES & SERVICE
PH : 03 9546 3833
FAX : 03 9546 3356

OUTLINE MOTOR DRAWING