

## GENERAL INFORMATION

# SPIKE®

Pin Anchor

### PRODUCT DESCRIPTION

The Spike is a, one-piece, vibration resistant anchor for use in concrete, block or stone. Several head styles, including tamperproof versions, and anchor materials are available. The Spike anchor is formed with an “s” shaped configuration at the working end of the anchor to create an expansion mechanism. Since the anchor is pre-formed, there is no secondary tightening operation required which greatly reduces the overall cost of an anchor installation.

### GENERAL APPLICATIONS AND USES

- Tamperproof applications
- Cable trays and strut
- Available in multiple head styles
- Guards and barriers
- Pipe hanging
- Metal track attachments
- Concrete formwork
- Safety posts

### FEATURES AND BENEFITS

- + Pre-expanded anchor design allows for easy installation
- + Mushroom and flat head Spike anchors are tamper-proof
- + Forming Spike, which is removable, can be used for temporary installations
- + Pipe and tie-wire Spike is a simple to install alternative to direct fastening (e.g. powder-actuated)

### APPROVALS AND LISTINGS

- Tested in accordance with ASTM E488

### GUIDE SPECIFICATIONS

CSI Divisions: 03 16 00 - Concrete Anchors, 04 05 19.16 - Masonry Anchors and 05 05 19 - Post-Installed Concrete Anchors. Anchors shall be Spike as supplied by DEWALT, Towson, MD. Anchors shall be installed in accordance with published instructions and the Authority Having Jurisdiction.

## MATERIAL SPECIFICATIONS

### Carbon Steel (Mushroom Head, Flat Head, Pipe, Tie-Wire and Forming Spike)


Anchor Component	Component Material
Anchor Body	AISI 1038 Carbon Steel
Zinc Plating	ASTM B633, SC1, Type III (Fe/Zn 5)

### Stainless Steel (Mushroom Head)

Anchor Component	Component Material
Anchor Body	Type 316L Stainless Steel

## SECTION CONTENTS

General Information.....	1
Material Specifications .....	1
Installation Specifications .....	2
Installation Instructions .....	2
Performance Data .....	3
Ordering Information.....	10

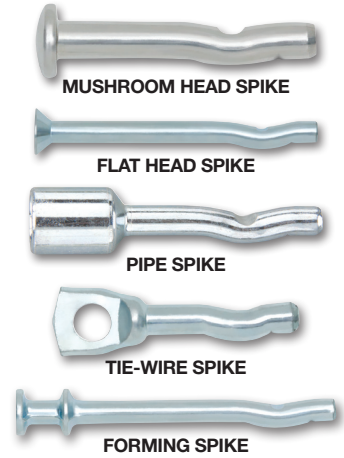

### HEAD STYLE

- Mushroom Head
- Flat Head
- Pipe (Coupler Head)
- Tie-Wire
- Forming

### ANCHOR MATERIALS

- Zinc Plated Carbon Steel
- 316 Stainless Steel

### ANCHOR SIZE RANGE (TYP)

- 3/16" through 1/2" diameters

### SUITABLE BASE MATERIALS

- Normal-Weight Concrete
- Lightweight Concrete
- Grouted Concrete Masonry (CMU)

**INSTALLATION SPECIFICATIONS**

**Mushroom Head Carbon Steel Spike**

Dimension	Nominal Anchor Size, d			
	3/16"	1/4"	3/8"	1/2"
ANSI Drill Bit Size (in.)	3/16	1/4	3/8	1/2
Fixture Clearance Hole (in.)	1/4	5/16	7/16	9/16
Head Height (in.)	7/64	7/64	7/32	1/4
Head Size, O.D. (in.)	7/16	1/2	3/4	1

**Flat Head Spike (80°– 82° Head)**

Dimension	Nominal Anchor Size, d	
	3/16"	1/4"
ANSI Drill Bit Size (in.)	3/16	1/4
Fixture Clearance Hole (in.)	1/4	5/16
Head Height (in.)	7/64	9/64
Head Size, O.D. (in.)	3/8	1/2

**Tie-Wire Spike**

Dimension	Nominal Anchor Size, d	
	3/16"	1/4"
ANSI Drill Bit Size (in.)	3/16	1/4
Tie-Wire Hole (in.)	3/16	9/32
Head Height (in.)	37/64	41/64
Head Width (in.)	9/64 x 7/16	3/16 x 9/16

**Mushroom Head Stainless Steel Spike**

Dimension	Nominal Anchor Size, d		
	3/16"	1/4"	3/8"
ANSI Drill Bit Size (in.)	3/16	1/4	3/8
Fixture Clearance Hole (in.)	1/4	5/16	7/16
Head Height (in.)	7/64	7/64	7/32
Head Size, O.D. (in.)	7/16	1/2	3/4

**Pipe Spike**

Dimension	Nominal Rod/Anchor Size, d	
	1/4"	3/8"
ANSI Drill Bit Size (in.)	3/16	1/4
Internal Thread Size (UNC)	1/4"-20	3/8"-16
Head Height (in.)	1/2	5/8
Head Size, O.D. (in.)	13/32	35/64


**Forming Spike**

Dimension	Nominal Anchor Size, d	
	3/16"	1/4"
ANSI Drill Bit Size (in.)	3/16	1/4
Fixture Clearance Hole (in.)	1/4	5/16
Head Height (in.)	9/16	9/16
Head Size, O.D. (in.)	13/32	1/2

**INSTALLATION INSTRUCTIONS**


**Mushroom/Flat Head Version**

Using the proper diameter bit, drill a hole into the base material to a depth of at least one anchor diameter deeper than the embedment required.




The tolerances of the drill bit used must meet the requirements of ANSI Standard B212.15

Remove dust and debris from the hole during drilling (e.g. dust extractor) or following drilling (e.g. suction, forced air) to extract loose particles created by drilling.




Manually drive anchors or power drive anchor using optional Spike Driver tool (mushroom head only). Drive the anchor through the fixture into the hole until the head is firmly seated against the fixture. Be sure the anchor is driven to the required embedment depth.




**Pipe Spike Version**

Using the proper diameter bit, drill a hole into the base material to a depth of at least one anchor diameter deeper than the embedment required.




The tolerances of the drill bit used must meet the requirements of ANSI Standard B212.15

Remove dust and debris from the hole during drilling (e.g. dust extractor) or following drilling (e.g. suction, forced air) to extract loose particles created by drilling.




Drive the anchor into the hole until the head is firmly seated against the base material. Be sure the anchor is driven to the required embedment depth.




**Tie-Wire Version**

Using the proper diameter bit, drill a hole into the base material to a depth of at least one anchor diameter deeper than the embedment required.




The tolerances of the drill bit used must meet the requirements of ANSI Standard B212.15

Remove dust and debris from the hole during drilling (e.g. dust extractor) or following drilling (e.g. suction, forced air) to extract loose particles created by drilling.




Drive the anchor into the hole until the head is firmly seated against the base material. Be sure the anchor is driven to the required embedment depth.




**Forming Spike Version**

Using the proper diameter bit, drill a hole into the base material to a depth of at least one anchor diameter deeper than the embedment required.




The tolerances of the drill bit used must meet the requirements of ANSI Standard B212.15

Remove dust and debris from the hole during drilling (e.g. dust extractor) or following drilling (e.g. suction, forced air) to extract loose particles created by drilling.



Drive the anchor through the fixture into the anchor hole until the head is firmly seated against the fixture. Be sure the anchor is driven to the required embedment depth.



## PERFORMANCE DATA

### Ultimate Load Capacities for Carbon Steel Spike in Normal-Weight Concrete<sup>1,2</sup>

Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f <sub>c</sub> )							
		2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	7/8 (22)	520 (2.3)	1,080 (4.9)	560 (2.5)	1,270 (5.7)	660 (2.9)	1,310 (5.9)	690 (3.1)	1,350 (6.1)
	1 (25)	540 (2.4)	1,230 (5.5)	620 (2.8)	1,725 (7.8)	780 (3.5)	1,860 (8.4)	795 (3.5)	1,860 (8.4)
	1-1/4 (32)	780 (3.5)	1,800 (8.1)	900 (4.0)	2,000 (9.0)	1,060 (4.7)	2,155 (9.7)	1,120 (5.0)	2,310 (10.4)
1/4	1 (25)	620 (2.8)	1,585 (7.1)	775 (3.4)	1,965 (8.8)	835 (3.7)	2,160 (9.7)	885 (3.9)	2,360 (10.6)
	1-1/4 (32)	830 (3.7)	1,815 (8.2)	1,100 (4.9)	2,020 (9.1)	1,210 (5.4)	2,220 (10.0)	1,320 (5.9)	2,585 (11.6)
3/8	1-3/4 (45)	1,785 (8.0)	3,645 (16.4)	2,120 (9.5)	4,480 (20.2)	2,630 (11.8)	5,025 (22.6)	2,875 (12.9)	5,075 (22.8)
1/2	2-1/2 (64)	3,215 (14.5)	5,345 (24.1)	3,620 (16.3)	8,460 (38.1)	4,015 (18.1)	10,320 (46.4)	4,410 (19.8)	10,860 (48.9)

1. Tabulated load values are for anchors installed in uncracked concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.

### Allowable Load Capacities for Carbon Steel Spike in Normal-Weight Concrete<sup>1,2,3</sup>



Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f <sub>c</sub> )							
		2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	7/8 (22)	130 (0.6)	270 (1.2)	140 (0.6)	320 (1.4)	165 (0.7)	330 (1.5)	170 (0.8)	340 (1.5)
	1 (25)	135 (0.6)	310 (1.4)	155 (0.7)	430 (1.9)	195 (0.9)	465 (2.1)	200 (0.9)	465 (2.1)
	1-1/4 (32)	195 (0.9)	450 (2.0)	225 (1.0)	500 (2.3)	265 (1.2)	540 (2.4)	280 (1.2)	580 (2.6)
1/4	1 (25)	155 (0.7)	395 (1.8)	195 (0.9)	490 (2.2)	210 (0.9)	540 (2.4)	220 (1.0)	590 (2.7)
	1-1/4 (32)	210 (0.9)	455 (2.0)	275 (1.2)	505 (2.3)	300 (1.3)	555 (2.5)	330 (1.5)	645 (2.9)
3/8	1-3/4 (45)	445 (2.0)	910 (4.1)	530 (2.4)	1,120 (5.0)	660 (3.0)	1,255 (5.6)	720 (3.2)	1,270 (5.7)
1/2	2-1/2 (64)	805 (3.6)	1,335 (6.0)	905 (4.1)	2,115 (9.5)	1,005 (4.5)	2,580 (11.6)	1,105 (5.0)	2,715 (12.2)

1. Allowable load capacities are calculated using an applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.
2. Linear interpolation may be used to determine allowable loads for intermediate embedments and compressive strengths.
3. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.

MECHANICAL ANCHORS

SPIKE<sup>®</sup>  
Pin Anchor

**Ultimate Load Capacities for Stainless Steel Spike in Normal-Weight Concrete<sup>1,2</sup>**

Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)							
		2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	7/8 (22)	490 (2.2)	920 (4.1)	560 (2.5)	1,155 (5.2)	660 (2.9)	1,220 (5.5)	690 (3.1)	1,290 (5.8)
	1 (25)	500 (2.3)	1,175 (5.3)	620 (2.8)	1,650 (7.4)	780 (3.5)	1,740 (7.8)	795 (3.5)	1,830 (8.2)
	1-1/4 (32)	740 (3.3)	1,735 (7.8)	900 (4.0)	1,930 (8.7)	1,060 (4.7)	2,040 (9.2)	1,120 (5.0)	2,150 (9.7)
1/4	1 (25)	620 (2.8)	1,565 (7.0)	775 (3.4)	1,845 (8.3)	835 (3.7)	2,095 (9.4)	885 (3.9)	2,250 (10.1)
	1-1/4 (32)	795 (3.6)	1,765 (7.9)	1,080 (4.9)	1,965 (8.8)	1,175 (5.2)	2,145 (9.7)	1,280 (5.7)	2,325 (10.5)
3/8	1-3/4 (45)	1,575 (7.1)	3,155 (14.2)	1,990 (9.0)	3,880 (17.5)	2,420 (10.9)	4,150 (18.7)	2,570 (11.6)	4,425 (19.9)

1. Tabulated load values are for anchors installed in uncracked concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.



**Allowable Load Capacities for Stainless Steel Spike in Normal-Weight Concrete<sup>1,2,3</sup>**

Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)							
		2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	7/8 (22)	125 (0.6)	230 (1.0)	140 (0.6)	290 (1.3)	165 (0.7)	305 (1.4)	170 (0.8)	325 (1.5)
	1 (25)	125 (0.6)	295 (1.3)	155 (0.7)	415 (1.9)	195 (0.9)	435 (2.0)	200 (0.9)	460 (2.1)
	1-1/4 (32)	185 (0.8)	435 (2.0)	225 (1.0)	485 (2.2)	265 (1.2)	510 (2.3)	280 (1.7)	540 (2.4)
1/4	1 (25)	155 (0.7)	390 (1.8)	195 (0.9)	460 (2.1)	210 (0.9)	525 (2.4)	220 (1.0)	565 (2.5)
	1-1/4 (32)	200 (0.9)	440 (2.0)	270 (1.2)	490 (2.2)	295 (1.3)	535 (2.4)	320 (1.4)	580 (2.6)
3/8	1-3/4 (45)	395 (1.8)	790 (3.6)	500 (2.3)	970 (4.4)	605 (2.7)	1,040 (4.7)	645 (2.9)	1,105 (5.0)

1. Allowable load capacities are calculated using an applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.
2. Linear interpolation may be used to determine allowable loads for intermediate embedments and compressive strengths.
3. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.

### Ultimate Load Capacities for Carbon Steel Pipe Spike in Normal-Weight Concrete<sup>1,2</sup>

Anchor Diameter d in.	Drill Bit Diameter in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)							
			2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4	3/16	1-1/4 (32)	780 (3.5)	975 (4.4)	1,260 (5.7)	975 (4.4)	1,260 (5.7)	975 (4.4)	1,260 (5.7)	975 (4.4)
3/8	1/4	1-3/4 (45)	1,100 (5.0)	1,815 (8.2)	1,660 (7.5)	2,020 (9.1)	2,000 (9.0)	2,100 (9.5)	2,000 (9.0)	2,180 (9.8)

1. Tabulated load values are for anchors installed in uncracked concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.



### Allowable Load Capacities for Carbon Steel Pipe Spike in Normal-Weight Concrete<sup>1,2,3</sup>

Anchor Diameter d in.	Drill Bit Diameter in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)							
			2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4	3/16	1-1/4 (32)	195 (0.9)	245 (1.1)	315 (1.4)	245 (1.1)	315 (1.4)	245 (1.1)	315 (1.4)	245 (1.1)
3/8	1/4	1-3/4 (45)	275 (1.2)	455 (2.0)	415 (1.9)	505 (2.3)	500 (2.3)	525 (2.4)	500 (2.3)	545 (2.5)

1. Allowable load capacities are calculated using an applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.
2. Linear interpolation may be used to determine allowable loads for intermediate compressive strengths.
3. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.

### Ultimate Load Capacities for Carbon Steel Tie-Wire Spike in Normal-Weight Concrete<sup>1,2</sup>

Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)					
		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	1-1/8 (29)	975 (4.4)	950 (4.3)	1,050 (4.7)	950 (4.3)	1,120 (5.0)	950 (4.3)
1/4	1-1/8 (29)	1,075 (4.8)	1,310 (5.9)	1,150 (5.2)	1,310 (5.9)	1,230 (5.5)	1,310 (5.9)

1. Tabulated load values are for anchors installed in uncracked concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.



### Allowable Load Capacities for Carbon Steel Tie-Wire Spike in Normal-Weight Concrete<sup>1,2,3</sup>

Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)					
		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	1-1/8 (29)	245 (1.1)	240 (1.1)	265 (1.2)	240 (1.1)	280 (1.3)	240 (1.1)
1/4	1-1/8 (29)	270 (1.2)	330 (1.5)	290 (1.3)	330 (1.5)	310 (1.4)	330 (1.5)

1. Allowable load capacities are calculated using an applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.
2. Linear interpolation may be used to determine allowable loads for intermediate compressive strengths.
3. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.

### Ultimate Load Capacities for Carbon Steel Forming Spike in Normal-Weight Concrete<sup>1,2</sup>

Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)							
		2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	1-1/4 (32)	780 (3.5)	1,800 (8.1)	1,000 (4.5)	2,000 (9.0)	1,260 (5.7)	2,155 (9.7)	1,260 (5.7)	2,310 (10.4)
1/4	1-1/4 (32)	830 (3.7)	1,815 (8.2)	1,200 (5.4)	2,020 (9.1)	1,410 (6.3)	2,220 (10.0)	1,410 (6.3)	2,585 (11.6)

1. Tabulated load values are for anchors installed in uncracked concrete. Concrete compressive strength must be at the specified minimum at the time of installation.  
2. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.

### Allowable Load Capacities for Carbon Steel Forming Spike in Normal-Weight Concrete<sup>1,2,3</sup>



Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)							
		2,000 psi (13.8 MPa)		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	1-1/4 (32)	195 (0.9)	450 (2.0)	250 (1.1)	500 (2.3)	315 (1.4)	540 (2.4)	315 (1.4)	580 (2.6)
1/4	1-1/4 (32)	210 (0.9)	455 (2.0)	300 (1.4)	505 (2.3)	355 (1.6)	555 (2.5)	355 (1.6)	645 (2.9)

1. Allowable load capacities are calculated using an applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.  
2. Linear interpolation may be used to determine allowable loads for intermediate compressive strengths.  
3. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.

### Ultimate Load Capacities for Spike in Lightweight Concrete<sup>1,2,3</sup>

Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)					
		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	1-1/8 (29)	440 (2.0)	1,280 (5.8)	400 (1.8)	1,280 (5.8)	380 (1.7)	1,280 (5.8)
1/4	1-1/8 (29)	480 (2.2)	1,720 (7.7)	440 (2.0)	1,720 (7.7)	400 (1.8)	1,720 (7.7)
3/8	1-3/4 (45)	1,140 (5.1)	3,000 (13.5)	960 (4.3)	3,000 (13.5)	800 (3.6)	3,000 (13.5)
1/2	2-1/2 (64)	1,860 (8.4)	6,440 (29.0)	1,860 (8.4)	6,440 (29.0)	1,860 (8.4)	6,440 (29.0)

1. Tabulated load values are applicable to carbon and stainless steel anchors.  
2. Tabulated load values are for anchors installed in uncracked concrete. Concrete compressive strength must be at the specified minimum at the time of installation.  
3. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety or overhead.

### Allowable Load Capacities for Spike in Lightweight Concrete<sup>1,2,3,4</sup>



Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Minimum Concrete Compressive Strength (f'c)					
		3,000 psi (20.7 MPa)		4,000 psi (27.6 MPa)		5,000 psi (34.5 MPa)	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	1-1/8 (29)	110 (0.5)	320 (1.4)	100 (0.5)	320 (1.4)	95 (0.4)	320 (1.4)
1/4	1-1/8 (29)	120 (0.5)	430 (1.9)	110 (0.5)	430 (1.9)	100 (0.5)	430 (1.9)
3/8	1-3/4 (45)	285 (1.3)	750 (3.4)	240 (1.1)	750 (3.4)	200 (0.9)	750 (3.4)
1/2	2-1/2 (64)	465 (2.1)	1,610 (7.2)	465 (2.1)	1,610 (7.2)	465 (2.1)	1,610 (7.2)

1. Tabulated load values are applicable to carbon and stainless steel anchors.  
2. Allowable load capacities are calculated using an applied safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.  
3. Linear interpolation may be used to determine ultimate loads for intermediate compressive strengths.  
4. The tabulated load values are applicable to single anchors installed at critical edge and spacing distances. Allowable load capacities are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances.

**Ultimate and Allowable Load Capacities for Spike Anchors in Concrete Over Steel Deck<sup>1,2,3,4</sup>**



Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	Lightweight Concrete Over Steel Deck f'c ≥ 3,000 psi (20.7 MPa)			
		Minimum 1-1/2" Wide Deck, 20 Gauge Minimum			
		Ultimate Load		Allowable Load	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	1-1/4 (32)	560 (2.5)	2,000 (9.0)	140 (0.6)	500 (2.3)
1/4	1-1/4 (32)	560 (2.5)	2,000 (9.0)	140 (0.6)	500 (2.3)
3/8	1-3/4 (45)	600 (2.7)	2,620 (11.8)	150 (0.7)	655 (2.9)
1/2	2-1/2 (64)	1,120 (5.0)	3,020 (13.6)	280 (1.3)	755 (3.4)

1. Tabulated load values are for mushroom head and flat head, carbon steel and stainless steel anchors installed in sand-lightweight or normal-weight concrete over steel deck. Concrete compressive strength must be at the specified minimum at the time of installation.
2. Allowable load capacities are calculated using a safety factor of 4.0. Consideration of safety factors of 10 or higher may be necessary depending on the application, such as life safety or overhead.
3. Spacing distances shall be in accordance with the spacing table for lightweight concrete.
4. Anchors are permitted to be installed in the lower or upper flute of the steel deck provided the proper installation procedures are maintained. Minimum lower flute edge distance is 7/8-inch.

**Ultimate and Allowable Load Capacities for Spike in Grouted Concrete Masonry<sup>1,2,3,4</sup>**



Anchor Diameter d in.	Minimum Embedment Depth in. (mm)	f'm ≥ 1,500 psi (10.4 MPa)							
		Minimum 6" Wide CMU							
		Ultimate Load				Allowable Load			
		Carbon Steel Spike		Stainless Steel Spike		Carbon Steel Spike		Stainless Steel Spike	
		Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
3/16	7/8 (22)	280 (1.3)	540 (2.4)	280 (1.3)	540 (2.4)	55 (0.2)	110 (0.5)	55 (0.2)	110 (0.5)
	1 (25)	410 (1.8)	590 (2.7)	310 (1.4)	590 (2.7)	80 (0.4)	120 (0.5)	60 (0.3)	120 (0.5)
	1-1/4 (32)	740 (3.3)	1,090 (4.9)	730 (3.3)	1,980 (8.9)	150 (0.7)	420 (1.9)	145 (0.7)	395 (1.8)
1/4	1 (25)	670 (3.0)	1,840 (8.3)	645 (2.9)	1,620 (7.3)	135 (0.6)	370 (1.7)	130 (0.6)	325 (1.5)
	1-1/4 (32)	800 (3.6)	2,100 (9.5)	770 (3.5)	1,890 (8.5)	160 (0.7)	420 (1.9)	155 (0.7)	380 (1.7)

1. Tabulated load values are for mushroom head and flat head, carbon steel and stainless steel anchors installed in minimum 6-inch wide, minimum Grade N, Type II, medium-weight or normal-weight concrete masonry units conforming to ASTM C90. Mortar must be minimum Type N. Masonry compressive strength must be at the specified minimum at the time of installation (f'm ≥ 1,500 psi).
2. Allowable load capacities listed are calculated using and applied safety factor of 5.0. Consideration of safety factors of 10 or higher may be necessary depending upon the application such as life safety, or overhead.
3. Linear interpolation may be used to determine allowable load capacities for intermediate embedments.
4. The tabulated values are for anchors installed at a minimum spacing and edge distance of 16 anchor diameters.

**Combined Loading**

For anchors loaded in both shear and tension, the combination of loads should be proportioned as follows:

$$\left(\frac{N_u}{N_n}\right) + \left(\frac{V_u}{V_n}\right) \leq 1$$

Where: N<sub>u</sub> = Applied Service Tension Load  
N<sub>n</sub> = Allowable Tension Load

V<sub>u</sub> = Applied Service Shear Load  
V<sub>n</sub> = Allowable Shear Load

**Load Adjustment Factors for Spacing and Edge Distances<sup>1</sup>**

**Anchor Installed in Normal-Weight Concrete**

Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing (s)	Tension and Shear	S <sub>cr</sub> = 2.0h <sub>v</sub>	F <sub>NIS</sub> = F <sub>VS</sub> = 1.0	S <sub>min</sub> = h <sub>v</sub>	F <sub>NIS</sub> = F <sub>VS</sub> = 0.50
Edge Distance (c)	Tension	C <sub>cr</sub> = 14d	F <sub>NC</sub> = 1.0	C <sub>min</sub> = 5d	F <sub>NC</sub> = 0.50
	Shear	C <sub>cr</sub> = 14d	F <sub>VC</sub> = 1.0	C <sub>min</sub> = 5d	F <sub>VC</sub> = 0.25

**Anchor Installed in Lightweight Concrete**

Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing (s)	Tension and Shear	S <sub>cr</sub> = 3.0h <sub>v</sub>	F <sub>NIS</sub> = F <sub>VS</sub> = 1.0	S <sub>min</sub> = 1.5h <sub>v</sub>	F <sub>NIS</sub> = F <sub>VS</sub> = 0.50
Edge Distance (c)	Tension	C <sub>cr</sub> = 14d	F <sub>NC</sub> = 1.0	C <sub>min</sub> = 7d	F <sub>NC</sub> = 0.50
	Shear	C <sub>cr</sub> = 14d	F <sub>VC</sub> = 1.0	C <sub>min</sub> = 7d	F <sub>VC</sub> = 0.40

1. Allowable load values found in the performance data tables are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances. Linear interpolation is allowed for intermediate anchor spacing and edge distances between critical and minimum distances. When an anchor is affected by both reduced spacing and edge distance, the spacing and edge reduction factors must be combined (multiplied). Multiple reduction factors for anchor spacing and edge distance may be required depending on the anchor group configuration.


**LOAD ADJUSTMENT FACTORS FOR NORMAL-WEIGHT CONCRETE**

**Spacing, Tension ( $F_{NS}$ ) & Shear ( $F_{VS}$ )**

Dia. (in.)	3/16				1/4			3/8	1/2
$h_v$ (in.)	7/8	1	1-1/8	1-1/4	1	1-1/8	1-1/4	1-3/4	2-1/2
$s_{cr}$ (in.)	1-3/4	2	2-1/4	2-1/2	2	2-1/4	2-1/2	3-1/2	5
$s_{min}$ (in.)	7/8	1	1-1/8	1-1/4	1	1-1/8	1-1/4	1-3/4	2-1/2
Distance (inches)	7/8	0.50	-	-	-	-	-	-	-
	1	0.57	0.50	-	0.50	-	-	-	-
	1-1/8	0.64	0.56	0.50	0.56	0.50	-	-	-
	1-1/4	0.71	0.63	0.56	0.50	0.63	0.56	-	-
	1-1/2	0.86	0.75	0.67	0.60	0.75	0.67	0.60	-
	1-3/4	1.00	0.88	0.78	0.70	0.88	0.78	0.70	0.50
	2	1.00	1.00	0.89	0.80	1.00	0.89	0.80	0.57
	2-1/2	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.71
	2-3/4	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.79
	3	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86
4	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
5	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	

Notes: For anchors loaded in tension and shear, the critical spacing ( $s_{cr}$ ) is equal to 2 embedment depths ( $2h_v$ ) at which the anchor achieves 100% of load.

Minimum spacing ( $s_{min}$ ) is equal to 1 embedment depth ( $h_v$ ) at which the anchor achieves 50% of load.




**Edge Distance, Tension ( $F_{NC}$ )**

Dia. (in.)	3/16	1/4	3/8	1/2	
$c_{cr}$ (in.)	2-5/8	3-1/2	5-1/4	7	
$c_{min}$ (in.)	1	1-1/4	1-7/8	2-1/2	
Distance (inches)	1	0.50	-	-	
	1-1/4	0.59	0.50	-	
	1-7/8	0.78	0.64	0.50	
	2	0.81	0.67	0.52	
	2-1/2	0.96	0.78	0.59	0.50
	2-5/8	1.00	0.81	0.61	0.51
	3	1.00	0.89	0.67	0.56
	3-1/2	1.00	1.00	0.74	0.61
	4	1.00	1.00	0.81	0.67
	5	1.00	1.00	0.96	0.78
5-1/4	1.00	1.00	1.00	0.81	
6	1.00	1.00	1.00	0.89	
7	1.00	1.00	1.00	1.00	

Notes: For anchors loaded in tension, the critical edge distance ( $c_{cr}$ ) is equal to 14 anchor diameters ( $14d$ ) at which the anchor achieves 100% of load.

Minimum edge distance ( $c_{min}$ ) is equal to 5 anchor diameters ( $5d$ ) at which the anchor achieves 50% of load.




**Edge Distance, Shear ( $F_{VC}$ )**

Dia. (in.)	3/16	1/4	3/8	1/2	
$c_{cr}$ (in.)	2-5/8	3-1/2	5-1/4	7	
$c_{min}$ (in.)	1	1-1/4	1-7/8	2-1/2	
Distance (inches)	1	0.25	-	-	
	1-1/4	0.39	0.25	-	
	1-7/8	0.67	0.46	0.25	
	2	0.72	0.50	0.28	
	2-1/2	0.94	0.67	0.39	0.25
	2-5/8	1.00	0.71	0.42	0.27
	3	1.00	0.83	0.50	0.33
	3-1/2	1.00	1.00	0.61	0.42
	4	1.00	1.00	0.72	0.50
	5	1.00	1.00	0.94	0.67
5-1/4	1.00	1.00	1.00	0.71	
6	1.00	1.00	1.00	0.83	
7	1.00	1.00	1.00	1.00	

Notes: For anchors loaded in shear, the critical edge distance ( $c_{cr}$ ) is equal to 14 anchor diameters ( $14d$ ) at which the anchor achieves 100% of load.

Minimum edge distance ( $c_{min}$ ) is equal to 5 anchor diameters ( $5d$ ) at which the anchor achieves 25% of load.






**LOAD ADJUSTMENT FACTORS FOR LIGHTWEIGHT CONCRETE**

**Spacing, Tension ( $F_{NS}$ ) & Shear ( $F_{VS}$ )**

Dia. (in.)	3/16				1/4			3/8	1/2	
	h. (in.)	7/8	1	1-1/8	1-1/4	1	1-1/8	1-1/4	1-3/4	2-1/2
$s_c$ (in.)	2-5/8	3	3-3/8	3-3/4	3	3-3/8	3-3/4	5-1/4	7-1/2	
$s_{min}$ (in.)	1-3/8	1-1/2	1-3/4	1-7/8	1-1/2	1-3/4	1-7/8	2-5/8	3-3/4	
Distance (inches)	1-3/8	0.50	-	-	-	-	-	-	-	
	1-1/2	0.55	0.50	-	-	0.50	-	-	-	
	1-3/4	0.65	0.58	0.50	-	0.58	0.50	-	-	
	1-7/8	0.70	0.63	0.54	0.50	0.63	0.54	0.50	-	
	2	0.75	0.67	0.58	0.53	0.67	0.58	0.53	-	
	2-1/2	0.95	0.83	0.73	0.67	0.83	0.73	0.67	-	
	2-5/8	1.00	0.88	0.77	0.70	0.88	0.77	0.70	0.50	
	2-3/4	1.00	0.92	0.81	0.73	0.92	0.81	0.73	0.52	
	3	1.00	1.00	0.88	0.80	1.00	0.88	0.80	0.57	
	3-3/4	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.71	0.50
	4	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.76	0.53
	4-1/2	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.60
	5	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.67
	5-1/2	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.73
	6	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.80
6-1/2	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.87	
7	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.93	
7-1/2	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	

Notes: For anchors loaded in tension and shear, the critical spacing ( $s_c$ ) is equal to 3 embedment depths ( $3h_v$ ) at which the anchor achieves 100% of load.

Minimum spacing ( $s_{min}$ ) is equal to 1.5 embedment depth ( $1.5h_v$ ) at which the anchor achieves 50% of load.




**Edge Distance, Tension ( $F_{NC}$ )**

Dia. (in.)	3/16		1/4		3/8		1/2	
	$c_c$ (in.)	2-5/8	3-1/2	5-1/4	7			
$c_{min}$ (in.)	1-3/8	1-3/4	2-5/8	3-1/2				
Distance (inches)	1-3/8	0.50	-	-	-			
	1-3/4	0.67	0.50	-	-			
	2	0.76	0.57	-	-			
	2-5/8	1.00	0.75	0.50	-			
	3	1.00	0.86	0.57	-			
	3-1/2	1.00	1.00	0.67	0.50			
	4	1.00	1.00	0.76	0.57			
	5	1.00	1.00	0.95	0.71			
	5-1/4	1.00	1.00	1.00	0.75			
	6	1.00	1.00	1.00	0.86			
7	1.00	1.00	1.00	1.00				

Notes: For anchors loaded in tension, the critical edge distance ( $c_c$ ) is equal to 14 anchor diameters ( $14d$ ) at which the anchor achieves 100% of load.

Minimum edge distance ( $c_{min}$ ) is equal to 7 anchor diameters ( $7d$ ) at which the anchor achieves 50% of load.




**Edge Distance, Shear ( $F_{VC}$ )**

Dia. (in.)	3/16		1/4		3/8		1/2	
	$c_c$ (in.)	2-5/8	3-1/2	5-1/4	7			
$c_{min}$ (in.)	1-3/8	1-3/4	2-5/8	3-1/2				
Distance (inches)	1-3/8	0.40	-	-	-			
	1-3/4	0.60	0.40	-	-			
	2	0.71	0.49	-	-			
	2-5/8	1.00	0.70	0.40	-			
	3	1.00	0.83	0.49	-			
	3-1/2	1.00	1.00	0.60	0.40			
	4	1.00	1.00	0.71	0.49			
	5	1.00	1.00	0.94	0.66			
	5-1/4	1.00	1.00	1.00	0.70			
	6	1.00	1.00	1.00	0.83			
7	1.00	1.00	1.00	1.00				

Notes: For anchors loaded in shear, the critical edge distance ( $c_c$ ) is equal to 14 anchor diameters ( $14d$ ) at which the anchor achieves 100% of load.

Minimum edge distance ( $c_{min}$ ) is equal to 7 anchor diameters ( $7d$ ) at which the anchor achieves 40% of load.



**ORDERING INFORMATION**

**Mushroom Head Spike (Tamperproof)**

Carbon Steel Cat. No.	Stainless Steel Cat. No.	Anchor Size	Pack Qty.	Carton Qty.
05502-PWR	06602-PWR	3/16" x 1"	100	1,000
05503-PWR	06603-PWR	3/16" x 1-1/4"	100	1,000
05504-PWR	06604-PWR	3/16" x 1-1/2"	100	1,000
05506-PWR	06606-PWR	3/16" x 2"	100	1,000
05508-PWR	-	3/16" x 2-1/2"	100	600
05510-PWR	-	3/16" x 3"	100	600
05511-PWR	-	3/16" x 3-1/2"	100	600
05512-PWR	-	3/16" x 4"	100	600
05522-PWR	-	1/4" x 1"	100	1,000
05523-PWR	06623-PWR	1/4" x 1-1/4"	100	1,000
05524-PWR	06624-PWR	1/4" x 1-1/2"	100	1,000
05526-PWR	06626-PWR	1/4" x 2"	100	600
05528-PWR	06628-PWR	1/4" x 2-1/2"	100	600
05530-PWR	06630-PWR	1/4" x 3"	100	600
05531-PWR	-	1/4" x 3-1/2"	100	600
05532-PWR	-	1/4" x 4"	100	600
05546-PWR	06646-PWR	3/8" x 2"	25	250
05548-PWR	06648-PWR	3/8" x 2-1/2"	25	150
05550-PWR	06650-PWR	3/8" x 3"	25	150
05551-PWR	-	3/8" x 3-1/2"	25	150
05552-PWR	-	3/8" x 4"	25	150
05554-PWR	-	3/8" x 5"	25	150
05556-PWR	-	3/8" x 6"	25	125
05569-PWR	-	1/2" x 2-3/4"	50	200
05571-PWR	-	1/2" x 3-1/2"	50	150
05572-PWR	-	1/2" x 4"	25	125
05574-PWR	-	1/2" x 5"	25	125
05577-PWR	-	1/2" x 6-1/2"	25	100



The published length is measured from below the head to the end of the anchor.  
Note: The actual nominal length of the 1" long mushroom head Spike anchor is 1-1/8" due to manufacturing tolerances.



**Flat Head Carbon Steel Spike (Tamperproof)**

Cat. No.	Anchor Size	Pack Qty.	Carton Qty.
05608-PWR	3/16" x 2-1/2"	100	600
05610-PWR	3/16" x 3"	100	600
05612-PWR	3/16" x 4"	100	600
05624-PWR	1/4" x 1-1/2"	100	1,000
05626-PWR	1/4" x 2"	100	600
05628-PWR	1/4" x 2-1/2"	100	600
05630-PWR	1/4" x 3"	100	600
05631-PWR	1/4" x 3-1/2"	100	600
05632-PWR	1/4" x 4"	100	500

The published length is the overall length of the anchor.



**Pipe Spike**

Cat.No.	Rod/Anchor Size	Shank Diameter	Pack Qty.	Carton Qty.
03755-PWR	1/4" x 1-1/4"	3/16"	100	600
03758-PWR	3/8" x 1-3/4"	1/4"	50	300

Designed for rod hanging. The published length is measured from below the head to the end of the anchor.



**Tie-Wire Spike**

Catalog Number	Anchor Size	Tie Wire Hole Size	Pack Qty.	Carton Qty.
03756-PWR	3/16" x 1-1/4"	3/16"	100	600
03759-PWR	1/4" x 1-1/4"	9/32"	100	600

Designed for suspended ceilings. The published length is measured from below the head to the end of the anchor.



**Forming Spike**

Cat. No.	Anchor Size	Pack Qty.	Carton Qty.
03795-PWR	3/16" x 1-1/2"	100	600
03796-PWR	3/16" x 2"	100	600
03797-PWR	3/16" x 2-3/4"	100	600
03794-PWR	1/4" x 2-3/4"	100	500

Designed for concrete forming. The published length is measured from below the head to the end of the anchor.



**Spike Driver**

Cat. No.	Anchor Size	Pack Qty.
03790-PWR	SPIKE Driver 1000	1

The SPIKE Driver 1000 is a proprietary tool designed to install mushroom head Spikes using a SDS-Plus Rotary Hammer in hammering only mode. The retractable guide aligns the anchor and the rotary hammer provides impact energy to the mushroom head, quickly driving the Spike into the hole.