


# MIB Pro 72 Technical Specifications

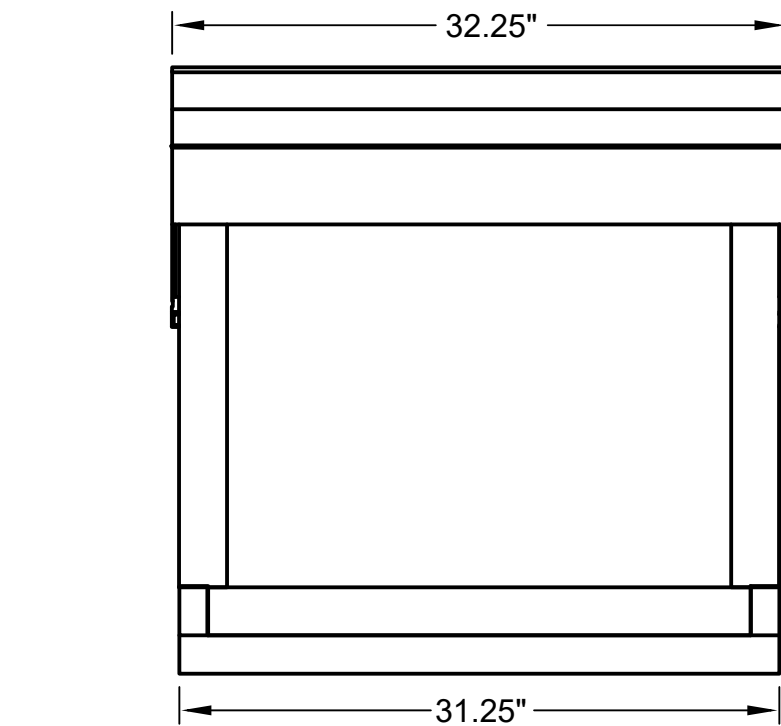

## Electrical Data

Voltage: 103-127 volts  
 Phase: 1  
 Frequency: 60 Hz  
 Amperage: 8.5 amps  
 GFCI Trip Level: 4mA~6mA UL/CUL Certified  
 Temperature control: Inkbird ITC-310

## Mechanical Data

Compressor: Tecumseh AE4450Y-AA1A  
 Operating temperature: 0-115 F  
 Refrigerant/Charge: R134a/12.1oz  
 Cooling Capacity: 6000 BTU/hr  
 Insulation rating: R9  
 Winterization Protection: 0 F

## Exterior Dimensions & Protection

Weight with lid (empty): 304 lbs  
 Weight with lid (filled 100 gal): 1100 lbs  
 Length: 93.88 in.  
 Width: 32.25 in.  
 Height with lid: 31.25 in.  
 Tub: 16 gauge 304 Stainless Steel  
 Floor skids: non marking composite plastic  
 Wood finish: exterior grade plyw with UV protection

## Water Treatment

Filtration Pump: Intex C1000  
 Mechanical Filter: Intex Type A (#29000E)  
 Mechanical Filtration: 50 microns  
 Ozone Generator: Del Ozone O3 Series UO3  
 Ozone Injection rate: 50 mg/hr nominal  
 Filtration Flow rate: ≤ 240 GPH  
 Tub capacity: 100 gal

info@morozkoforge.com  
 Morozko Forge  
 7150 W. Roosevelt Rd. A-161  
 Phoenix, AZ 85043