


## GH6000/3 7.5kVA HONDA

**7.5kVA**  
**HONDA**  
GH6000/3

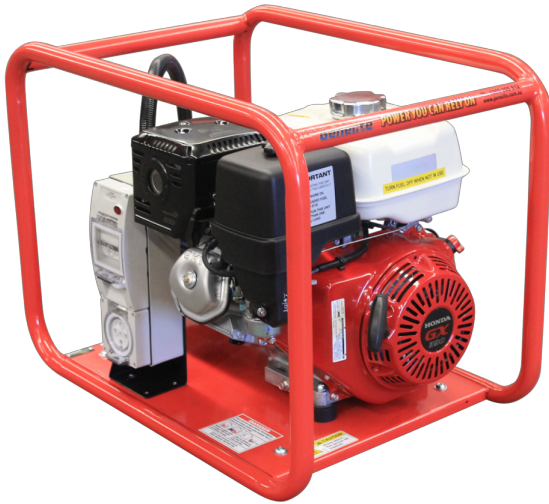

### ENGINE

<b>MANUFACTURER</b>	Honda
<b>ENGINE MODEL</b>	GX390
<b>TYPE &amp; CYLINDER</b>	O.H.V.
<b>STARTING</b>	Recoil
<b>RUN TIME</b>	2.6hr @ 100%, 3.8hr @ 60% load
<b>FUEL</b>	Unleaded Petrol
<b>CUBIC CAPACITY</b>	389 cm <sup>3</sup>
<b>HP 3000 RPM CONT</b>	8.0HP
<b>OIL CAPACITY</b>	1.1L

### TECHNICAL

<b>MODEL</b>	GH6000/3
<b>TYPE</b>	Portable
<b>FREQUENCY</b>	50Hz
<b>PHASE/VOLTAGE</b>	3/415

SPEED	POWER		NOISE LEVEL	FUEL CAPACITY	CONTINUOUS OUTPUT
	Max Power		dBA @7m see *1		
	kW	kVA	dBA		
3000RPM	6.0	7.5	72	6.1L	7.5kVA

### ADDITIONAL INFO

<b>OUTLETS</b>	1 x 10amp 415V 2 x 15amp 240V outlets switched with thermal overload
<b>FRAME</b>	Large roll frame

### DIMENSIONS

<b>LENGTH</b>	76cm
<b>WIDTH</b>	50cm
<b>HEIGHT</b>	57cm
<b>WEIGHT</b>	75kg

### ALTERNATOR

<b>ALTERNATOR BRAND</b>	Mecc Alte
<b>TYPE</b>	Brushless
<b>HARMONIC DISTORTION</b>	Less than 5%
<b>INSULATION CLASS</b>	Class H

### OPTIONS

- Hire Spec: 2 x IP56 rated outlets, circuit breaker & RCD protection.
- 2 or 4 wheel kit
- Extra large roll frame
- Long Range Tank