
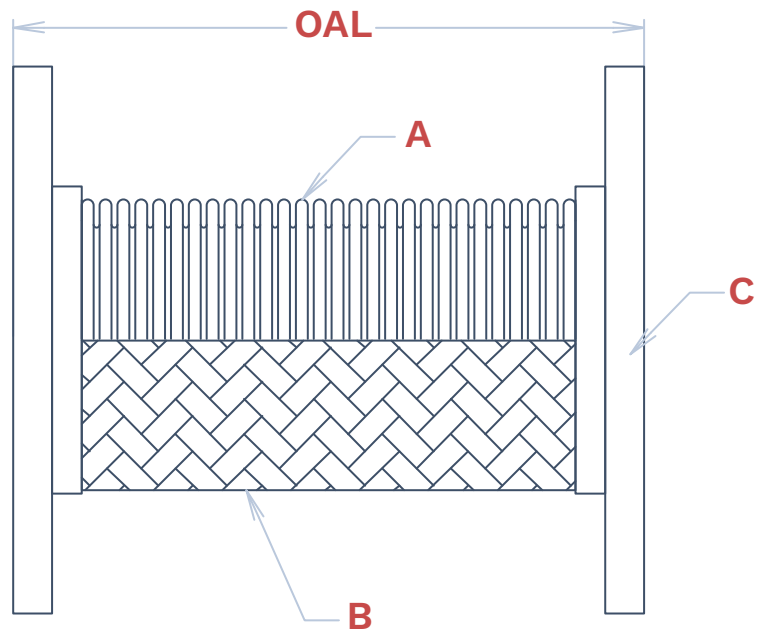


STYLE # PF

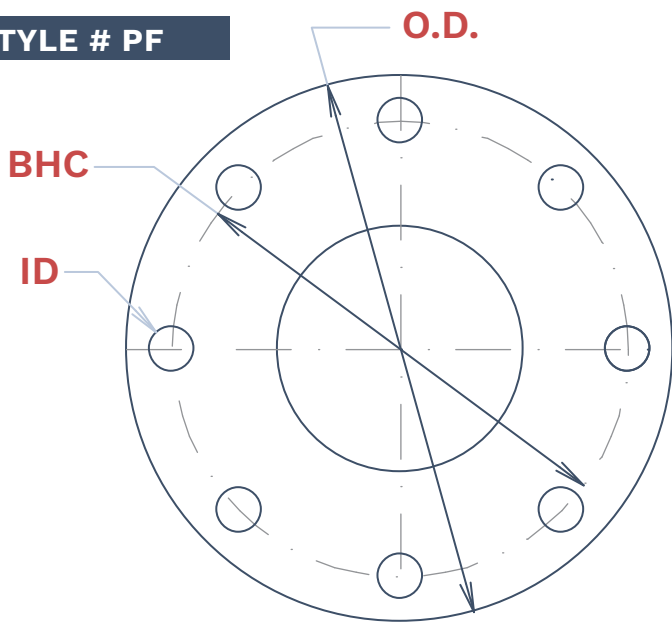

DESIGN

- A) Tube 321 Stainless Steel
- B) Braid 304 Stainless Steel
- C) Ends: Carbon Steel ANSI 150
- Misc.: 750 Degrees F
- Temp: 0.0"
- Axial: 0.125
- Lateral:

Special Notes:



GFM Part Number	Size Inches	Over All Length	Flange OD	Bolt Hole Center	No Bolt Holes	Hole Size	WORKING PRESSURE		Weight
							AT 70F	AT 250F	
PF-150	1-1/2	9.0"	5.0"	3.875"	4	0.625"	410	377	8.0
PF-200	2	9.0"	6.0"	4.75"	4	0.750"	300	276	11.0
PF-250	2-1/2	9.0"	7.0"	5.50"	4	0.750"	350	322	14.0
PF-300	3	9.0"	7.5"	6.00"	4	0.750"	300	276	15.0
PF-400	4	9.0"	9.0"	7.50"	8	0.750"	250	230	20.0
PF-500	5	11.0"	10.0"	8.50"	8	0.875"	175	161	28.0
PF-600	6	11.0"	11.0"	9.50"	8	0.875"	165	152	33.0
PF-800	8	12.0"	13.5"	11.75"	8	0.875"	174	160	52.0
PF-1000	10	13.0"	16.0"	14.25"	12	1.00"	180	165	74.0
PF-1200	12	14.0"	19.0"	17.00"	12	1.00"	130	119	100.0
PF-1400	14	14.0"	21.0"	18.75"	12	1.125"	150	138	110.0
PF-1600	16	14.0"	23.5"	21.25"	16	1.125"	110	101	198.0
PF-1800	18	14.0"	25.0"	22.75"	16	1.250"	85	78	295.0