

MIDTOWN







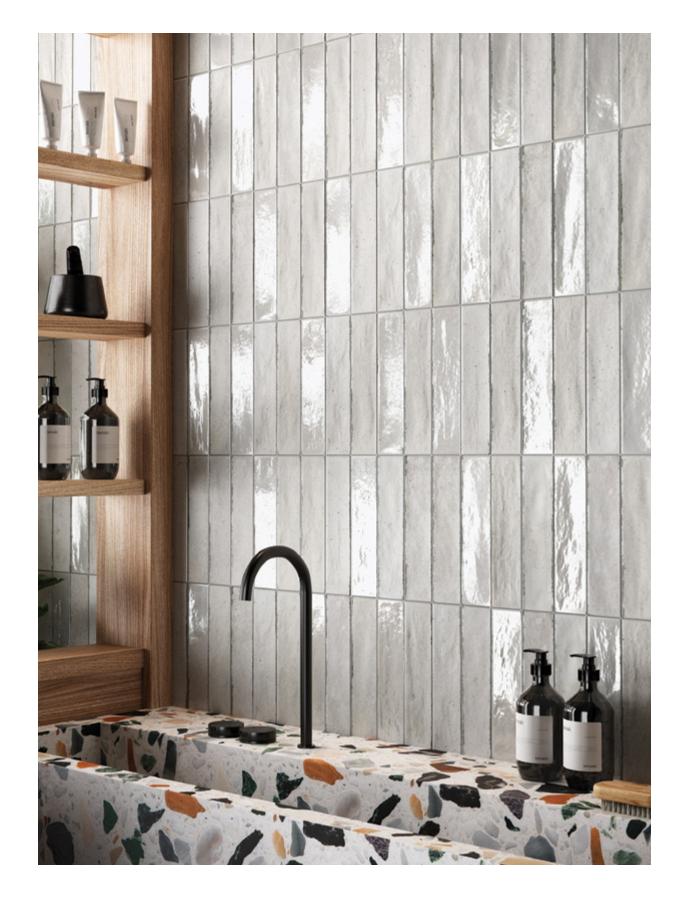

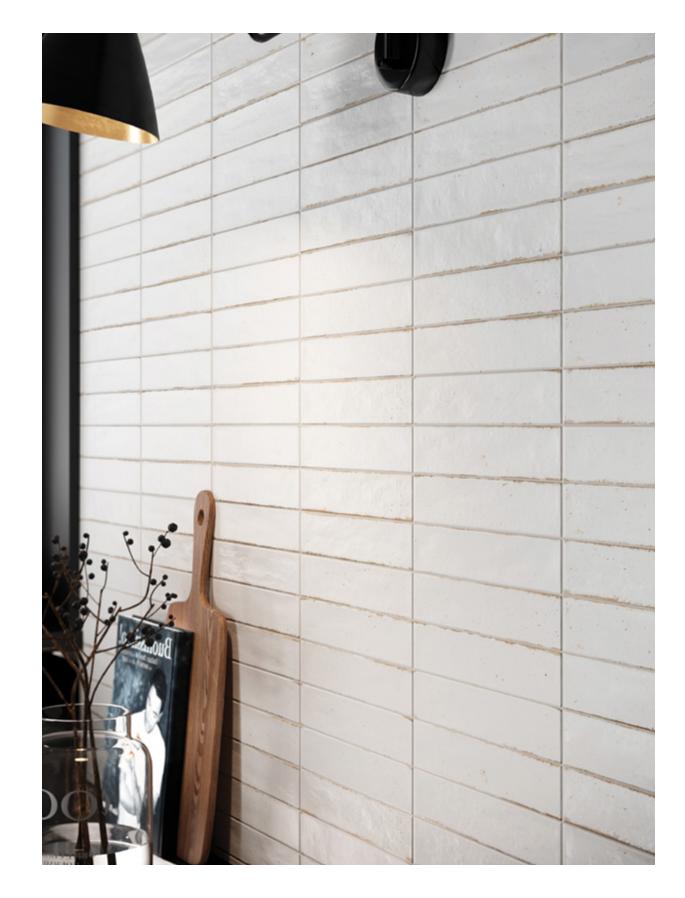


2" x 10" Floor/Wall Tile in Light Grey

AVAILABLE STOCKED ITEMS:

9.5mm Floor/Wall Tiles							
SIZE	EDGE	FINISH	COLORS				
2" x 10"	Pressed	Matte Polished	White Light Grey Blu Emerald Black				

⁻ All Sizes are Nominal

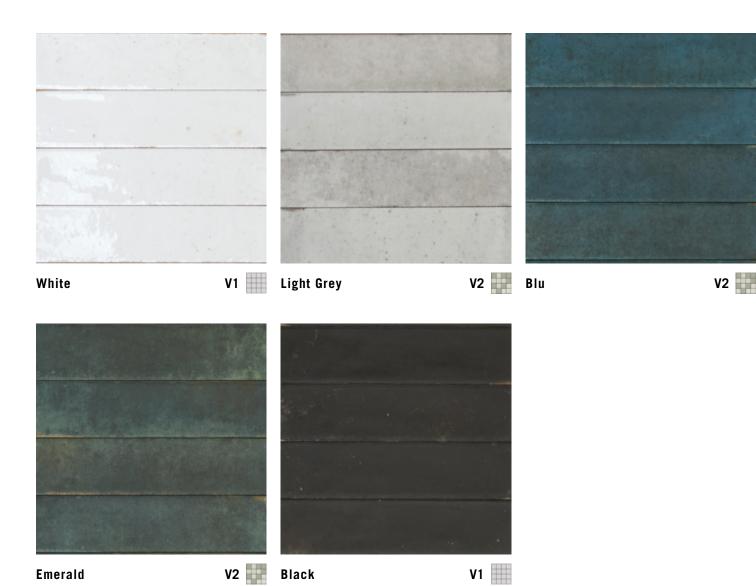

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



MIDTOWN Glazed Porcelain Tile

Features	Test Method	Value					
		N < 7cm	7cm ≤ N < 15cm N ≥ 15cm		15cm		
Length and Width	ISO 10545-2	± 0.5mm	± 0.9mm	± 0.6mm	± 2mm		
Thickness		± 0.5mm	± 0.5mm	± 0.5mm	± 0.5mm		
Straightness of Sides		N/A	± 0.75mm	± 0.5mm	± 1.5mm		
Squareness		N/A	± 0.75mm	± 0.5mm	± 2mm		
Planarity		N/A	± 0.75mm	± 0.5mm	± 2mm		
Water Absorption	ISO 10545-3	< 0.2%					
Bending Strength	ISO 10545-4	> 40 N/mm²					
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm³					
Frost Resistance	ISO 10545-12	Resistant					
Resistance to Low/High Concentrations of		Low: LA					
Alkalis and Acids	ISO 10545-13	High: HA					
Resistance to Household Chemical Products and Swimming Pool Additives		А					
Stain Resistance	ISO 10545-14	Class 5					
Hardness in Mohs Degrees	UNI EN 101	5					
Slip Resistance	ANSI A326.3	DCOF Matte: 0.43 Pass					
Stil resistance		DCOF Polished: ≤ 0.42 Does Not Pass					
Recycled Content	-	52%					
This product will contribute to USGBC registered LEED projects.							

This product will contribute to USGBC registered LEED projects.

It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

Low Emissions Material • Zero VOC

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tilesin order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glazed Porcelain Tile
- Matte | Polished Finish
- 9.5mm Thickness
- Pressed Edge
- PEI Rating = 5 (White | Light Grey), 3 (Blu | Emerald | Black)
- V1 Uniform Appearance | V2 Slight Shading Variation
- Frost Resistance = Yes





Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.