

Testo 300 Combustion Analyzer FAQ

Questions and answers
on the new testo 300 Combustion Analyzers



Which Bluetooth printer is compatible with the testo 300?

Only the 0554 0621 BT printer is compatible.

What do the LEDs in the condensation trap tell you?

	Description	Status
LEDs (green & red) off		Device is switched off
LED green - fast flashing	0.05 sec on, 0.05 sec off	Device is booting up
LED green - slow flashing	0.5 sec on, 0.5 sec off	Measuring box is trying to connect with the smart device
LED green - on full time		System is ready to operate
LED red - on full time	Testo 300 is "off" but connected to a charger	Battery is charged (100%)
LED red - fast flashing	(0.05 sec on, 1 sec off) Device is switched on	General error condition
LED red - slow flashing	(2 sec on, 2 sec off) testo 300 is "off" but connected to a charger	Battery is charging
LED - Green & Red - fast flashing alternating		Firmware-Update-Mode active. Firmware has been updated
Buzzer signal (for example a defective sensor)	If there is a fatal error while booting the device, a quick buzzer will sound 3 times	Buzzer will sound 3 times. There is a fatal error while booting

I have problems integrating my email account into the testo 300.

The following failure sources can cause a problem:

- Your work email address can be blocked by an internal firewall from your company due to safety reasons. Please use your private email address.
- Your company Wi-Fi can block the integration by an internal firewall due to safety reasons, please use another Wi-Fi connection or an open internet access via hotspot.
- Please find further information in the testo 300 instruction manual on page 37.

Can I set the CO₂ max value?

No, this is done automatically in the testo 300 in accordance to the latest ASHRAE regulations.

Can I charge my testo 300 with a powerbank?

Yes.

I'd like to replace the sensors in the testo 300, which screw driver is the correct one to remove from the housing?

Torx TX10 screw driver.

How can I register my testo 300?

- Register your testo 300 on the instrument: Menu > Help > Please register your testo 300
- Register your testo 300 on our [homepage](#).

Which testo 300 kit are available?


testo 300 Smoke Edition Kit

Order no.	testo 300 Smoke Edition Kit 0564 3002 82
Instrument, including power supply	O ₂ , CO, 4,000 ppm
Probe, including 10 spare filters	Compact flue gas probe (12 in., Ø 0.25 in.)
Printer, including spare paper	<input type="checkbox"/>
testo EasyHeat software (free download - www.testo.com)	<input checked="" type="checkbox"/>
Instrument bag	<input checked="" type="checkbox"/>
Warranty	2 years



testo 300 Smoke Edition Printer Kit

Order no.	testo 300 Smoke Edition Kit with Printer 0564 3002 83
Instrument, including power supply	O ₂ , CO, 4,000 ppm
Probe, including 10 spare filters	Compact flue gas probe (12 in., Ø 0.25 in.)
Printer, including spare paper	<input checked="" type="checkbox"/>
testo EasyHeat software (free download - www.testo.com)	<input checked="" type="checkbox"/>
Instrument bag	<input checked="" type="checkbox"/>
Warranty	2 years

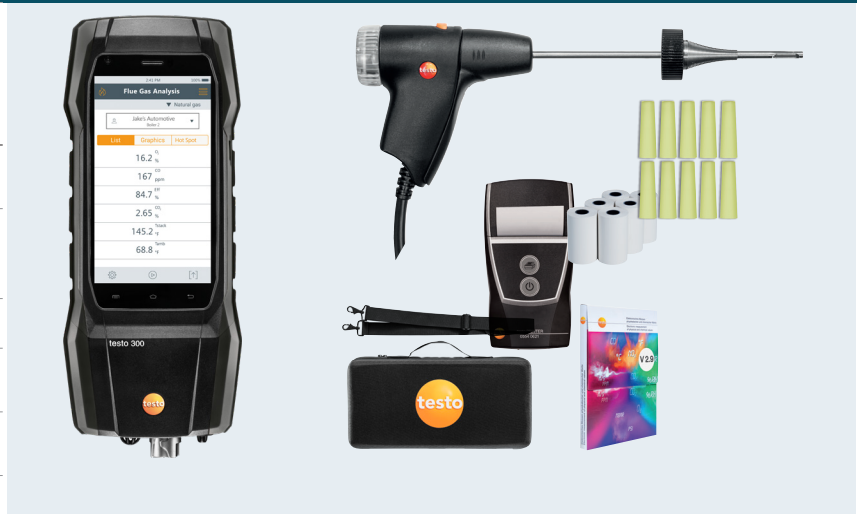

testo 300 Pro Kits

	testo 300 Pro Commercial Kit 0564 3004 92	testo 300 Pro Commercial Kit with Printer 0564 3004 93	testo 300 Pro Commercial / Industrial Kit w/ CO (up to 30,000 ppm), NO, and Printer 0564 3004 96
Order no.			
Instrument incl. power supply	O ₂ , CO, 4,000 ppm, NO sensor - can be retrofitted	O ₂ , CO, 4,000 ppm, NO sensor - can be retrofitted	O ₂ , CO, 30,000 ppm, NO sensor
Probe incl 10 spare filters	Modular flue gas probe (12 in., Ø 0.25 in)	Modular flue gas probe (12 in., Ø 0.25 in)	Modular flue gas probe (12 in., Ø 0.25 in)
Printer incl spare paper	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
testo EasyHeat software	<input checked="" type="checkbox"/> (free download - www.testo.com)	<input checked="" type="checkbox"/> (free download - www.testo.com)	<input checked="" type="checkbox"/> (free download - www.testo.com)
Instrument case	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Warranty	4 years	4 years	4 years

