

# STAINLESS STEEL SPRING CHECK VALVE


## BSP THREADED 8 - 100MM

### MODEL - SS2026C



#### FEATURES AND BENEFITS

- For Industrial, Chemical & General Applications
- 316 S/S Construction
- Threaded BSPT Ends
- Investment Cast Body
- Pressure Rating:1000PSI WOG
- Working Temperature: -20°C~200°C
- Testing to API598

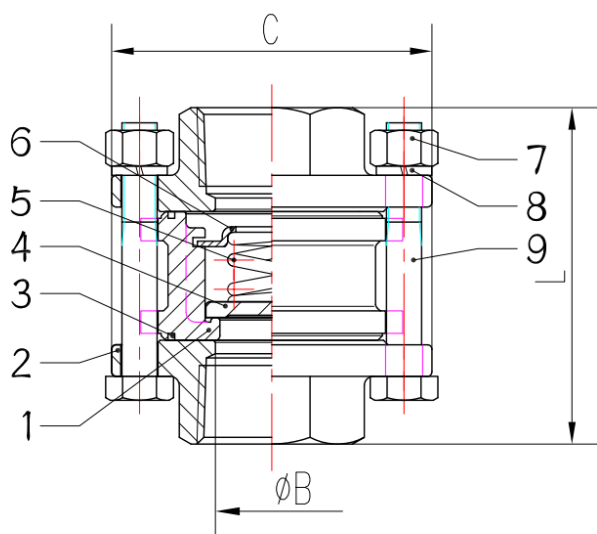

NO.	PART NAME	MATERIAL
1	Body	CF8M
2	Cap	CF8M
3	Seal	PTFE
4	Disc	SS316
5	Spring	SS316
6	Stopper	SS304
7	Nut	SS304
8	Washer	SS304
9	Bolt	SS304

DIMENSIONS				
DN	B	C	L	Kg
8				
10				
15 (½")	15	54	56	0.298
20 (¾")	20	62	65	0.430
25 (1")	25	71	74	0.610
32 (1¼")	32	88	83	0.994
40 (1½")	40	95	92	1.312
50 (2")	50	117	110	2.132
65 (2½")	65	147	125.50	3.942
80 (3")	76	167	141	5.706
100 (4")	94	224	164	9.986

#### APPLICATIONS

Challenger Valves and Actuators are the **"Right Choice for Valves and Actuation"** when quality matters.

Servicing industries such as :

Water & Waste Water, Mining, Desalination, Pumping, Industrial Processing, Irrigation, Materials Handling and Chemical Services.