


HD SUPER CLASS



For tough jobs in non-stop use.

Where vast amounts of dirt accumulate every day, reliable Kärcher super class models provide indispensable services. Ideal for use in the construction, agricultural and forestry sectors as well as industrial and municipal facilities.

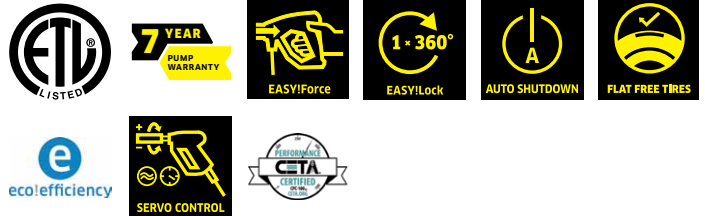

Features

- Robust, three-piston axial pumps features detergent-resistant brass cylinder head and stainless valves; pumps is protected by pressure switch and over flow valve
- Low-speed, 4-pole, air-cooled motor runs quieter and cooler than conventional motors thus prolonging its service life
- EASY!Force gun with cruise control like technology – uses its own recoil force to hold the trigger down – so, no more sore hands after hours of use

TECHNICAL DATA

Model	Part No.	GPM	PSI	Drive	HP	Electrical	Amps	Pump	Ship Weight (lbs)	Ship Dimensions (L x W x H) Inches
HD 3.5/30-4S Ea	1.286-908.0	1.8-3.5	435-3000	Direct	9	220/240V / 1ph	28	Kärcher Axial	178	47 x 21 x 23
HD 4.5/32-4S Eb	1.286-909.0	2.2-4.5	435-3200	Direct	10	230V / 3ph	25	Kärcher Axial	178	47 x 21 x 23
HD 4.5/32-4S Ec	1.286-910.0	2.2-4.5	435-3200	Direct	10	440V / 3ph	14	Kärcher Axial	160	47 x 21 x 23

ACCESSORIES

Order No.	Description
■ 4.118-005.0	EASY!Force trigger gun
■ 4.112-000.0	41" spray lance
■ 6.110-030.0	50' EASY!Lock hose with ANTI!Twist connection
■ 2.113-022.0	Power nozzle, 045 (for machine 1.286-908.0)
■ 2.113-025.0	Power nozzle, 055 (for machine 1.286-909.0)
□ 4.118-008.0	Servo control
□ 2.112-000.0	Inno Foam kit
□ 2.112-015.0	Gutter cleaning lance
□ 4.112-035.0	Flexible spray lance
□ 6.110-049.0	Pipe cleaning hose 65', 1740 psi
□ 6.110-050.0	Pipe cleaning hose 98', 1740 psi
□ 6.110-008.0	Pipe cleaning hose 65', 3625 psi
□ 2.111-023.0	FR TR 50 ME hard surface cleaner
□ 2.111-012.0	FRV TR 30 ME
□ 2.111-011.0	Surface cleaner FR 30
□ 2.111-010.0	FRV TR 30 hard surface cleaner
□ 4.115-000.0	Wet blasting attachment
□ 2.113-020.0	25° power nozzle for applying cleaning agent
□ 4.114-019.0	Dirtblaster Nozzle 035
□ 4.637-033.0	Detergent injector for high pressure
□ 4.111-037.0	Coupling

■ Included □ Optional ■ Compatible with EASY!Lock