# Viking Electra Tank Bag Installation:

x 4



Parts:		
i	Mounting Bracket/Hook	x 1
ii	6mm x 20mm Bolts	x2
iii	Mounting Straps	x 2

#### Note:

- i. When performing Step 2 and Step 3, Do not disconnect the male/female connectors
- ii. The tank bag is pad lockable
- iii. When using rain cover make sure the cover is entirely tucked under the tank bag

#### Instructions:


Rain Cover

# Step 1

Remove tank trim.

#### Step 2


Move the harness connector away from the carrier caddy to gain access to the bolts. See Fig 1.

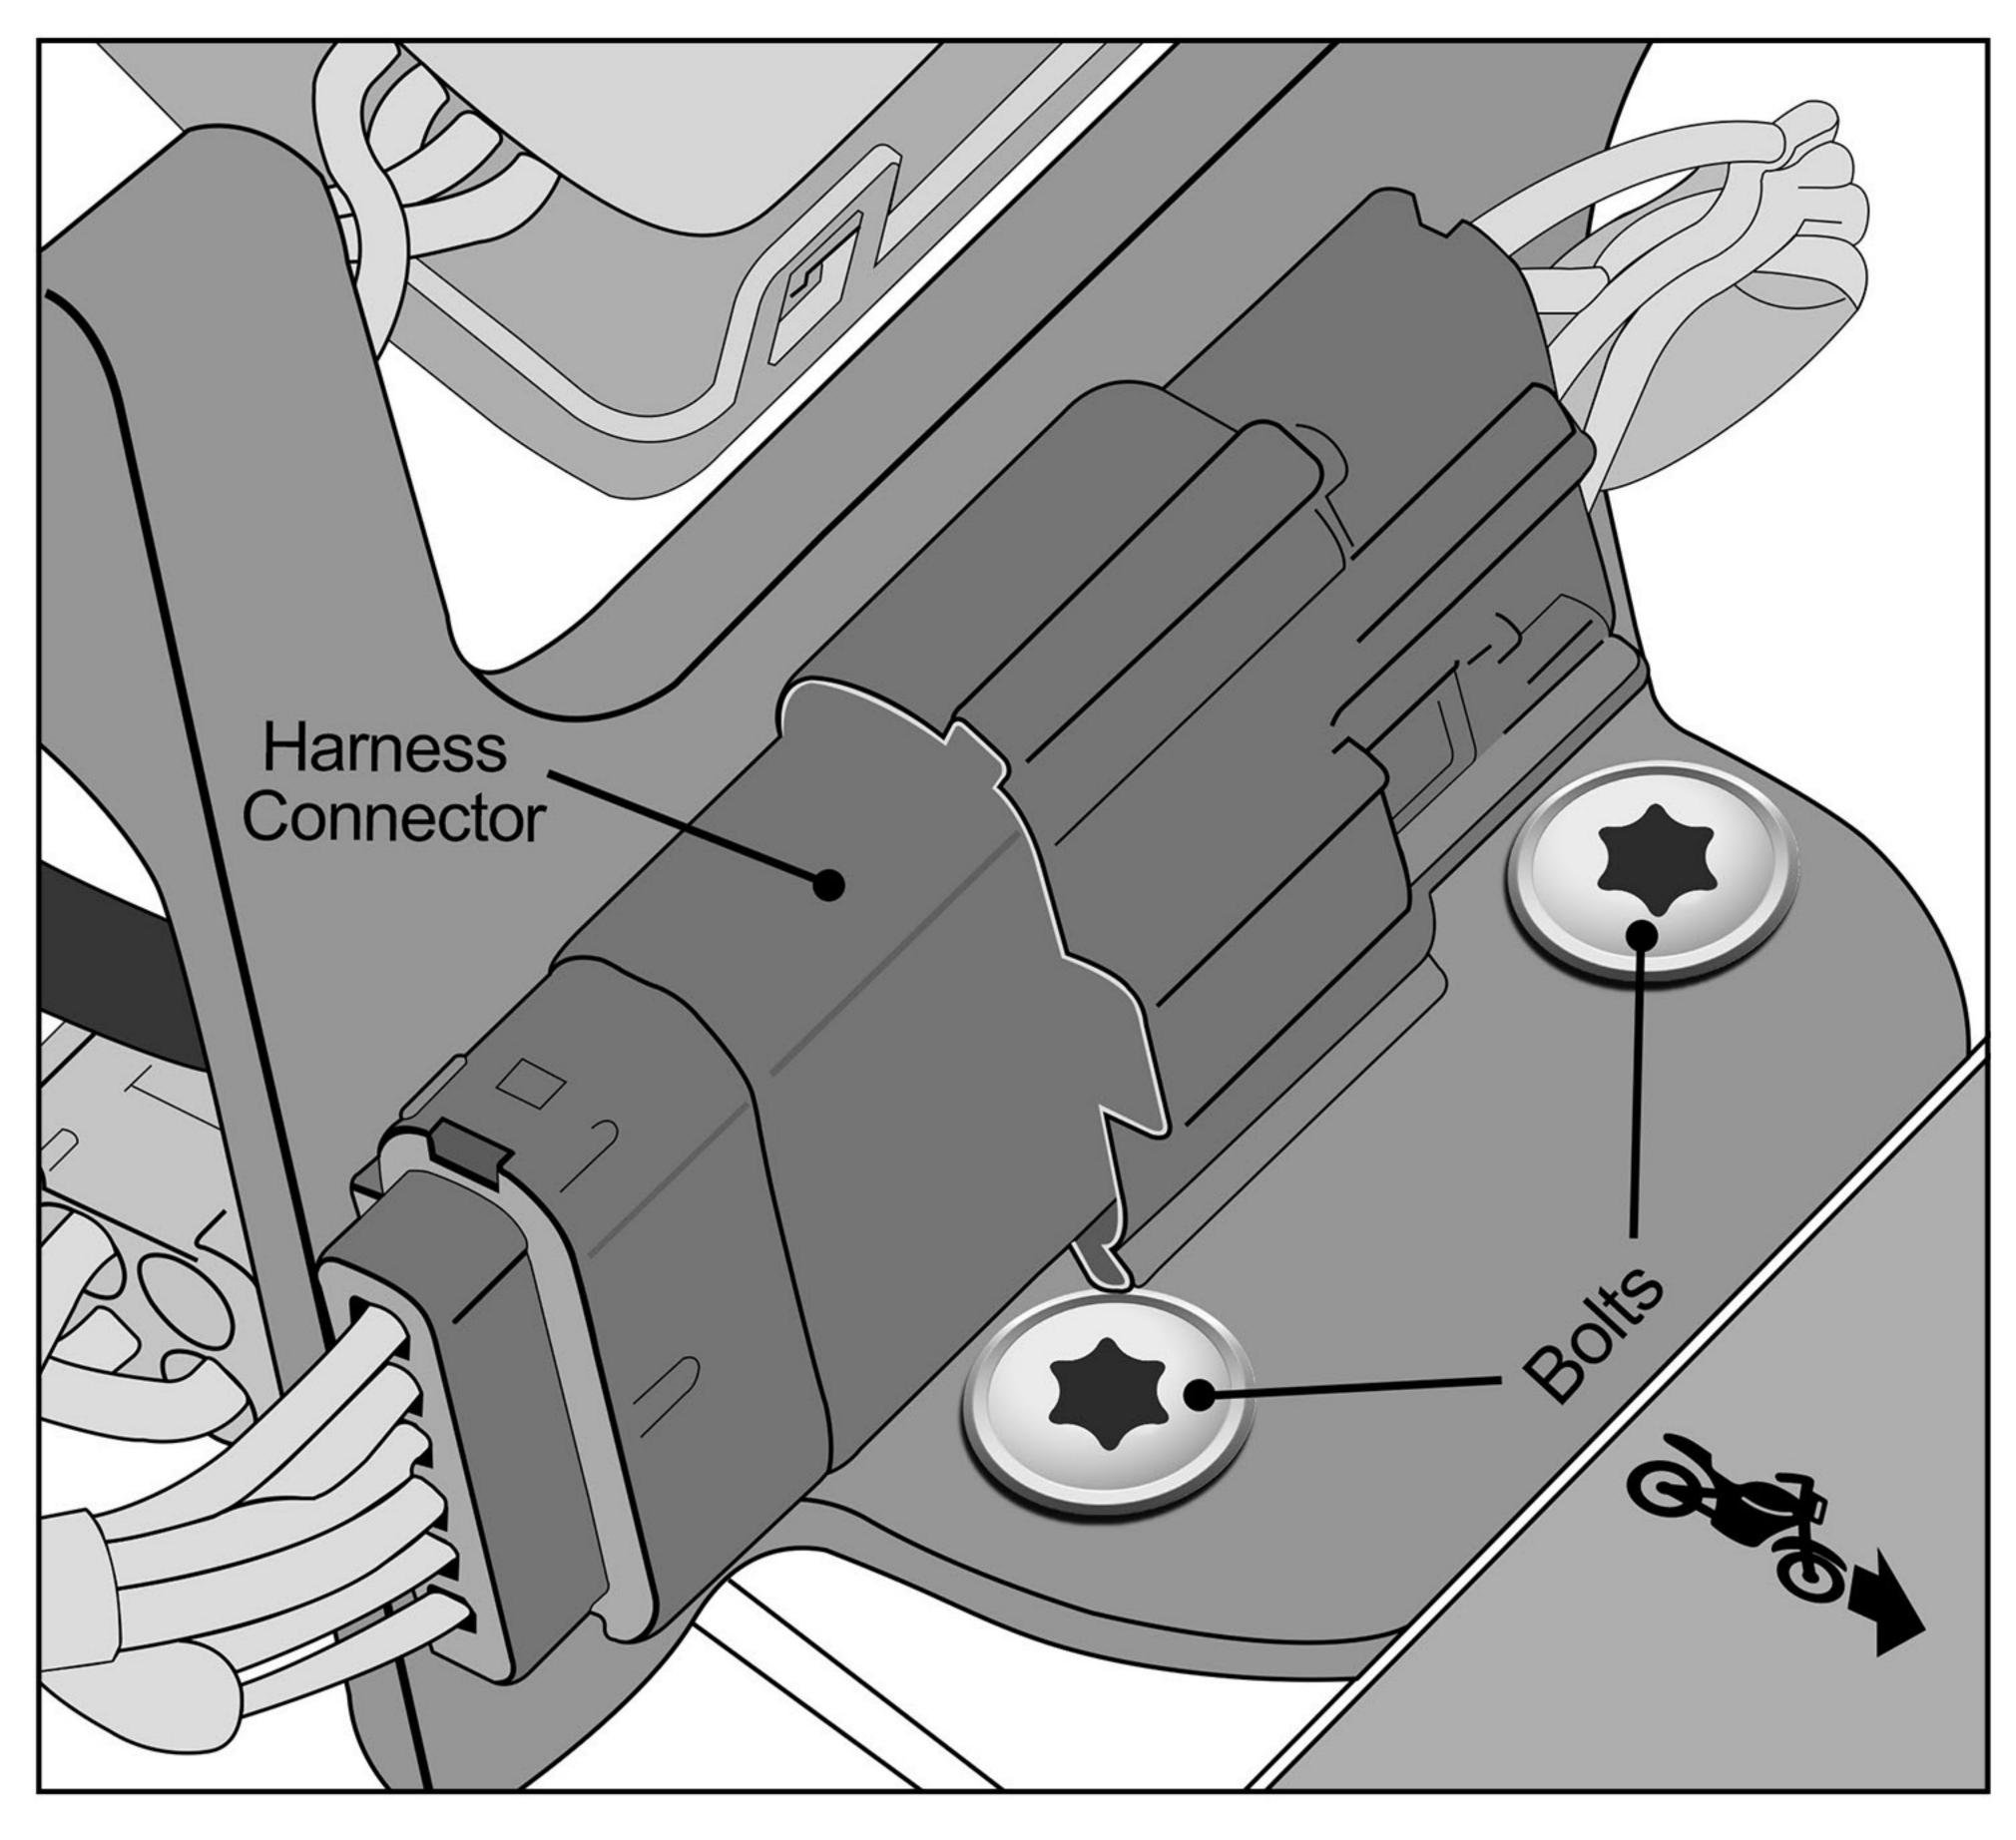

(Fig 1) Gain access to the screws by moving the harness connector away from the carrier caddy

# Step 3

Remove OEM Bolts from the carrier caddy. See Figure 2.

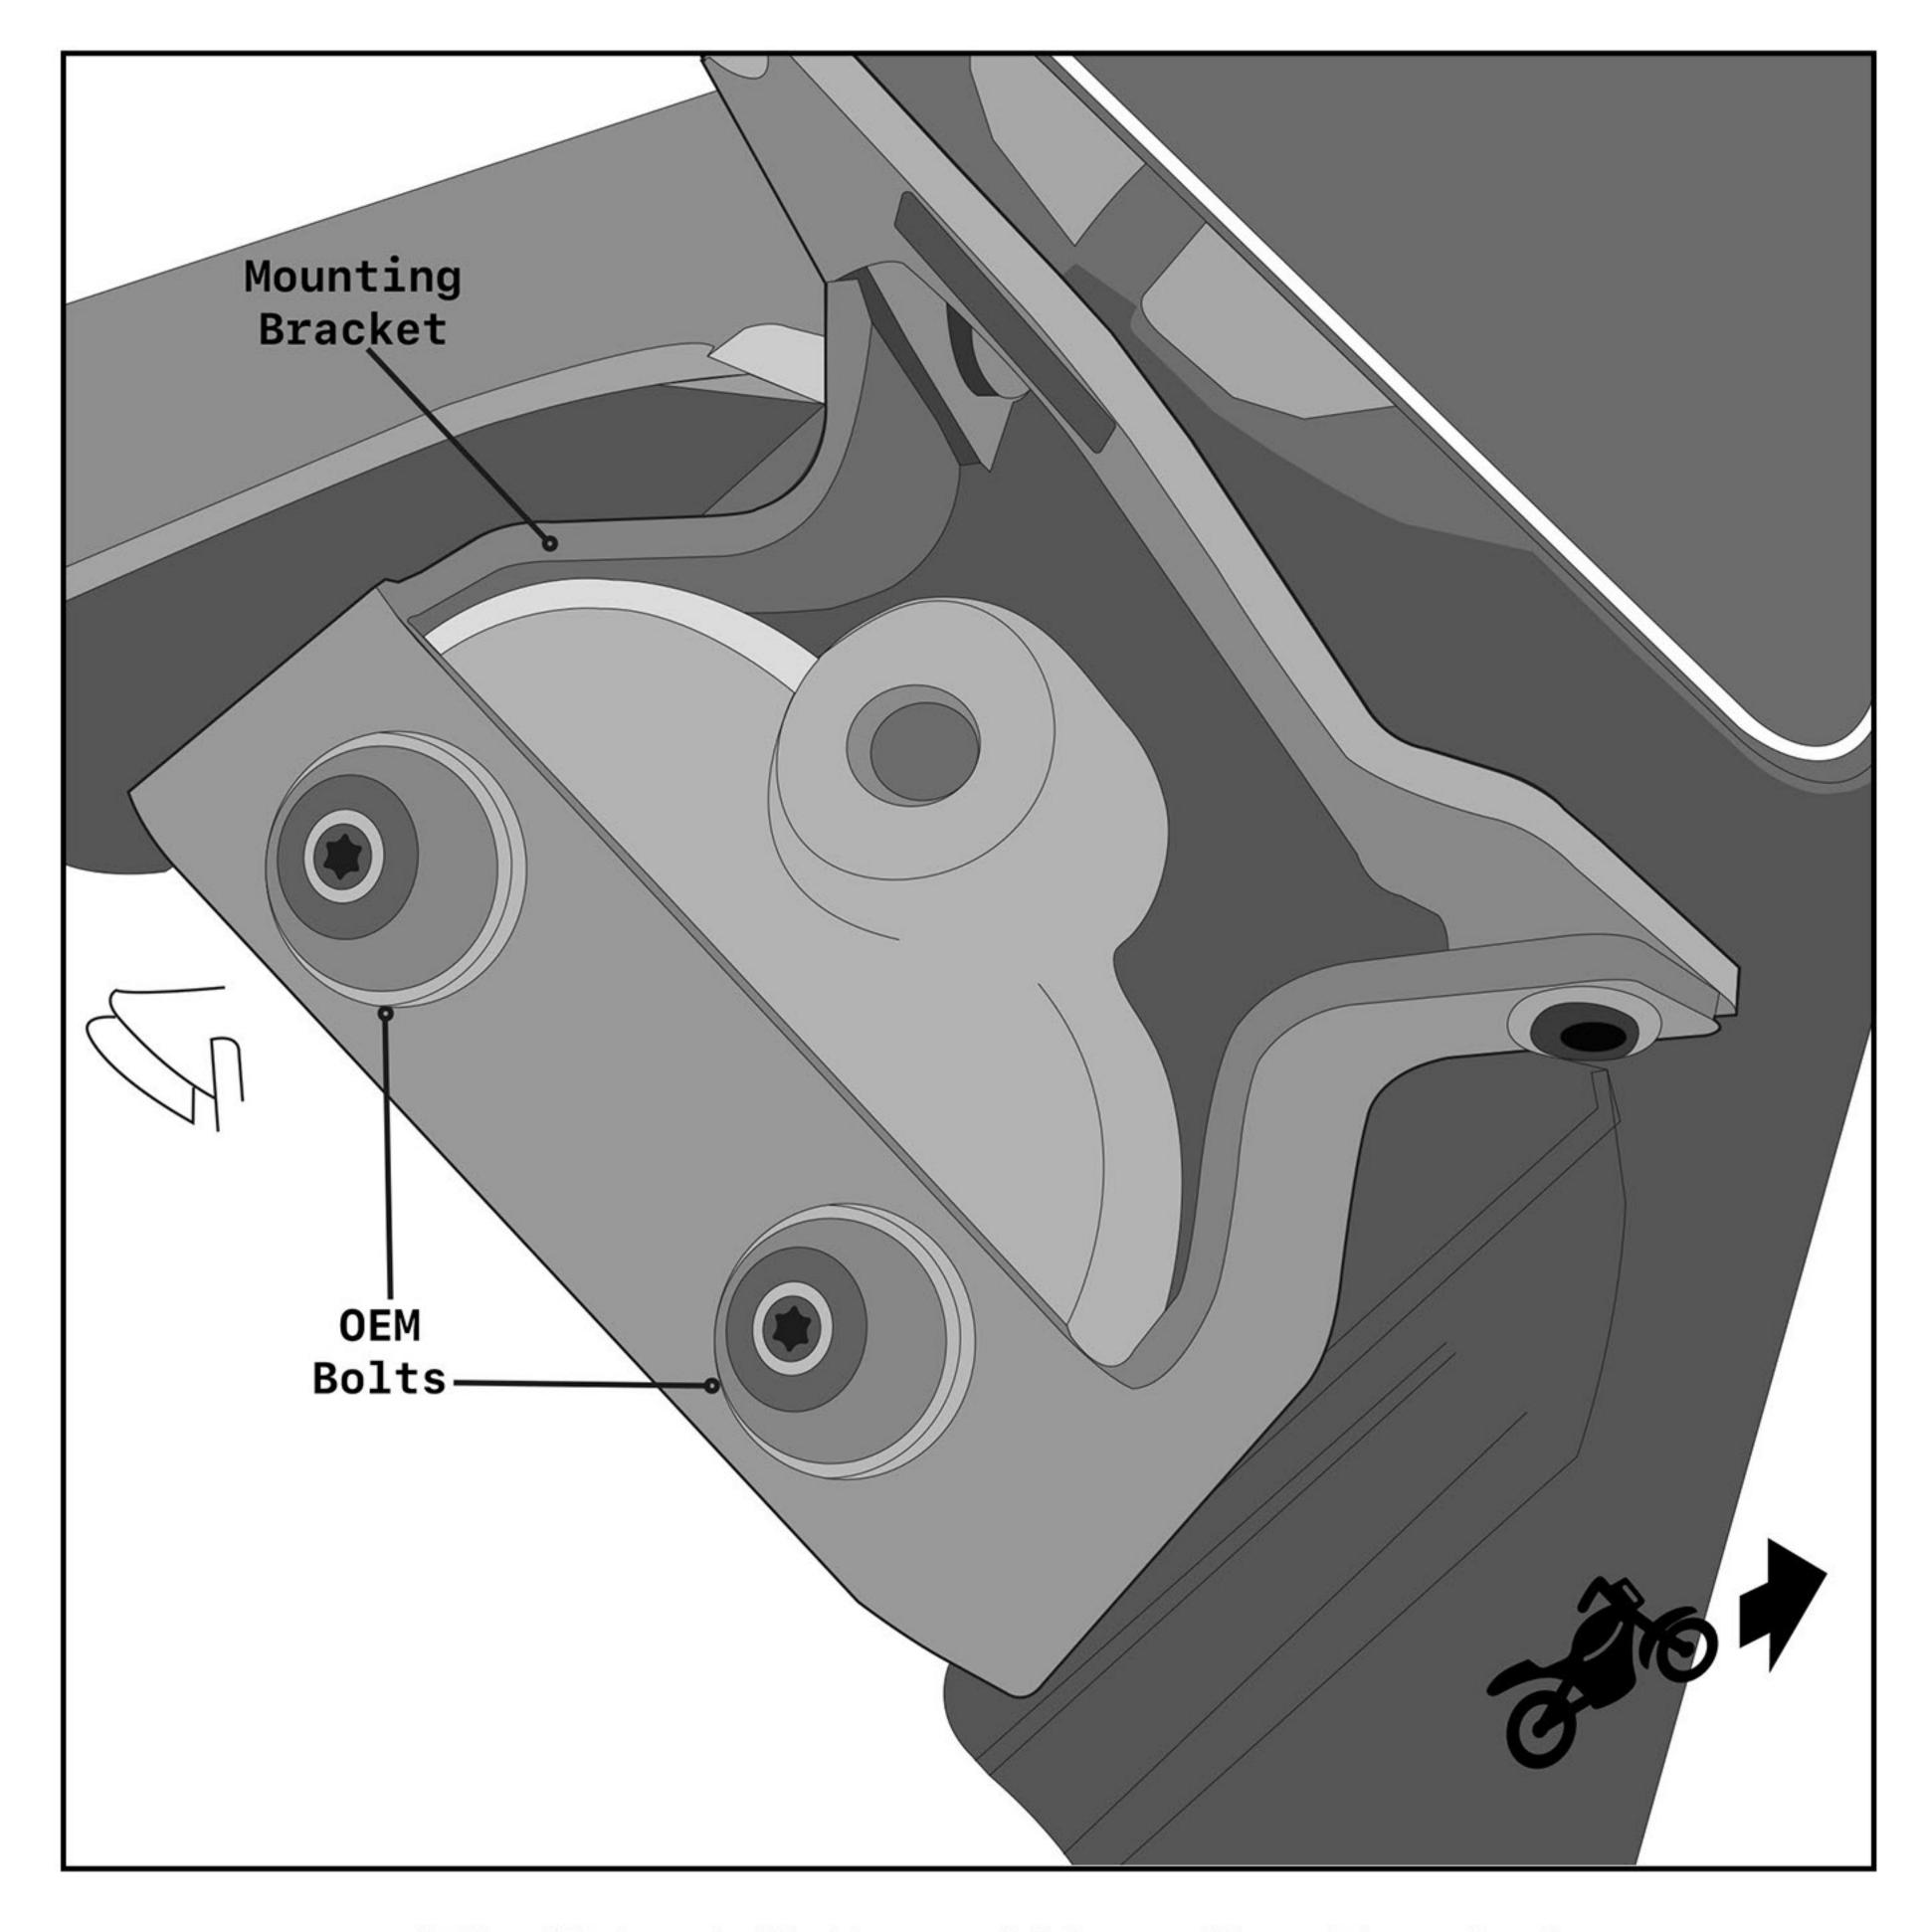

(Fig 2) Installation of Mounting Bracket

# Step 4

Install the mounting bracket. Make sure to use the 6mm x 20mm bolts provided in the kit and discard the OEM bolts. Recommended Torque to tighten (8 - 10 N.m). See Fig 2.

#### Step 5

Install back the harness connector on the carrier caddy.

#### Step 6


Install back tank trim.

# Step 7

Install the mounting straps between the motorcycle frame and the wrapped cover. Then insert the end of the strap with the quick-release buckle into the loop at the opposite end of the strap. Repeat the step for the other side.

## Step 8

Finally, mount and install the tank bag by securing it to the bracket to the front and attaching the quick-release buckles at the bottom. See Fig 3.

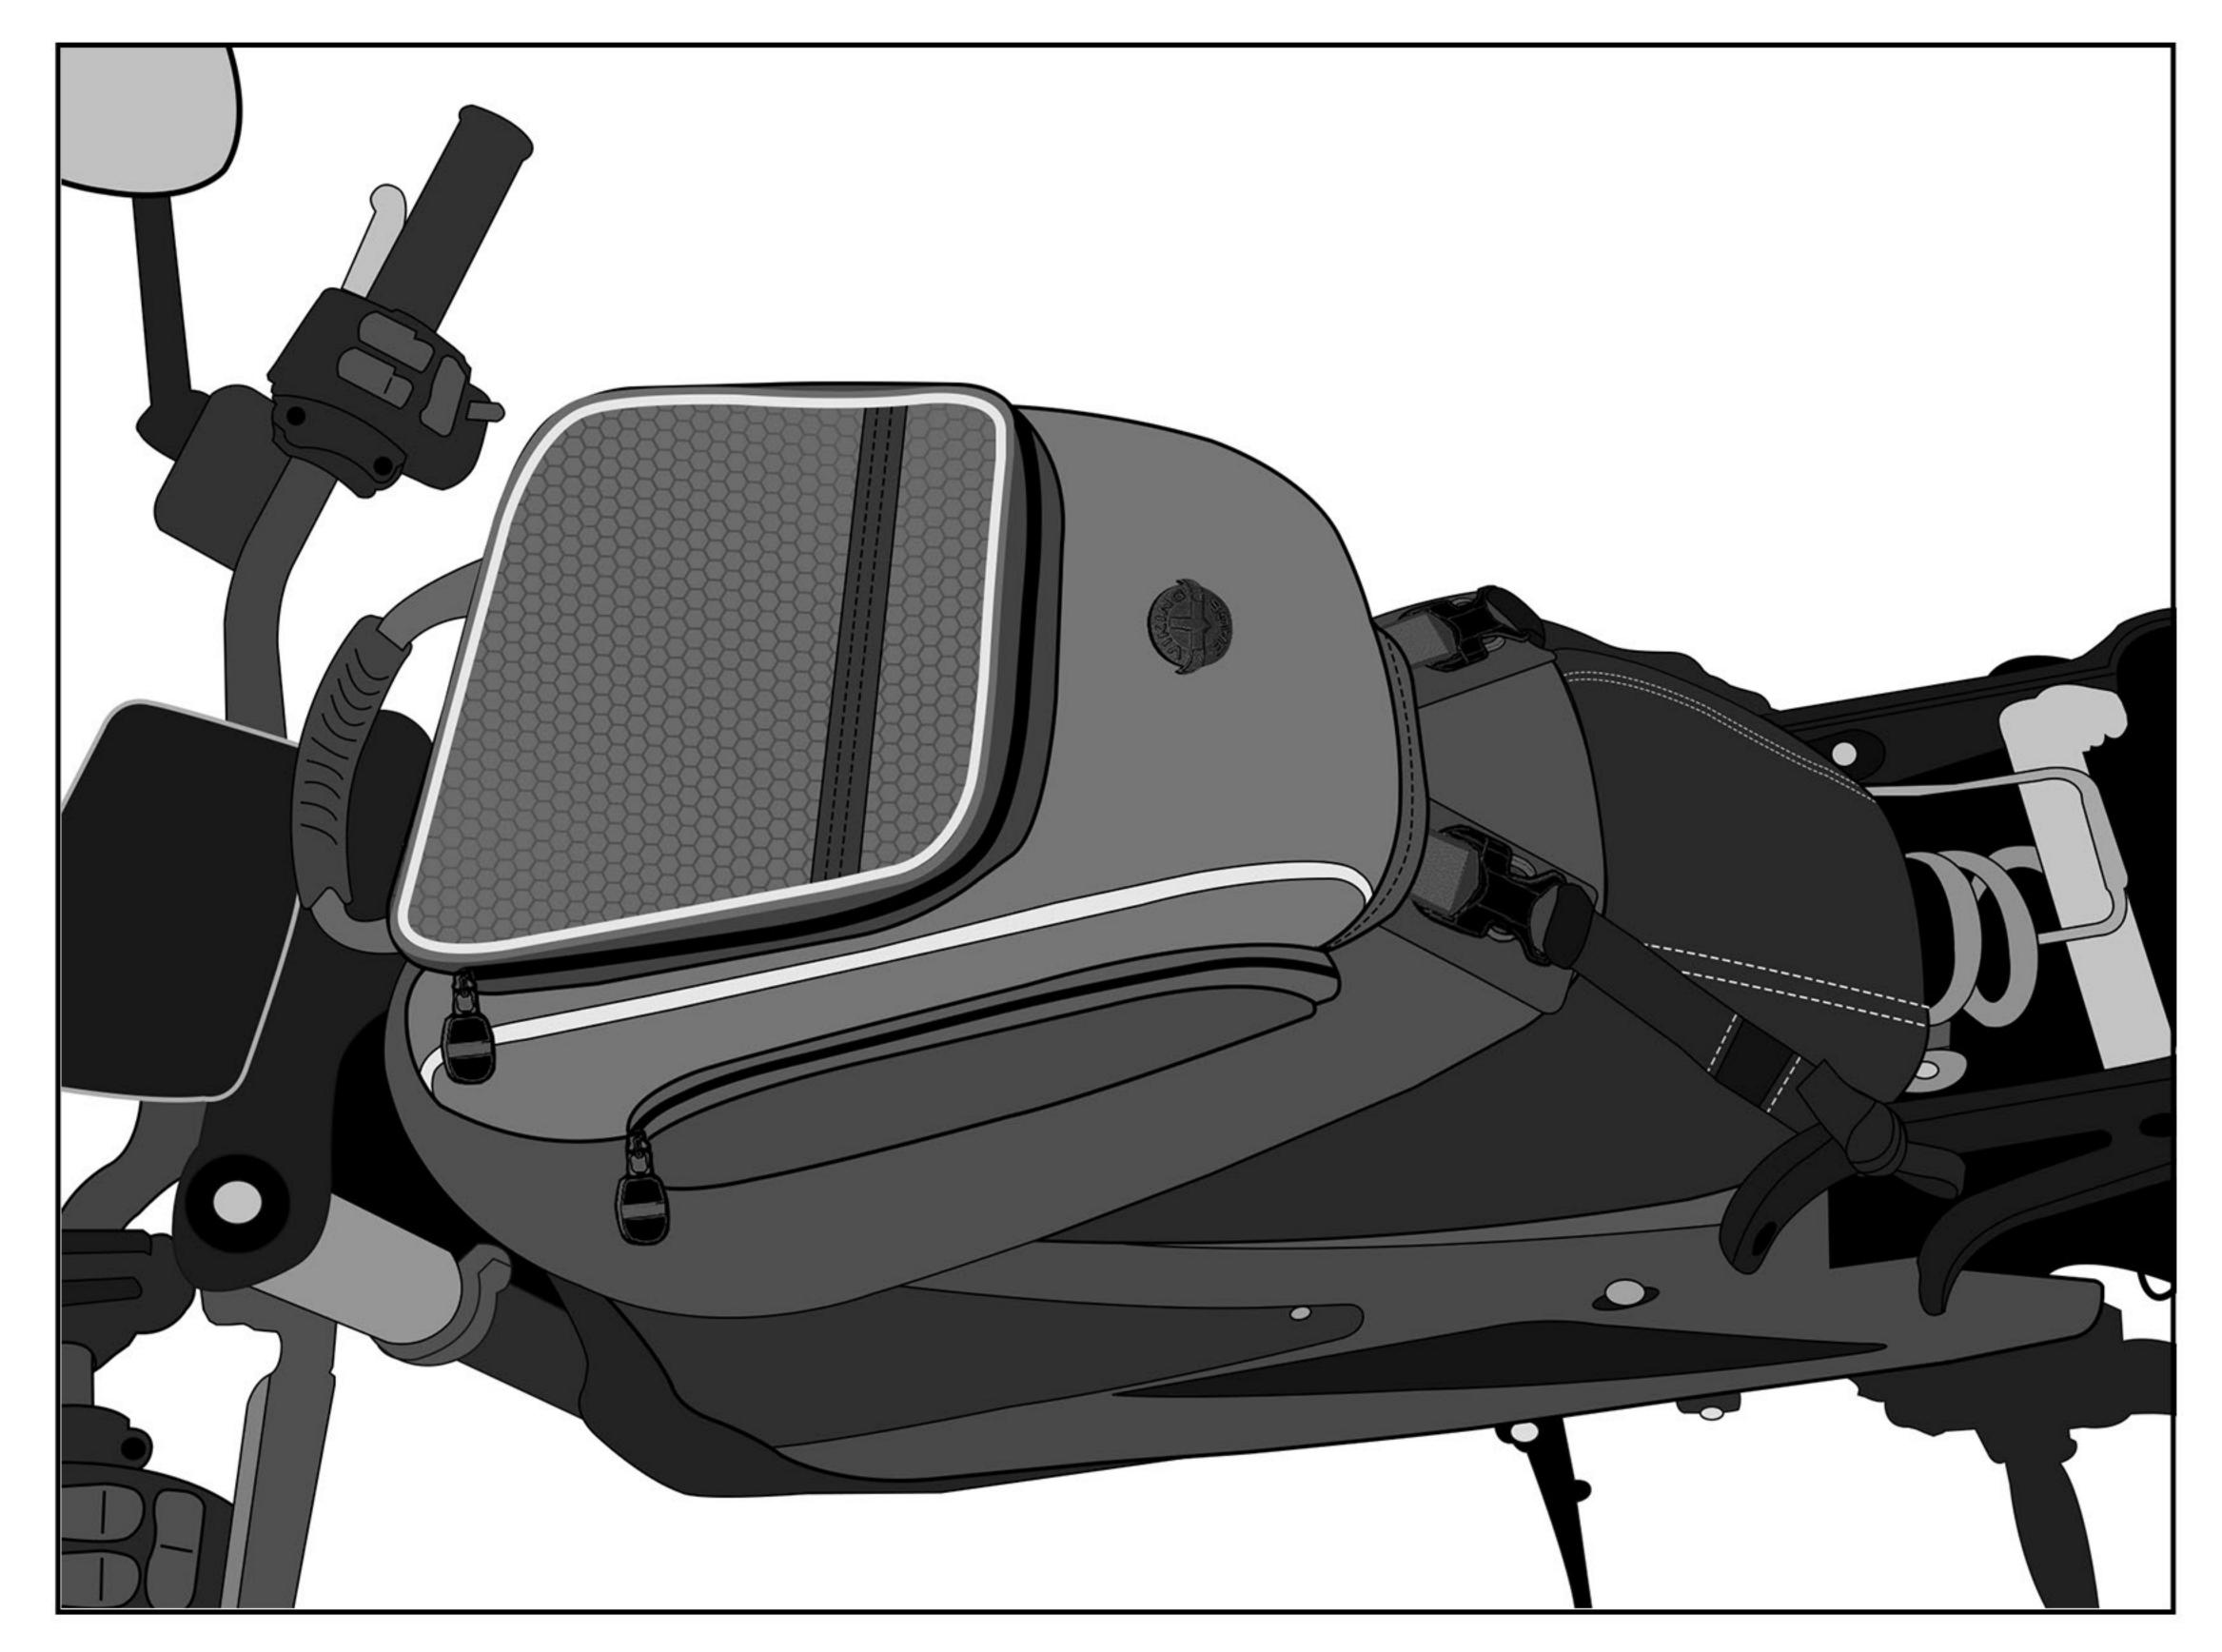

(Fig 3) Tank Bag Installed

# Step 9

Pull the mounting straps to tighten and check to see if the tank bag is securely fastened.

# Congratulations! Your Viking Electra Tank Bag is installed and now you are ready to ride.

### Warnings!

- In case you are unsure about your ability to install the tank bag securely, please seek assistance from a
  qualified mechanic.
- Maximum weight capacity: 4 lbs. Improper cargo loading can affect stability, handling, and performance, which may result in serious injury or even death.
- Viking Bags is not liable for any damage or malfunctions caused to your bike during installation.
- It is important to note that if you do not mount the tank bag properly, damage may be caused to the motorcycle.
- Sporadically check for shifting of the bolts and verify that no part of the mounting system is interfering with any
  part of the bike while riding.
- Avoid using any mounting part that is impaired or not working correctly.