



Hey there!

It's not rocket science, but following the instructions will make installing your seat covers a lot easier. We promise.

If you have any questions, comments, or issues, we're here to help! You can reach us at 507.246.3545 (call or text) or email [orders@tigertough.com](mailto:orders@tigertough.com).

**PART NUMBER**

**W0623009**

**PRODUCT TYPE**

**40/20/40 SET**

**PIECES**

**(1) DRIVER BACK**

**(1) DRIVER BOTTOM**

**(1) PASSENGER BACK**

**(1) PASSENGER BOTTOM**

**(2) HEADREST COVERS**

**(2) STRINGLOCKS**

**(1) CONSOLE BACK**

**(1) CONSOLE BOTTOM**

**VIDEO INSTRUCTIONS**

*case sensitive link*

**[ttcovers.com/62309video](http://ttcovers.com/62309video)**





*Basically, you break it, we buy it.  
Seriously.*

**Your new seat covers are covered by a two-year, unconditional, no B.S. warranty.**

That means that if you manage to abuse them to a point that they can't perform like they're supposed to within two years of when you bought them, we'll make it right.

Depending on what is more practical, we'll either repair or replace the damaged cover.

### **General care instructions:**

1. In most cases dirt, debris, spills and pet hair can be removed by wiping with a damp cloth.
2. Seat covers can be removed and machine washed on low temperature setting using mild detergent. Drip dry or machine tumble dry on a no heat cycle. Straps should be coiled and secured with rubber bands for machine washing and drying.
3. Soil may be removed with spray cleaner or detergent and water.
4. Oil or grease stains should first be treated with a dry cleaning solvent followed by a spray cleaner or detergent and water.
5. Do not use bleach.

### **IMPORTANT: AIRBAG COMPATABILITY**

**YOUR SEAT HAS SEAT SIDE AIRBAGS.** For maximum safety in the event of a crash, these airbags **MUST NOT** be restricted.

Your cover has been engineered with a tearaway flap (stitched with white thread) that will allow the airbag to deploy. Ensure that this flap & the orange TigerTough tag are facing the door.

TigerTough is not responsible for any issues resulting from incorrectly installed seat covers.

# 1 - Preparation



- ❑ 1.1 - Slide seat forward and raise to highest position, if possible.
- ❑ 1.2 - Lift headrest up by pressing the button on the side of the headrest and pulling up.
- ❑ 1.3 - Turn the trim pieces at the top of the seat back counter clockwise to loosen them.
- ❑ 1.4 - Use a small flat screwdriver to release the headrest retainer at the base of each headrest post by prying it up and forward at the same time. Instructions here: [ttcovers.com/chevyheadrest](http://ttcovers.com/chevyheadrest)
- ❑ 1.5 - Once both retainers are released, pull the headrest out of the seat back.

## 2 - Install Seat Back Cover



- 2.1 - Unhook both elastic straps from under the seat bottom to release the seat back flap.
- 2.2 - Lean seat back forward.
- 2.3 - Turn seat back cover 3/4 of the way inside out and pull over seat back.
- 2.4 - Line holes in cover up with headrest holes.
- 2.5 - Continue pulling the cover down over the seat, unrolling it as you go.
- 2.6 - Push factory seat back flap into space between seat back and seat bottom.
- 2.7 - Push front flap between seat back and seat bottom.
- 2.8 - Pull front flap as tight as possible and fasten to Velcro on seat back.

### 3 - Install Seat Bottom Cover





Seat cover string between seat bottom and plastic trim, where back and bottom meet.



- 3.1 - Put cover over seat bottom.
- 3.2 - Tuck cover behind plastic trim around seat. The seams in the cover will line up with seat seams.
- 3.3 - Tuck outside string between seat bottom and trim, where the back and bottom meet. Inside string goes under seat bottom, in front of rear seat mount.
- 3.4 - Push top flap between seat back and seat bottom. Pull tight to line cover up with seat bottom.
- 3.5 - Pull strings tight.
- 3.6 - Secure with StringLock (see next page).
- 3.7 - Run front flaps over all seat adjustment levers, wires, and brackets.
- 3.8 - Pull front flaps as tight as possible and fasten to Velcro on top flap.
- 3.9 - Fasten long flap from seat back under seat bottom.

# THE STRINGLOCK

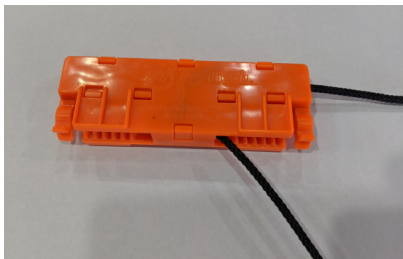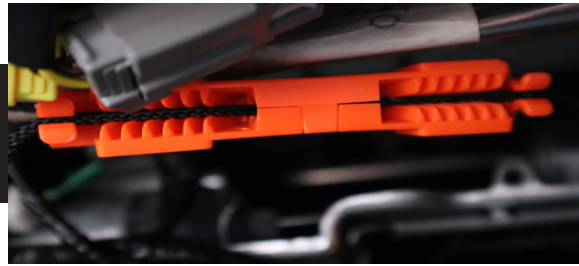


①

Run one string through the channel on the end of the StringLock.




②

Pull the string tight, pulling the StringLock towards one edge of the seat. Press the string into the clamp, locking it in place.

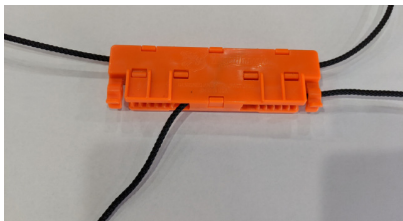

③

Run the second string through the StringLock just like the other one.

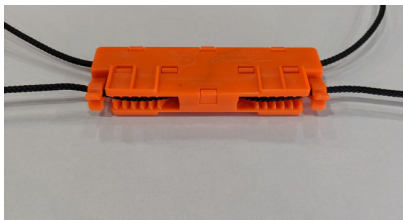

④

Pull the loose end of the second string until everything is tight and lock it into place as well.

## 4 - Install Headrest Cover



- 4.1 - Put headrest back in seat by pressing it back into place.
- 4.2 - Pull cover over head rest with “loop” Velcro in front and “hook” Velcro in rear.
- 4.3 - Fasten Velcro tabs together under headrest.
- 4.4 - Tuck cover behind plastic trim around button.

## 5 - Install Console Back Cover



- 5.1 - Feed cover between console back and bottom.
- 5.2 - Tip lid up.
- 5.3 - Pull cover over lid, lining latch handle up with hole in cover.
- 5.4 - Close lid and tip console up.
- 5.5 - Pull cover up and over seat back.
- 5.6 - Fasten cover around the seat belt.
- 5.7 - Pull rear side straps tight and fasten to rear of console.
- 5.8 - Fasten small black straps inside console, behind the latch.



## 5 - Install Console Bottom Cover



- 6.1 - Pull cover over seat bottom.
- 6.2 - Pull cover tight and fasten Velcro around bottom of cover to factory upholstery.
- 6.3 - Push top flap between seat back and seat bottom.