


GOODDAY[®] L-BAR

ALERTNESS-ENHANCING LINEAR LUMINAIRE
(FLYING LEADS)

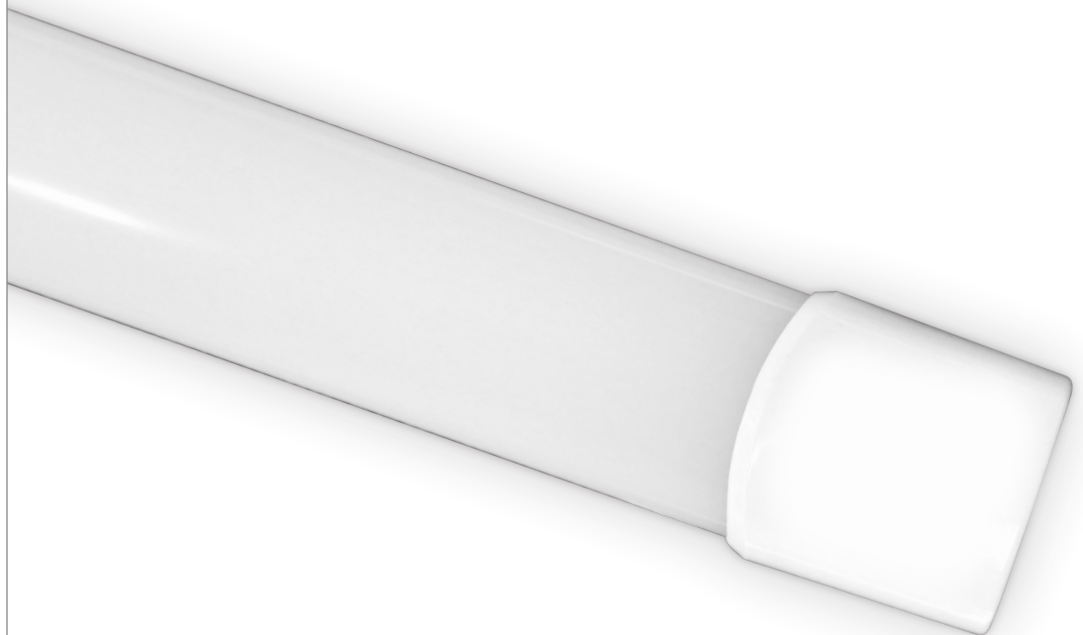

FEATURES

- Extremely lightweight, low-profile and versatile
- Promotes alertness and enhances mood and performance
- Provides specialized light to enhance energy throughout the day
- Improves focus and boosts energy and performance
- Provides comfortable, white light with high color rendering
- Sleek design; light and durable construction
- Easy Installation: Ease of use with 2-prong plug and optional plug-in switch, comes with surface mounting hardware
- Can help alleviate symptoms of Seasonal Affective Disorder and regulate the sleep-wake cycle.

SPECIFICATIONS

	2 FOOT GOODDAY L-BAR	4 FOOT GOODDAY L-BAR
Correlated Color Temperature (CCT)	5000K	5000K
Lumen Output	1350 lm	3500 lm
Beam Angle	100°	100°
Color Rendering Index	≥90	≥90
Power Consumption	15W	30W
Power Factor	≥0.9	≥0.9
Melanopic/Photopic Ratio (M/P)	0.93 +/- 0.02	0.93 +/- 0.02
Dimmable	No	No
Input Voltage (V)	100-277 V	100-277 V
Product Dimensions (LxWxH in/mm)	24.0 x 1.9 x 1.1 in / 610 x 47 x 28 mm	47.8 x 1.9 x 1.1 in / 1215 x 47 x 28 mm
Weight (lbs/g)	0.93 lbs / 422 g	1.18 lbs / 535 g
Housing	Polycarbonate	Polycarbonate
Power Connections	2-prong plug (US) with cable, length 59 in / 1.5 m	2-prong plug (US) with cable, length 59 in / 1.5 m
Lumen Maintenance (L ₇₀)	50,000 hrs	50,000 hrs
Mounting	Surface mount via included hardware	Surface mount via included hardware
Certifications	FCC, ETL, RoHS, DLC	FCC, ETL, RoHS, DLC
Environment	Wet Location, IP65	Wet Location, IP65
Warranty	3 Year Limited	3 Year Limited



ORDERING

EXAMPLE: VGRO GDYBAR 48 GDAYK 90 30 FR MVOLT ST SC

Family VGRO	Product GDYBAR	LENGTH¹ 48 4 feet	Color Temperature GDAYK	CRI 90
Wattage Equivalent 30 30 W	Lens FR Frosted	Voltage MVOLT	Power Cord Egress ST Straight	Packaging SC

1 Length 24 pairs with 15W only, and length 48 pairs with 30W only in the ordering nomenclature