

VpCI®-819

DESCRIPTION

VpCI®-819 Wax/Rinse shines, seals, and protects metal surfaces using vapor corrosion inhibitors. VpCI®-819 is formulated for application in high or low pressure sealer arches in automatic car washes and is safe for all paint finishes. VpCI®-819 penetrates into finishes, sealing paint and metal surfaces from the damaging effects of corrosion.


VpCl®-819 provides a lasting shield of protection against sun bleaching, oxidation, and corrosive aging of vehicle finishes. VpCl®-819 also provides corrosion protection for car wash equipment, extending the life of the equipment; up to 30%.

PACKAGING & STORAGE

VpCI-819 is available in 5 gallon (19 liter) pails, 55 gallon (208 liter) drums, liquid totes, and bulk.

To ensure best product performance, store in original packaging, indoors, and out of direct sunlight at 40-100 F (4-38 C).

Shelf life: 2 years

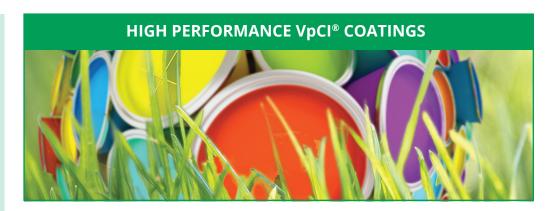

FEATURES

- Available in a ready-to-use version
- Works well on vinyl and plastic parts
- · Has excellent sheeting and beading properties on glass
- Contains corrosion inhibitors
- Improves gloss on any painted surface after washing with detergent
- Restores color on old painted surfaces
- Safe for use on all paint types, powder coatings, and epoxies
- Provides corrosion/rust protection to car wash equipment
- Environmentally friendly and nitrite-free
- · Protects finishes against UV aging
- Protects painted metal finishes up to 2 months
- UFI: 51SX-61Q9-4U1C-H5X6

APPLICATION

- Cars and motorcycles
- Boats
- House trailers and campers
- Snowmobiles
- Any painted metal surface

PHYSICAL PROPERTIES

Appearance	Off-White Emulsion
Density	8.1-8.3 lb/gal (0.97-0.99 kg/L)
рН	5-7 (Neat)

VpCI®-819

METHOD OF APPLICATION

VpCl®-819 Wax/Rinse should be applied to painted finishes with high, medium or low pressure spray. No other finishing treatment is necessary before air drying surfaces. VpCl®-819 Wax/Rinse can be wiped or buffed off surfaces, creating a deeper shine. The recommended dilution ratio is 1:10 with water. The average per car for car wash is 6-8 oz. (around 200m of diluted product).

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA Phone (651) 429-1100, Fax (651) 429-1122 Toll Free (800) 4-CORTEC info@cortecvci.com https://www.cortecvci.com https://www.corteccoatings.com

Revised: 09/21/20 . Supersedes: 10/09/13. ©Cortec Corporation 2002-2020 of Cortec® Corporation. All Rights Reserved. Copying and/or manipulation of these materials in any form without the written authorization of Cortec® Corporation is strictly prohibited. 2020, ©Cortec® Corp. ISO accreditation applies to Cortec's processes only.

Distributed by:



Valdamark Limited

Unit 13, 30 The Downs Altrincham, Cheshire, WP14 2PX, United Kingdom. valdamark@live.com Tel: +44 (0) 161 706 0388









