


## High speed steel reamers


### Hand reamers



Catalog no. 72610



- for small batch productions and repairs
- long taper lead, approx. 1/3 of cutting length tapered
- for interrupted hole e.g. split workpieces, hole interruptions, intersecting holes and similar
- with square to DIN 10
- $\leq \text{Ø } 3.75 \text{ mm}$  with external centres on both ends
- $> \text{Ø } 3.75 \text{ mm}$  with internal centres on both ends
- $\leq 1.75 \text{ mm}$  to company standard
- for tensile strengths up to a max.  $900 \text{ N/mm}^2$

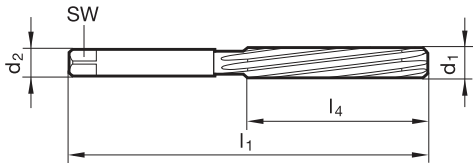

d1 mm	d2 mm	l1 mm	l4 mm	SW mm	Z	Code no.
2.000	2.000	50.000	25.000	1.600	4	2.000
2.800	2.800	62.000	31.000	2.100	6	2.800
3.000	3.000	62.000	31.000	2.400	6	3.000
4.000	4.000	76.000	38.000	3.000	6	4.000
4.500	4.500	81.000	41.000	3.400	6	4.500
5.000	5.000	87.000	44.000	3.800	6	5.000
6.000	6.000	93.000	47.000	4.900	6	6.000
7.000	7.000	107.000	54.000	5.500	6	7.000
8.000	8.000	115.000	58.000	6.200	6	8.000
9.000	9.000	124.000	62.000	7.000	6	9.000
10.000	10.000	133.000	66.000	8.000	6	10.000
12.000	12.000	152.000	76.000	9.000	6	12.000
13.000	13.000	152.000	76.000	10.000	6	13.000
14.000	14.000	163.000	81.000	11.000	8	14.000
15.000	15.000	163.000	81.000	12.000	8	15.000
16.000	16.000	175.000	87.000	12.000	8	16.000
18.000	18.000	188.000	93.000	14.500	8	18.000
19.000	19.000	188.000	93.000	14.500	8	19.000
20.000	20.000	201.000	100.000	16.000	8	20.000
22.000	22.000	215.000	107.000	18.000	8	22.000
24.000	24.000	231.000	115.000	18.000	8	24.000
25.000	25.000	231.000	115.000	20.000	8	25.000
28.000	28.000	247.000	124.000	22.000	10	28.000
30.000	30.000	247.000	124.000	24.000	10	30.000
32.000	32.000	265.000	133.000	24.000	10	32.000
34.000	34.000	284.000	142.000	26.000	10	34.000
35.000	35.000	284.000	142.000	29.000	10	35.000