


DN** holder (external) P-Clamping

PDJNR/L Kr: 93°



Right hand style

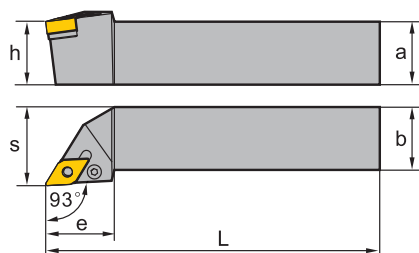

Article	*	Stock		Dimensions [mm]						Inserts
		R	L	a	b	L	h	s	e	
PDJNR/L1616H11	•	•		16	16	100	16	20	25	DN**1104**
PDJNR/L2020K11	•	•		20	20	125	20	25	25	DN**1104**
PDJNR/L2525M11	•	•		25	25	150	25	32	30	DN**1104**
PDJNR/L2020K15-3	•	○		20	20	125	20	25	35	DN**1504**
PDJNR/L2525M15-3	•	•		25	25	150	25	32	35	DN**1504**
PDJNR/L3232P15-3	•	•		32	32	170	32	40	35	DN**1504**
PDJNR/L2020K15	•	○		20	20	125	20	25	35	DN**1506**
PDJNR/L2525M15	•	•		25	25	150	25	32	35	DN**1506**
PDJNR/L3232P15	•	•		32	32	170	32	40	35	DN**1506**

• Ex stock ○ On demand

* With internal cooling

Spare parts		DN**1104**	DN**1504**	DN**1506**
	Insert h	16-32	20-32	20-32
	Knee lever	L3	L4	L4B
	Screw		LEM8×21 (10.2 Nm)	LEM8×21 (10.2 Nm)
	Screw	LEM6×13.4A (7.0 Nm)		
	Shim	D11AP	D15AP	D15AP
	Shim pin (shim)	SP3	SP4	SP4
	Wrench	WH25L	WH30L	WH30L

Insert					
Wiper	Finishing	Medium Cut	Roughing	Cast Iron	PCBN/PCD
A62	A63	A63	A68	A69	A178

System code > A228

Grade selection > A42

Technical info > A501

Cutting data > A366