


MASON-LITE

by MFI • Masonry Fireplace Industries, Inc.

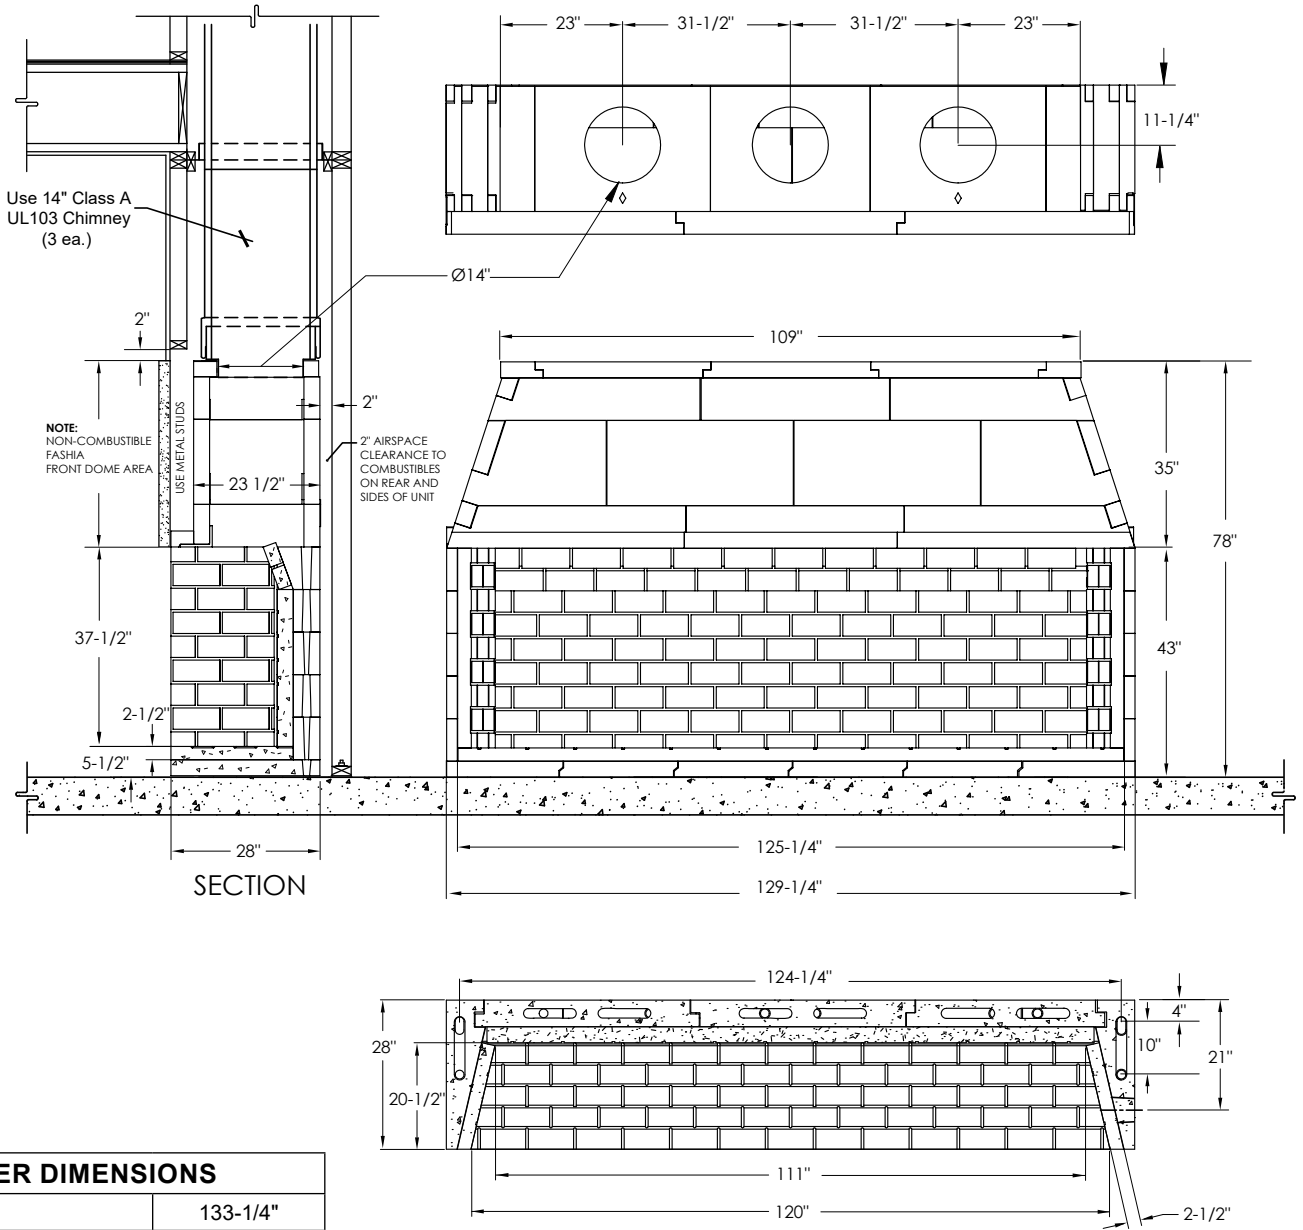

OTHER DIMENSIONS	
Framing Width	133-1/4"
Framing Height	80-1/4"
Framing Depth	30"
Floor Area (129.25 x 28)	25.14 sf
Fireplace Weight	4805 lbs.
Mortar and Rebar	130 lbs
Ready Mix	720 lbs.
Flue Size - Class A	Triple Ø14"
Metal Chimney Weight per foot	12 lbs.

ACCESSORIES		
Anchor Plate/Damper	14DCA-APD	19 lbs.
Ø4" Combustion Air Kit	MFP4-AK-M	6 lbs.

OTHER INFORMATION
Firebox must be lined with firebrick (ASTM-C1261) 9 x 4 x 2.5 (Qty. 241 ea.)

ALL DIMENSIONS ARE IN INCHES.

* ALL VERTICAL DIMENSIONS SHOWN ARE DRY STACK MINIMUM, HIGH TEMPERATURE MORTAR THICKNESS WILL INCREASE THESE DIMENSIONS WHICH MAY ADD UP TO 1 INCH (NOMINAL) TO THE OVERALL HEIGHT.

Important: 2 inch minimum clearance to combustibles from the Dome Top must be maintained.

Note: If your installation is on combustible floor, the total fireplace height will increase due to the addition of the required CMU blocks, cement board & insulation blanket.

MODEL: MFP120-RGL

DWG. NUMBER	RELEASE DATE	REV. DATE
S-RGL005	06/20/2023	06/20/2023