
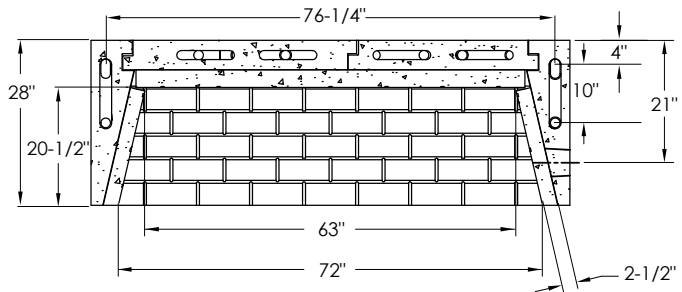


# MASON-LITE

by MFI • Masonry Fireplace Industries, Inc.

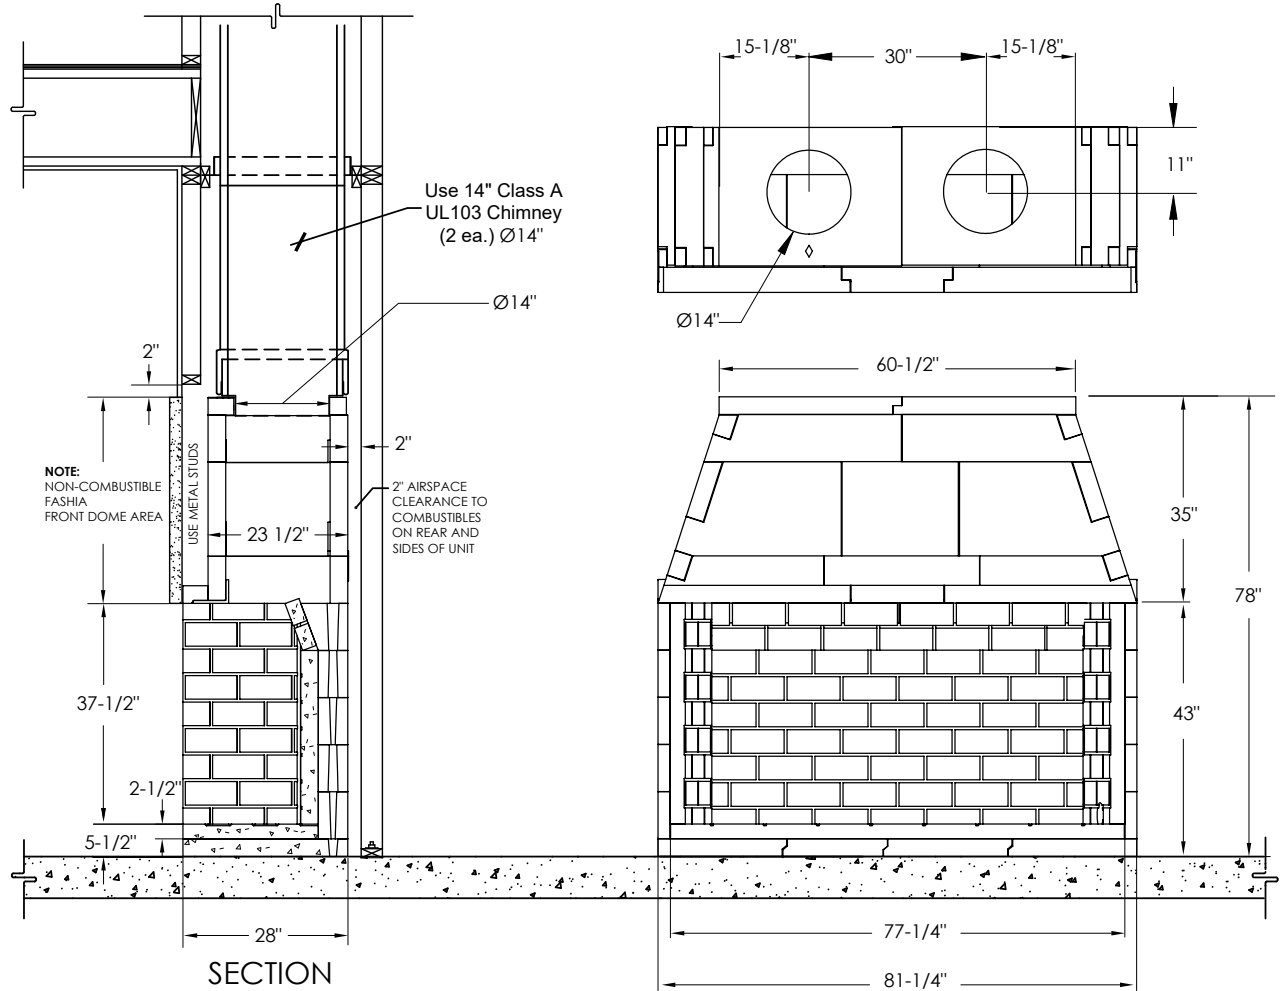

OTHER DIMENSIONS	
Framing Width	85-1/4"
Framing Height	80-1/4"
Framing Depth	30"
Floor Area (84.25 x 28)	15.80 sf
Fireplace Weight	3330 lbs.
Mortar and Rebar	130 lbs
Ready Mix	540 lbs.
Flue Size - Class A	Dual Ø14"
Metal Chimney Weight per foot	12 lbs.

ACCESSORIES		
Anchor Plate/Damper	14DCA-APD	19 lbs.
Ø4" Combustion Air Kit	MFP4-AK-M	6 lbs.

OTHER INFORMATION
Firebox must be lined with firebrick (ASTM-C1261) 9 x 4 x 2.5 (Qty. 158 ea.)

ALL DIMENSIONS ARE IN INCHES.

\* ALL VERTICAL DIMENSIONS SHOWN ARE DRY STACK MINIMUM, HIGH TEMPERATURE MORTAR THICKNESS WILL INCREASE THESE DIMENSIONS WHICH MAY ADD UP TO 1 INCH (NOMINAL) TO THE OVERALL HEIGHT.

**Important:** 2 inch minimum clearance to combustibles from the Dome Top must be maintained.

**Note:** If your installation is on combustible floor, the total fireplace height will increase due to the addition of the required CMU blocks, cement board & insulation blanket.

## MODEL: MFP72-RGL

DWG. NUMBER	RELEASE DATE	REV. DATE
S-RGL001	06/20/2023	06/20/2023