


Lead Free Brass Ball Valve

2 Piece, Full Port, Press x Hose Connection with Cap and Chain, Stainless Steel Trim, 250 WOG

P-100HPG

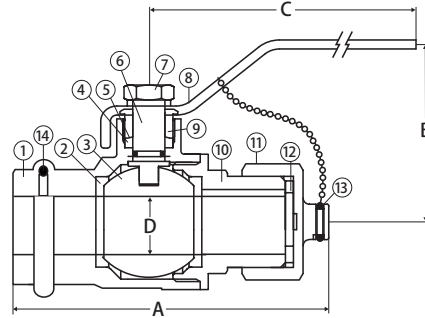

FEATURES

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Cap and Chain for Easy Drain and Hose Connection
- Heavy Steel Chain
- Blow-Out Proof Stem
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Content

CERTIFICATIONS/APPROVALS

Conforms to IAPMO PS 117

PRESSURE/TEMPERATURE RATING

250 WOG
Max. 250°F

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	Seat	PTFE
3	Ball	304 Stainless Steel
4	Packing	PTFE
5	Stem O-Ring	NBR
6	Stem	304 Stainless Steel
7	Handle Nut	Steel - Chrome Plated
8	Handle	Steel - Chrome Plated
9	Packing Nut	Brass - C37700
10	End Connection	Lead Free Brass - C46500
11	Cap Nut	Brass - C37700
12	Gasket	EPDM
13	Chain	Steel - Chrome Plated
14	O-Ring	EPDM

DIMENSIONS

Part No	Size	A	B	C	D
100-673G	1/2" x 3/4" Hose	3.38	1.81	3.46	0.59
100-674G	3/4" x 3/4" Hose	3.74	2.09	4.29	0.75