

Key	Part	Description	Key	Part	Description
1	R6E7	Spindle Screw Set	12	R6A15	Spindle
2	R4F15	Handle Assembly	13	R6J7	Spindle Washer
3	R6P1	Nitrile Washer	14	R5G3	Drag Pawl Spring
4	R6D1	D Washer x 2	15	R7J9	Drag Pawl
5	R7D13	Drag Adjusting Nut	16	R7K11	On/Off Lever/Activator
6	R7B/C19	Friction Washer Set	17	R5E10	Ratchet Button
7	R4A	Spool Only	18	R2G12	Base Lock Spring
8	R7L3	Silent Drag Cam	19	R6F3	Dome Nut
9	R5B6	Fish Alert Wheel	20	R2D2	Base Bolt
10	R7H4	Drag Tube Friction Wash	21	R2H1	Lever & Rivet
11	R7A8	Friction Tube	22	R2A1	Index Plate Assembly



55GD



CONGRATULATIONS and thank you for purchasing one of our Australian made rock series as your choice of fishing reel. These reels are constructed from the highest quality materials to ensure your reel will last for many years.

Plus, all these other advantages -

Long, accurate casts:

Now, with only the minimum of practice you will be able to cast further and more accurately than ever before.

Control large fish with ease: Powerful one-to-one direct wind means you only need about a quarter of the effort required to lift a similar weight on a spinning reel.

You can fish harder and longer: Simple, rugged construction means you can forget that fiddly maintenance, because your Alvey reel will resist the effects of saltwater and sand.

Special Features

- → One Way Drag
- → Graphite Back
- → Multi-plate Clutch
- → Cam Operated On/Off Drag Switch
- → Fibreglass Spool

More comfortable fishing: Low winch-mount rods let you fish with your arms in a relaxed position.

No line twist: Use a small free-running swivel as the last piece in any rig and you'll minimise any line twist. (See illustrations inside)



Alvey 10 Year Guarantee: Any faulty Alvey part or reel will be replaced at no charge providing the manufacturer finds the part or reel has had normal usage and attention.

Reel Icon Pty Ltd Trading as Alvey Reels Australia ABN 57 625 261 707 2-6 Antimony Street Carole Park Qld 4300 t: +61 7 3271 2844 f: +61 7 3271 2451 For more hints and tips on maintenance, please visit the **spare parts** page at **www.alvey.com.au** e: info@alvey.com.au #alvevreels

Recommended Line Size

Your 55GD reel will hold approximately 500 metres of 4 kg line. If fishing near rocks or other hazards use heavier line to help avoid line breakage.

Filling the Spool with Line

Always take the line from the front of the dispenser, never the side.

Wind firmly and evenly onto the spool, spreading the line with your fingers to give a smooth casting base.

Never stretch a nylon monofilament onto a spool; when it goes back to its original length it will exert strong enough crushing action to damage your spool.


Never allow loose coils to develop on your spool through careless uneven winding.

Adopt the habit of applying light finger tension when retrieving line and spread evenly over its bed.

> The Simple method for LONG DISTANCE **SURF CASTING** With the world's best side-cast reel – ALVEY!

1. To begin, place fingers of left hand on spool lip and thumb on release lever. Press lever... turn spool

2. Turn spool a full quarter to open-face casting position.




Selecting a Rod

Your rod and reel outfit should be balanced so you can hold it comfortably over long periods. A matched set. which has a point of balance where it's held in the left hand, will give you the most comfortable posture. The ideal rod for this reel should be 2.4 to 3.2m in length.

The use of a short butt brings the reel into a natural position for rewinding with your elbows at your side and without strain.

3. Release line from open runner. Trap line at Restrain line reel base. with thumb on spool.



5. Casting action: Punch hard with right hand, pull downward \with left hand.

6.Casting drive: Follow through while releasing (line grip as power is applied. Rod butt must clear left leg.

7. End of cast: Turn drum back to fishing position.

8. Return line to open runner.

9 & 10 A comfortable fishing position makes hooking, playing or landing a fish more efficient.

If you're left-handed simply carry out above instructions the other way round.


Rigs & Swivels

When used properly a brass swivel is a very inexpensive and efficient way to keep a fishing line in good condition. Curls and twists in a line can be caused by many things, but can be kept to a minimum by the correct use of a swivel

Swivel Sizes

Line breaking strain	Swivel size		
1 – 5 kg	No 14		
5 – 8 kg	No 12		
8 – 15 kg	No 10		
15 – 20 ka	No 9		

Swivel must be above sinker

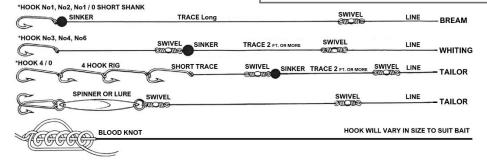

55GD



One Way Drag Models

The one-way series of reels allows line to be released under a pre-set pressure. The extra advantage, for rock fishing in particular, is that you have the ability to override the drag setting as the handles are attached directly to the spool. This will provide you with maximum winding power when needed without the worry of the clutch slipping. The position of the star on the front of the reel also allows easy adjustment while playing a fish.

Setting the Drag

Make sure the drag activating lever on the back of the reel is in the 'On' position. Using a small spring balance to pull the line off the reel. Set the tension of the drag to be approximately one third of the breaking strain of your line by rotating the drag tensioning star on the front of the reel. (Clockwise to increase tension.) It is better to have the drag set light as a short sharp run from a large fish could snap the line on an over set drag.

The drag is easily adjusted while fighting the fish and the unique style of the Alvey reel allows extra drag pressure to be applied directly to the spool by using the palm of your hand against the bottom of the reel.

Playing the fish

Once the fish has been hooked always keep a bend in the rod by holding it at an angle to the fish. With the power of an Alvey reel you are in control. Do not rush the fish. Allow the drag to tire the fish. Many times the fish is lost in the shore break. Keep a steady tension on your line, a bend in the rod and ease the fish ashore.

Fish Alert

When leaving the rod and reel unattended, activate the fish alert on the back of the reel. If a fish takes line a warning noise will be heard.

Maintenance

To lubricate your reel, remove the spindle screw and put 4 to 5 drops of light machine oil down the hole. Then lightly oil the handle, index mechanism and drag pawl. After each day of fishing relieve the drag tension, wash off salt and sand and lubricate as above before storage.