



## PEDESTAL MOUNT **PART# 15-150B**

This mounting kit has been designed for use with your Dickinson BBQ. It will fit the following products:

- Sea-B-Que Small
- Sea-B-Que Round
- Sea-B-Que Large
- Spitfire 180 Grill

While this BBQ mount is a very strong and durable mount, it is not recommended to leave the Bar-B-Que attached to the mount whilst underway, especially in rough seas. It is recommended to remove the BBQ whenever the boat is moving as the high center of gravity could pull the mount from the deck

### **Included Parts**

- 1 Pedestal Mount column
- 1 Pedestal Deck Mount Bracket
- 1 H-Bracket
- 1 C Bracket BBQ Mount
- 2 ¼-20 Lockwashers
- 2 ¼-20 Acorn Nuts

## Instructions for Use

### Assembling the Mount



1. Identify where you are going to install the mount on the deck and attach the pedestal mount base to the deck by securing all the mounting holes (A) with deck screws. The base has an overall diameter of 7" and the ring of mounting holes has a diameter of 5.75"




2. Once the pedestal mount base is secure, twist the base of the pedestal mount column into the base. Turn the column clockwise until it will not turn anymore.



3. Place the C-bracket onto either set of the mounting studs on the pedestal column. Which studs depends on the direction you would like your BBQ to face.
4. Place the 1/4-20 lock washers over the studs
5. Tighten the 1/4-20 acorn nuts onto the studs using a 7/16<sup>th</sup> wrench or socket.

#### **Attaching the H Bracket:**

Remove the 10-32 nuts on the studs on the bottom of the drip tray holder then place the “H” bracket onto the studs in the position indicated below and then tighten the nuts onto the studs with a 3/8ths socket.

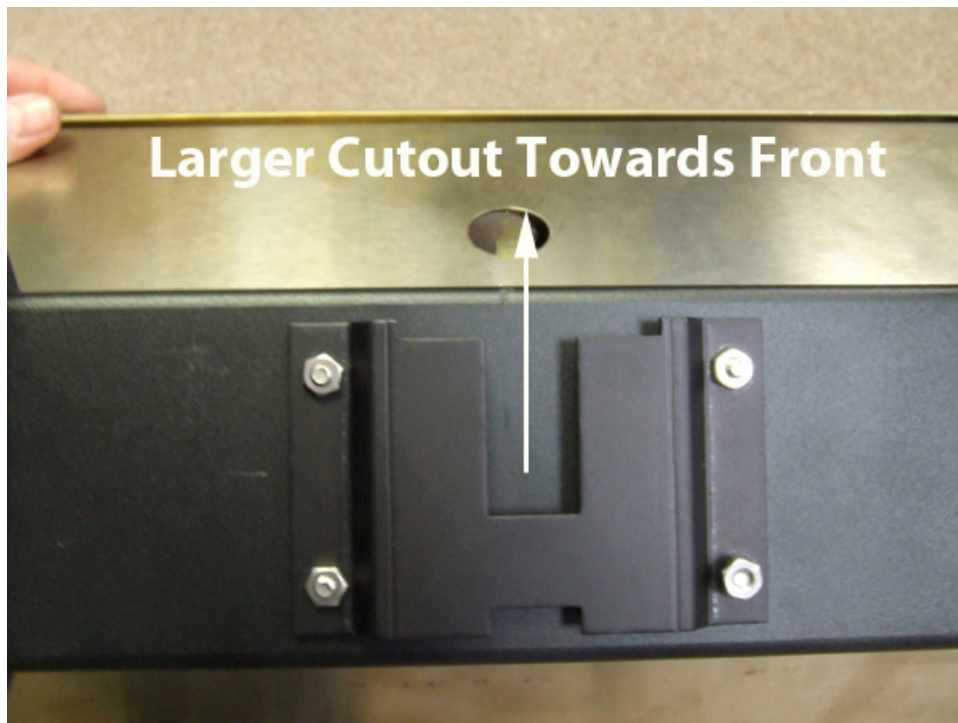



# CAUTION

## LATCH CAN BE EASILY DAMAGED ON FIRST USE

When you are first installing your new Dickinson BBQ mount, DO NOT hook the end of the latch onto the end of the mount bracket. This can cause damage to the latch and invalidate your warranty.

