



www.DaystarWeb.com
Tech Support Contact Info
Tech@DaystarWeb.com
Phone: 623.907.0081
Fax: 623.907.0088
841 South 71st Avenue
Phoenix, AZ 85043

KT09120
2005-2012

Toyota Tacoma Easy install front and rear block lift.
4wd & 2wd 6 lug only



Instruction Sheet P11032-02
2008 Daystar Products International Inc.


1 of 4 pages

Installation Steps

1. Read all instructions and check bill of materials and tools before beginning.
2. Disconnect the negative battery cable.
3. Place the vehicle on a clean and level surface. Set the parking brake and place wheel chocks behind the rear wheels. Jack up the front of the vehicle by the frame with a floor jack and support vehicle at the frame rails with approved jack stands. **NEVER WORK UNDER AN UNSUPPORTED VEHICLE.**
4. Disconnect the ABS and brake lines from the upper a-arm and spindle (10mm and 12mm bolts.)



5. Disconnect the sway bar on both sides at the spindle. (17mm bolt.)

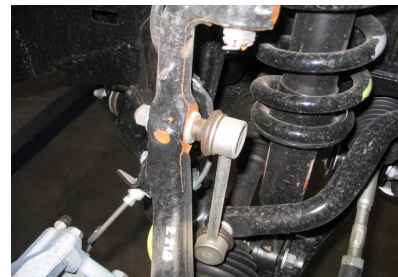

6. Remove the upper strut nuts.(14mm nuts) You will need to reuse them later.
7. Remove upper ball joint nut (19mm nut) and separate the ball joint from the spindle by hitting the side of the spindle. **DO NOT** use a ball joint separator tool it can damage the ball joint boot.




Installation Steps

8. Remove the lower strut bolt and nut (19mm) .
9. Remove the strut from the vehicle.
10. Install the stud extenders and spacer on the top of the strut plate. Use the supplied Loc-Tite on the stud extenders and tighten.



11. Reinstall the strut into the vehicle and tighten the upper strut nuts. You will have to push up on the upper a-arm to get the strut back in.
12. Reinstall the suspension working in reverse order.



13. Recheck all bolts after 500 miles.
14. Daystar Recommends that you have your wheel alignment checked.

TOOLS NEEDED

1. Floor Jack
2. Jack stands
3. Wheel chocks
4. Set of metric tools from 10mm to 19mm
5. Hammer

Bill of Materials

<u>Part No.</u>	<u>Description</u>	<u>Qty</u>
M03724	Spacer	2
S11057	Stud ext	6
P11132	Instructions	

Instruction Sheet P11032-02

2008 Daystar Products Intl

Page 3 of 4


Rear instructions sheet.

Rear Bill of Materials

Part No	Description	Qty
S10967	BLOCK	2
S10958	U-BOLT	4
S10959	NUT	8
S10963	WASHER	8

15. Jack up the rear of the truck and place 2 jack stands under the rear frame and lower down and remove the rear wheels.
16. Place the floor jack under the rear axle and remove the 4 u-bolts and nuts and lower down the axle enough to fit the lifting blocks into position.
17. **IMPORTANT!** Note that the lift block is tapered. Position the block on the axle pad so that the thick end of the block is toward the rear of the vehicle.
18. Install the new u-bolts, washers, and hex nuts. Torque to 95ft-lbs
19. Install the rear wheels and place back on the ground. Torque the lug nuts to factory specifications.
20. Double-check all fasteners for proper clearances and torque specifications.

- | |
|---|
| <ol style="list-style-type: none">1. OE SPRING2. LIFT BLOCK (thick end to rear of vehicle!)3. U-BOLT 9/16-184. OE U-BOLT PLATE5. NUT & WASHER |
|---|

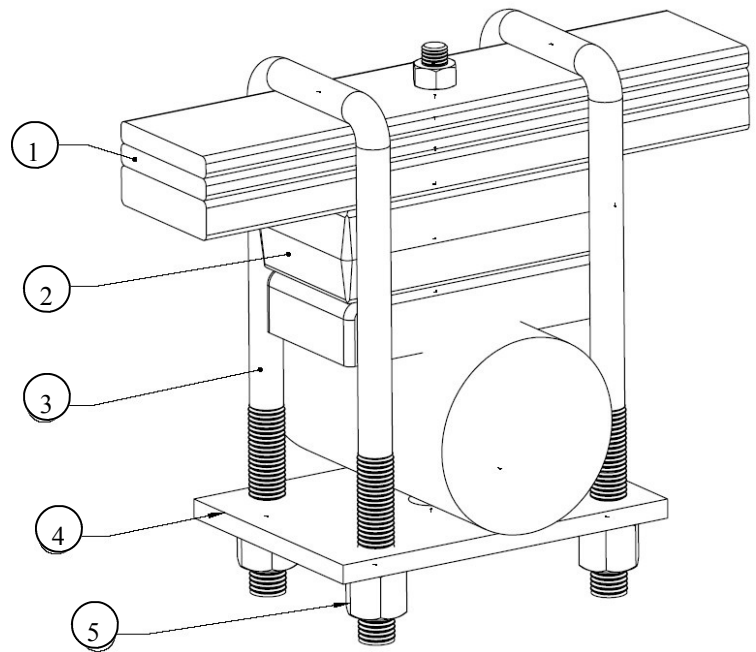

WARNING

This vehicle has been modified to enhance its performance. The steering, braking and handling of this vehicle will differ from standard passenger cars and trucks. This vehicle handles differently from an ordinary vehicle in driving conditions which may occur on streets, highways and off road. Avoid unnecessary abrupt maneuvers, sudden stops, sharp turns and other driving conditions that could cause loss of control, possibly leading to a roll over or other accident that could result in serious injury or death to driver and passengers. If larger tires are installed the speedometer will read lower than the vehicles actual speed.

DRIVE WITH CARE, REDUCE SPEED AND WEAR SEAT BELTS AT ALL TIMES.

IMPORTANT NOTE: The advertised amount of lift that this kit provides and the thickness of the spacers supplied will not be the same! For example, a 2-1/2" lift may only have 1-1/2" thick spacers. The reason for the difference between the spacer thickness and the amount of lift has to do with suspension geometry. There is a ratio involved, and it is this ratio that determines the thickness of the spacers. Rest assured, installing the spacer supplied will result in the proper amount of lift out at the wheel.

Instruction Sheet P11032-02

**2008 Daystar Products Intl
Page 4 of 4
Page 4 of 4**