



37120KIT – 37160KIT Instructions

You have purchased the finest Micro/Mini Sprint 10 Degree Adjustable Containment Seat Kit available. These components (when installed correctly) are designed to reduce injury-producing movement of the upper body and head during a racing impact, but no device or component can prevent all injuries that may occur in auto racing. **Auto racing remains a**

very dangerous sport regardless of any protective devices you may use. Please read the instructions very carefully and if you have any questions please contact Kirkey Racing Fabrication Inc. 1-800-363-4885

FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE SERIOUS INJURY OR DEATH

This seat is designed in three parts for maximum vertical adjustment.

Step 1- Shoulder Vertical Height Adjustment.

You have the choice of five (5) different vertical positions that can be used to set the shoulder height position, (see photo #1). Seat shoulder height should be level or slightly lower than drivers shoulder height, (see photo #2). As a base starting point you can bolt seat bottom and seat torso parts together in the middle neutral position, keep bolts loose for now. Have driver sit in seat with bottom seat cover installed. Lower or raise torso portion of seat to adjust correctly. With the shoulder at the correct position use the pre punched holes and six (6) 3/16" bolts and nuts provided to join the bottom and torso together. DO NOT overtighten bolts.

Step 2- Setting the Head Restraint Vertically and Horizontally.

You have the choice of five (5) different vertical positions that can be used to set the head restraint position, (see photo #3). Ideally you want the head restraint positioned level with the drivers cheekbone, (see photo #4). With the seat cover installed, have the driver look to the left and to the right to ensure that their peripheral vision is not obstructed. If peripheral vision is obstructed adjust accordingly.

You have the choice of four (4) different horizontal positions, (see photo #5). This is a driver preference; adjust so driver is comfortable with head position. With the head restraint in proper position fasten to seat using the two connector brackets and bolts, nuts and washers provided. Use the pre-punched holes and five (5) of the 1/4" x 3/4" bolts, flange nuts and washers provided for each side.

NOTE: This head restraint also can be moved laterally to the left an additional 1/2" to bring right side head pad closer to driver's helmet, (see photo #5). Head can also be rotated down at the front 3/4" to give driver more peripheral vision. Loosen three (3) connector bracket bolts on each side of shoulder and rotate to driver's preference.

Torque all of the 1/4" bolts ten (10) in total, to 10ft. lbs. NOTE: Re torque after each race.

Hardware List: 10- 1/4" x 3/4" bolts 10- 1/4" Hardened washers 10- 1/4" Flange lock nuts
6- 3/16" x 1/2" bolts and lock nuts 2- Connector Brackets

MOUNTING INSTRUCTIONS

For the bottom we recommend that you use no less than two (2) 5/16"(8mm) bolts directly through the bottom to frame, (spread the bolts out as far as possible to distribute the load). For the back we recommend no less than three (3) 5/16" (8mm) bolts using the mounting area in the shoulder box of the seat, (see photo #6). NEVER mount to sheet metal.

For additional strength we highly recommend that head restraint is mounted to A-frame using C plates, part # 99216 (see photo #7) – Included with KIT.

If you are not qualified to perform such fabrication have the installation done by an expert familiar with the requirements of such installation.

Be sure to check with your sanctioning body and/or track for their rules and regulations on seat mounting.

Photo #1

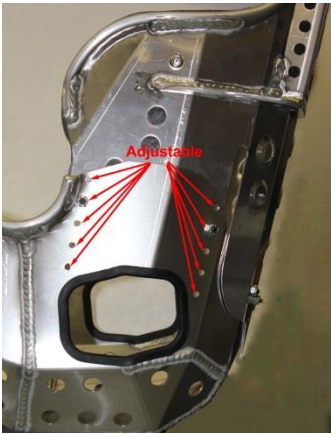


Photo #2

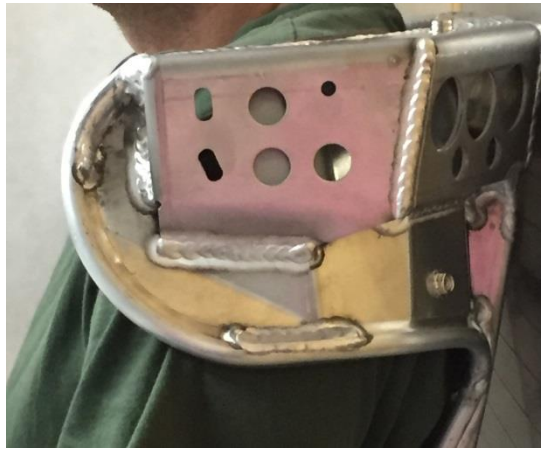


Photo #3

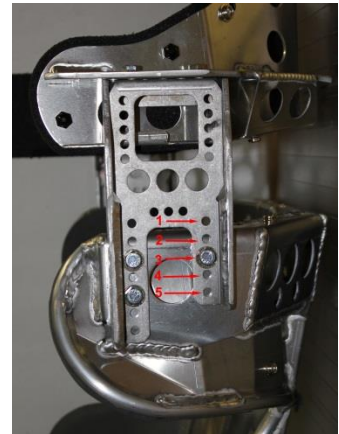


Photo #4



Photo #5

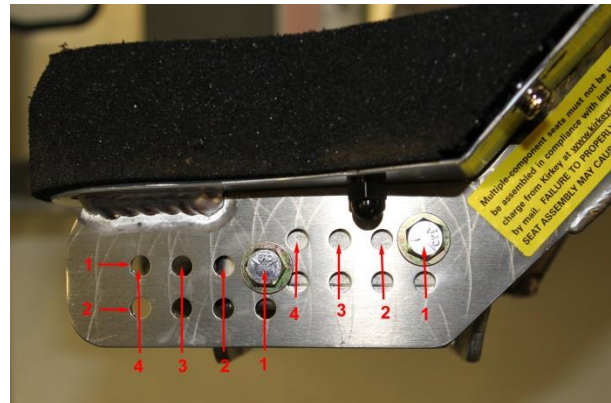


Photo #6



Photo #7



For more information please contact us

www.kirkeyracing.com
 1-800-363-4885 (voice)

kirkey@kirkeyracing.com
 1-800-829-7072 (fax)

Not intended for highway or airplane use