

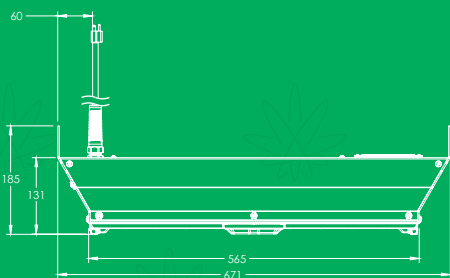


DRAGON S *turbo*

HORTICULTURE
LED LIGHT

The **DRAGON S turbo**, is a high output home grower or small commercial veg to flowering light. With 450 watts of power harnessed by our patented optical system, it projects more light onto and into the plant canopy than LEDs ever have before. The **S turbo** utilizes active cooling with specialized exhaust chambers that help promote transpiration while light is projected with unparalleled evenness, leaving *all* your plants happy and healthy.

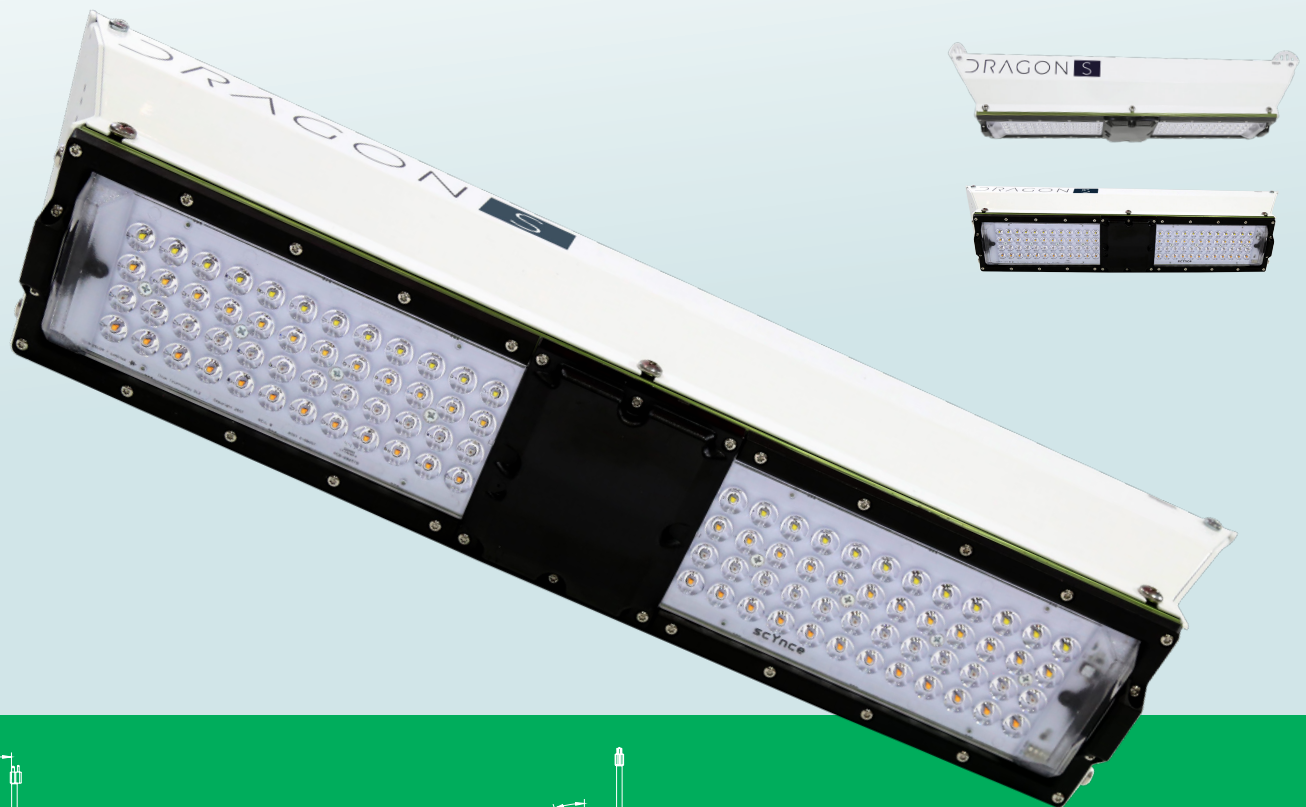

POWER: 450w

INPUT VOLTAGE: 120 - 277V

AMPS: 120v-3.75 / 240v-1.9 / 277v-1.6

POWER FACTOR / EFFICIENCY: >0.9 / 93%

DIMENSIONS: 26.5" x 7" x 5"

WEIGHT: 22 lbs

WATERPROOF SEALING: IP66 Rating (entire light fixture)

CERTIFICATIONS / TESTING: UL, FCC, RoHS, CSA

UL1598, UL8750, UL8800, CSA C22.2 NO. 250.0-08, CSA C22.2 NO. 250.13

WARRANTY: 5 years

THERMAL MANAGEMENT: Active - IP67 rated fan

SPECTRUM: Full spectrum white (cool & warm) with both deep & far red

SECONDARY OPTICS: patented 120° lenses

DIMMING: full digital control of spectrum, recipes and scheduling



FLUX (PPF): 842 $\mu\text{mol/s}$

EFFICACY: 1.87 $\mu\text{mol/j}$

PAR (PPFD): up to 1,135 $\mu\text{mol/m}^2/\text{s}$ in a 3'x3' tent @ 15"

COVERAGE AREA: Flower = up to 4'x4' Veg/Clone = up to 5'x5'

* Detailed PAR maps available at: www.scynceled.com

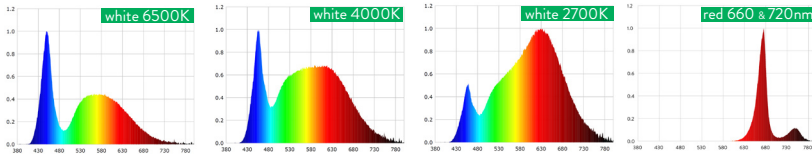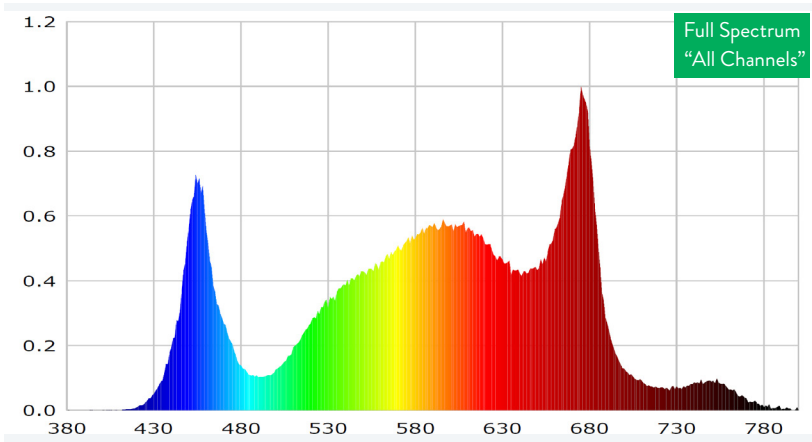

SPECTRUM

The DragonS has 4 channels of LEDs: cool, natural and warm white with a red kicker including both 660nm and 720nm for the Emerson effect.

CONTROL

Connect through our proprietary wireless network to gain complete control over the spectrum. Dial in the exact recipe of light your plants need with Theia, our mobile app.

OPTICS


Our patented optics allow plants to see equal intensity light from all angles (similar to natural light), resulting in a larger growing surface with more density below the canopy. Optically focused light prevents hot or burned spots & minimizes off grid collateral light loss.

SECONDARY OPTICS

The **120 degree** optic is the ideal choice for vertical and indoor applications where the lights need to be mounted at a height between 6” and 36”, providing an equal distribution of light over the canopy.

The **70 degree** optic was designed for greenhouses (perfect as a supplemental light source) and indoor applications where the lights need to be mounted at heights between 4’ up to 14’ over the canopy.

LIGHT DISTRIBUTION CURVE

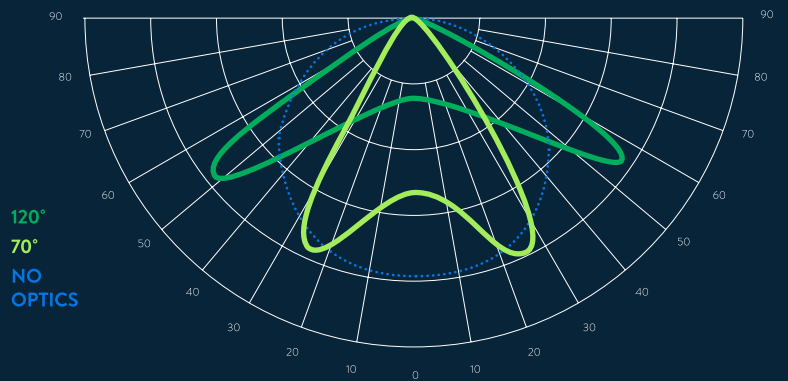

CONTROLS




FEATURES

- Android & iOS based app
- Wirelessly to a Single Light
- Group control lights via our wireless mesh network.

FUNCTIONS

- Intensity / Dim to Zero
- Ramp on Time (sunset/sunrise)
- Time on and off / Scheduling
- Custom Spectrum & Light Recipes

Scan to visit this page @ scynceled.com



DRAGON S turbo

